



# Conceptual Design

## Entwurf und Bemessung

## Design Criteria

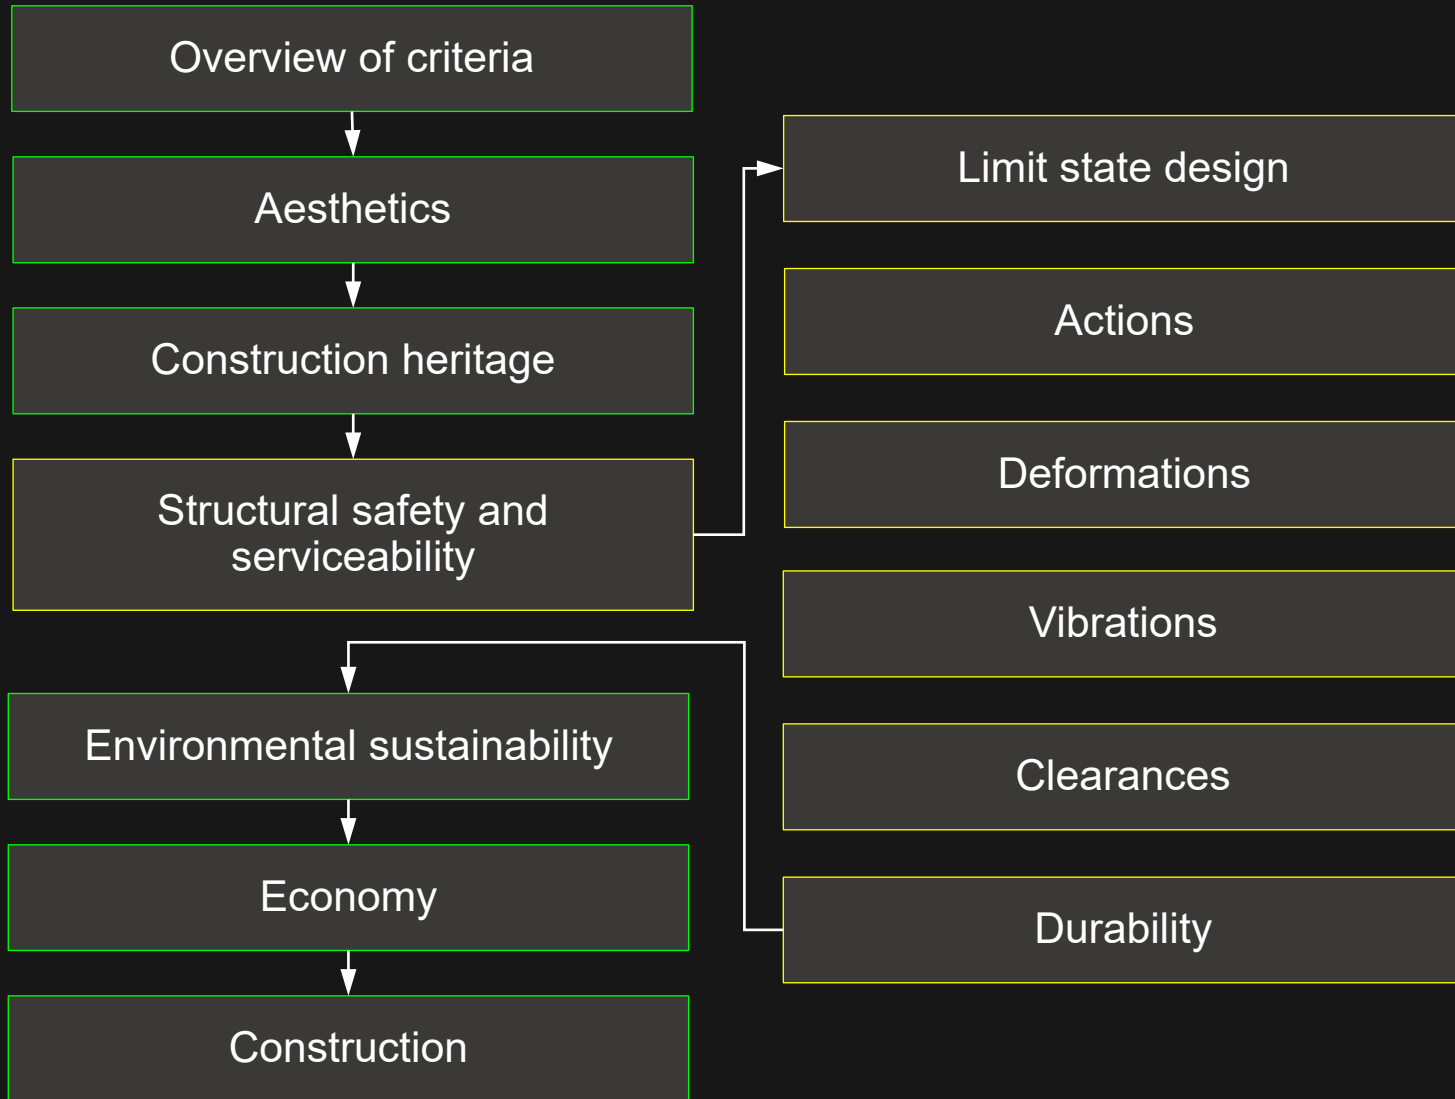

## Holistic design

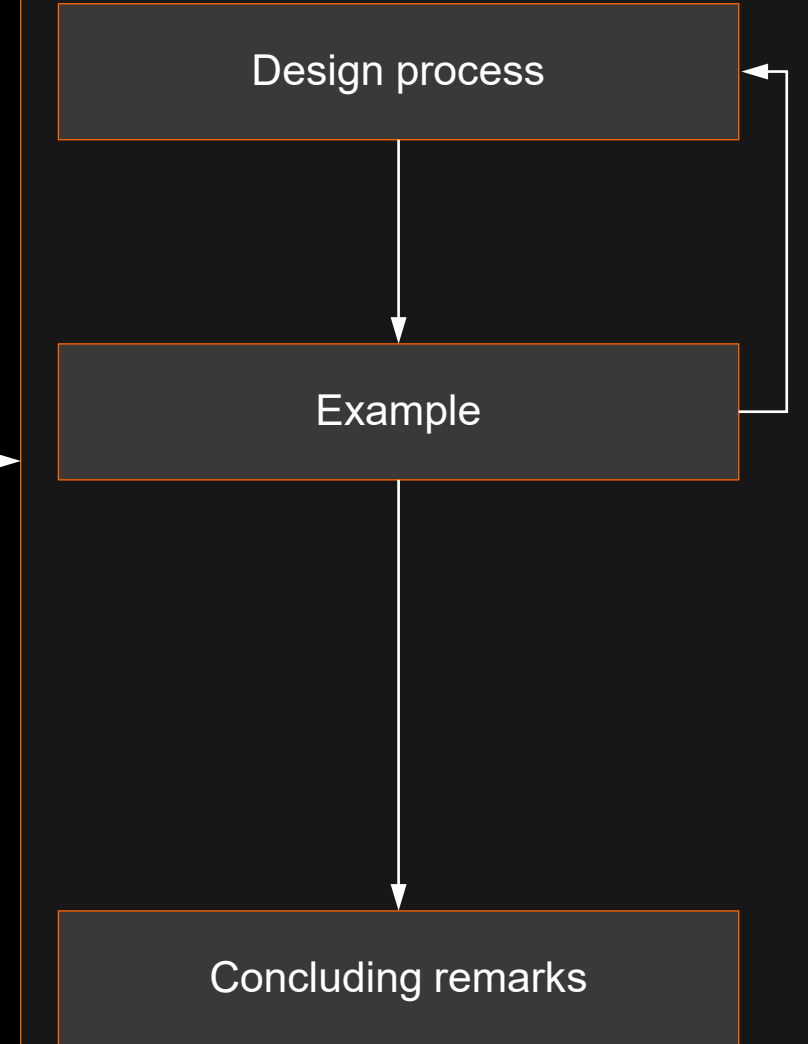

# Conceptual Design


Design Criteria – Overview  
Entwurfskriterien – Übersicht

# Design Criteria – Overview

- Designing a bridge means developing its **Structural Concept (Tragwerkskonzept)**, based on the given boundary conditions
- According to SIA 260, the **Structural Concept** defines
  - the chosen **structural system**
  - the most important
    - ... **dimensions**
    - ... construction **material properties**
    - ... constructional **details**
  - the envisaged **methods of construction**


The choice of the **structural system** must not be seen as a task limited to purely technical aspects (neither in bridges nor in buildings).

In the following, the **bridge-specific** aspects of structural design are dealt with.

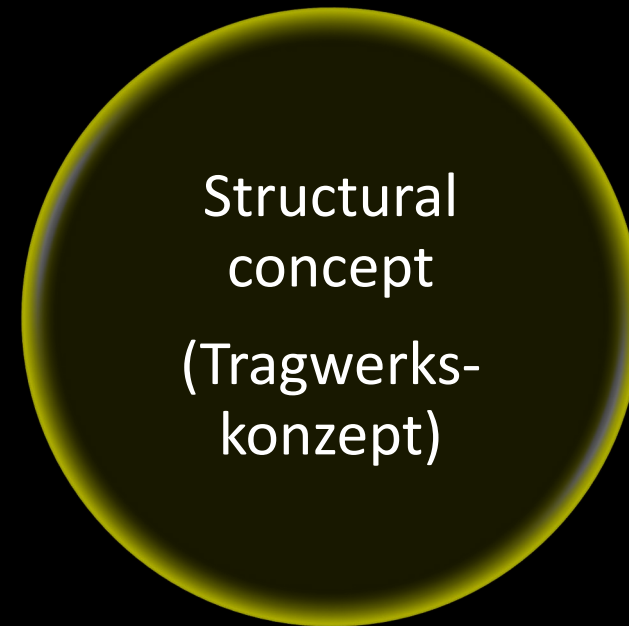


# Design Criteria – Overview

- Recommended reference: SIA 260 *Basis of Structural Design*

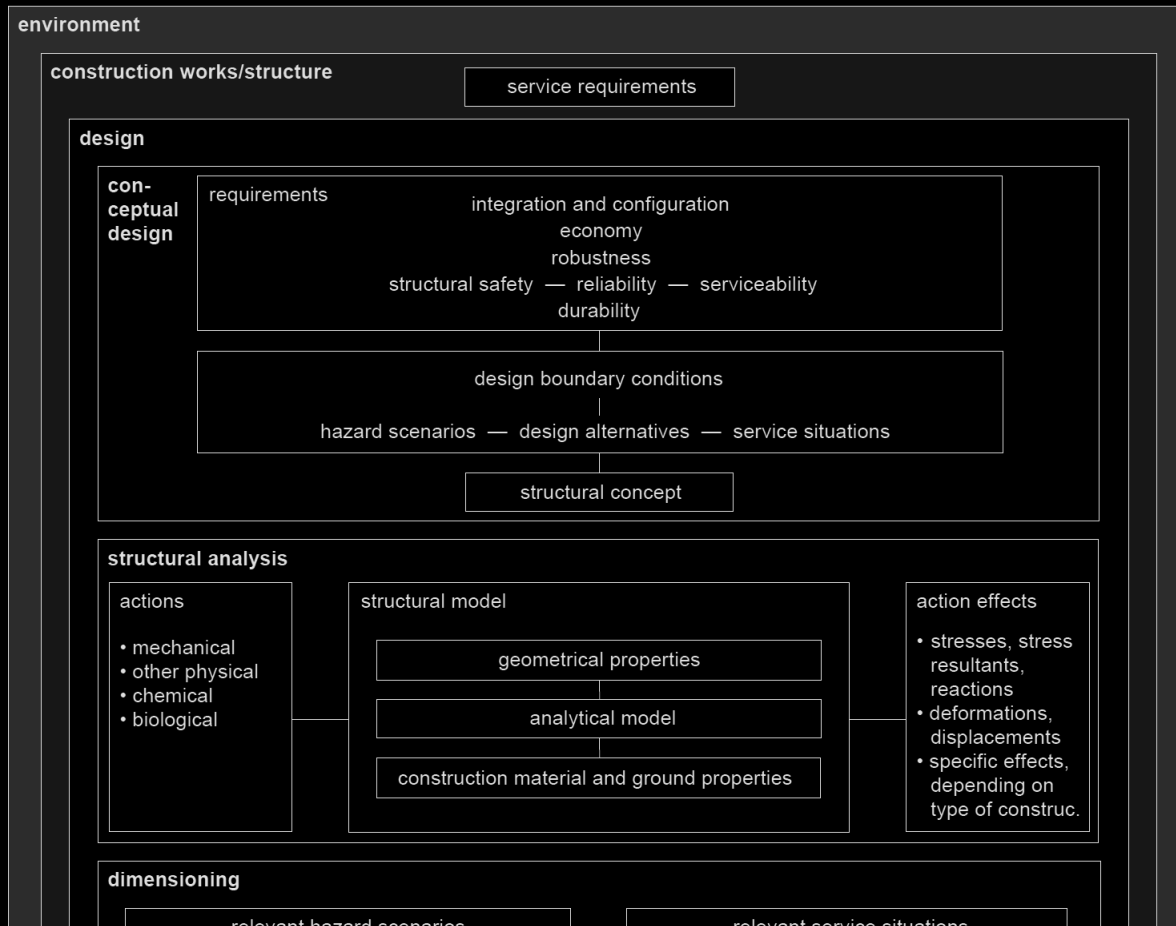

(continues on right side)


(continued from left side)

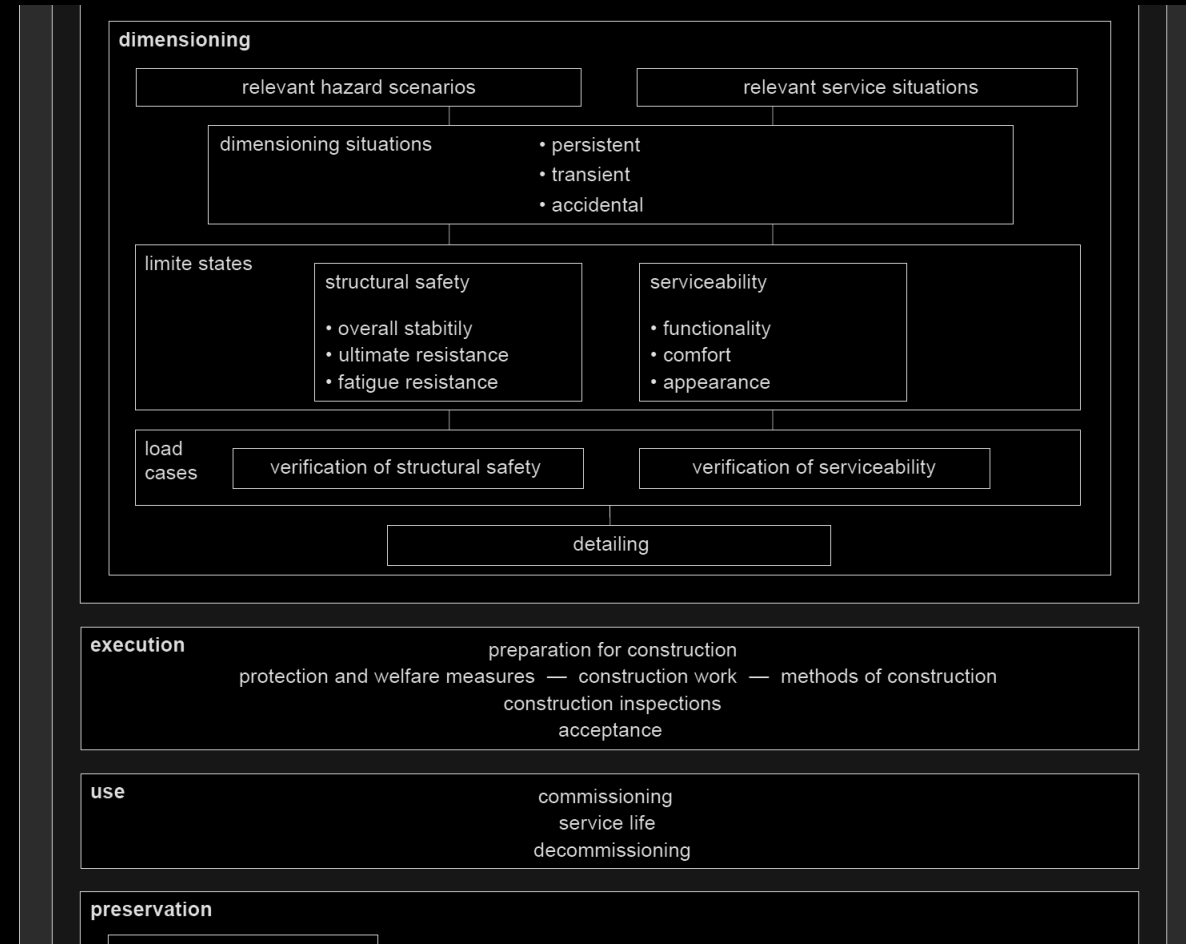

(continues)


# Design Criteria – Overview

- Designing a bridge means developing its **Structural Concept**, based on the given boundary conditions
- Designing a bridge is a **multi-faceted task**, where many different topics are to be **mastered by structural engineers**

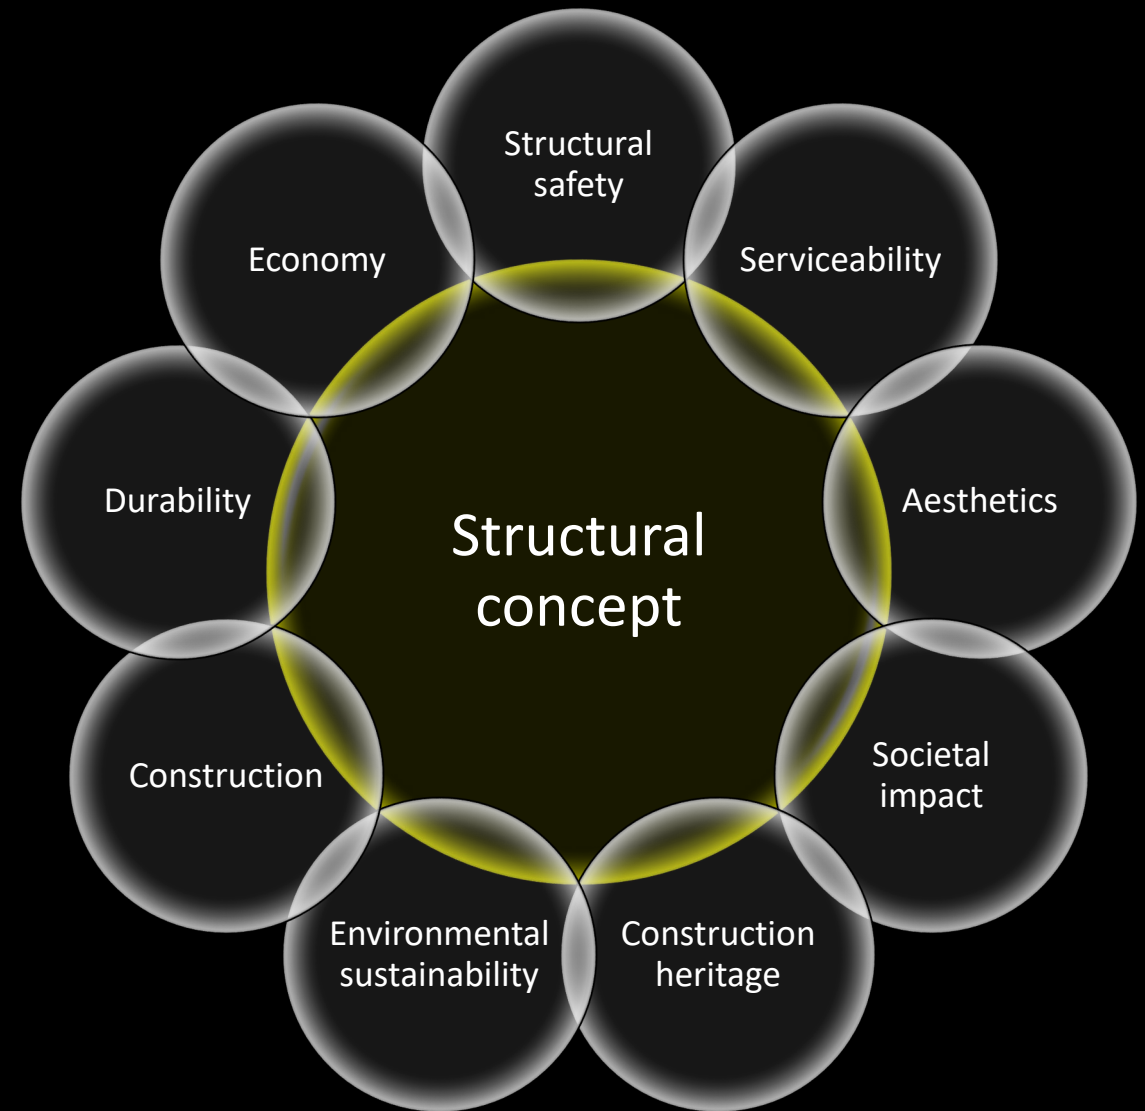

# Design Criteria – Overview

- Designing a bridge means developing its **Structural Concept**, based on the given boundary conditions
- Designing a bridge is a **multi-faceted task**, where many different topics are to be **mastered by structural engineers**

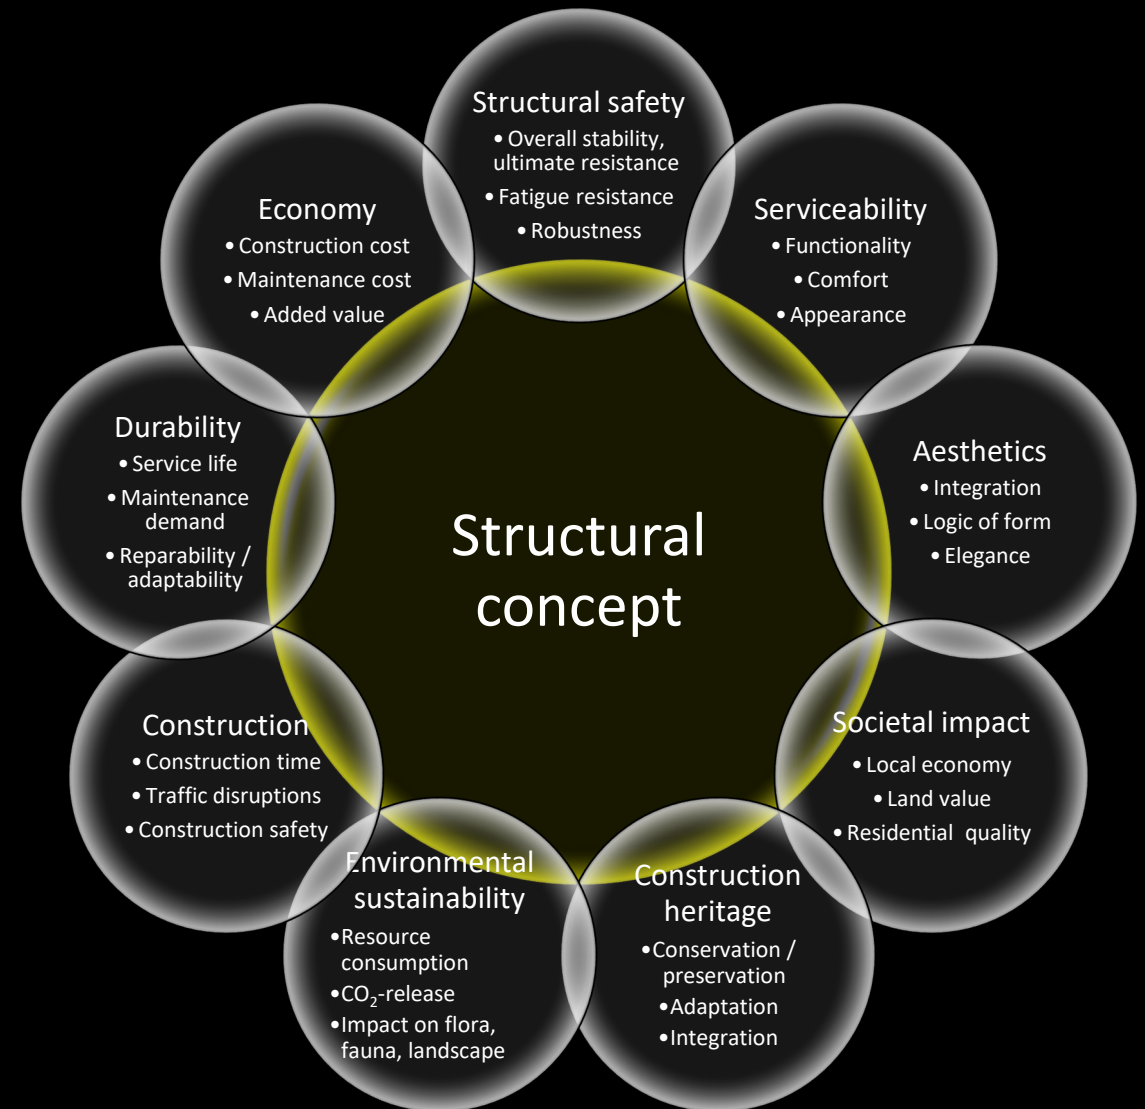

# Design Criteria – Overview

- Designing a bridge means developing its **Structural Concept**, based on the given boundary conditions.
- Designing a bridge is a **multi-faceted task**, where many different topics are to be **mastered by structural engineers**, as illustrated schematically in the figure by colour:
  - ... “classical” structural engineering topics
  - ... topics closely related to structural engineering
  - ... topics beyond classic education of structural engineers
- Bridge designers therefore need to have **broad interests**, and at least a **sufficient knowledge in all relevant fields** to be able to **communicate with experts**.


(these design criteria are discussed in the following, except for societal impact which is left out due to limited time).






# Design Criteria – Overview

- Designing a bridge means developing its **Structural Concept**, based on the given boundary conditions
- Designing a bridge is a **multi-faceted task**, where many different topics are to be **mastered by structural engineers**
  - ... “classical” structural engineering topics
  - ... topics closely related to structural engineering
  - ... topics beyond classic education of structural engineers
- **These criteria are not independent, and many of them are conflicting, or even contradictory**
  - **Rather than maximising individual criteria, an overall optimum solution is sought**

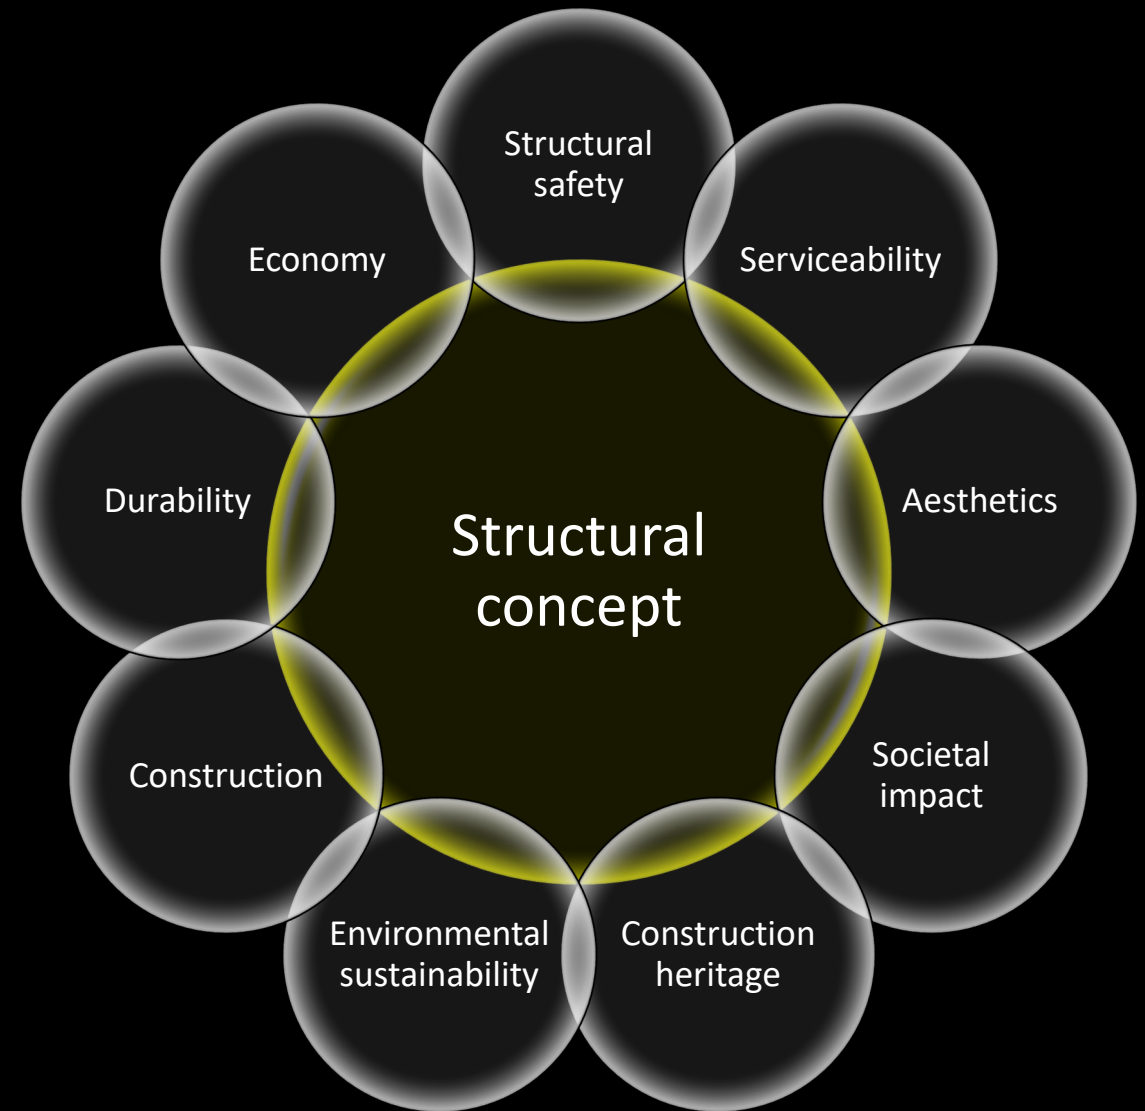

# Design Criteria – Overview

- Designing a bridge means developing its **Structural Concept**, based on the given boundary conditions
- Designing a bridge is a **multi-faceted task**, where many different topics are to be mastered
  - ... “classical” structural engineering topics
  - ... topics closely related to structural engineering
  - ... topics beyond classic education of structural engineers
- These criteria are not independent, and many of them are conflicting, or even contradictory
  - Rather than maximising individual criteria, an overall optimum solution is sought
  - Most bridges are designed today in **interdisciplinary design teams**, covering the expertise relevant for a specific project, **led by a structural engineer competent in all relevant topics** (but supported by experts where required)

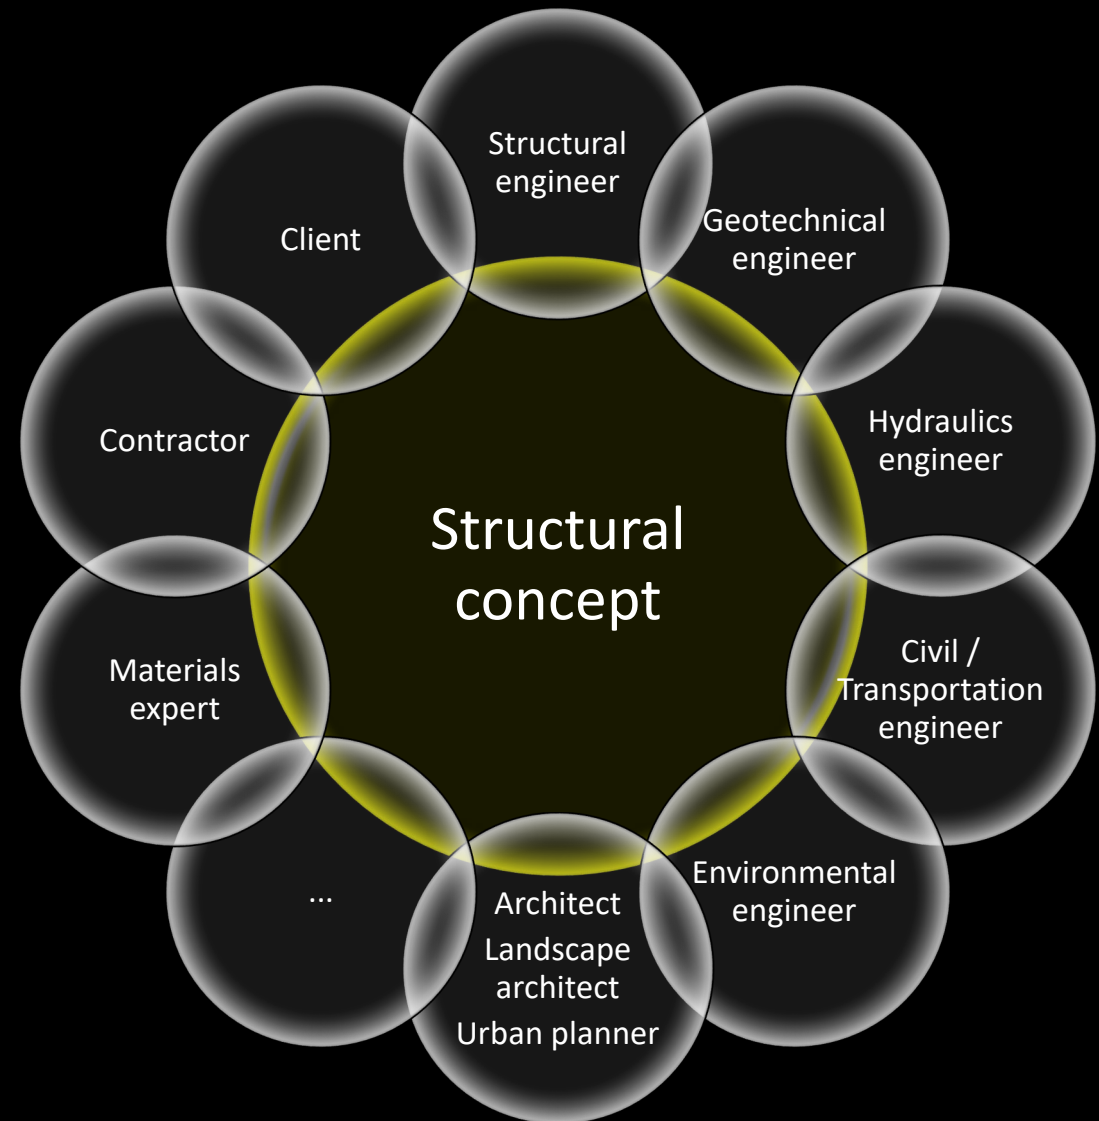

# Design Criteria – Overview

- The design criteria depend to some degree on the specific project, in particular

... the type and use of the bridge


... the location of the bridge

... the client's preferences

... the designer's preferences

- If the bridge site and use are given, and the client is known, there remains much less variation in the design criteria

Note: The graphs to the right on this slide and the following are merely schematic

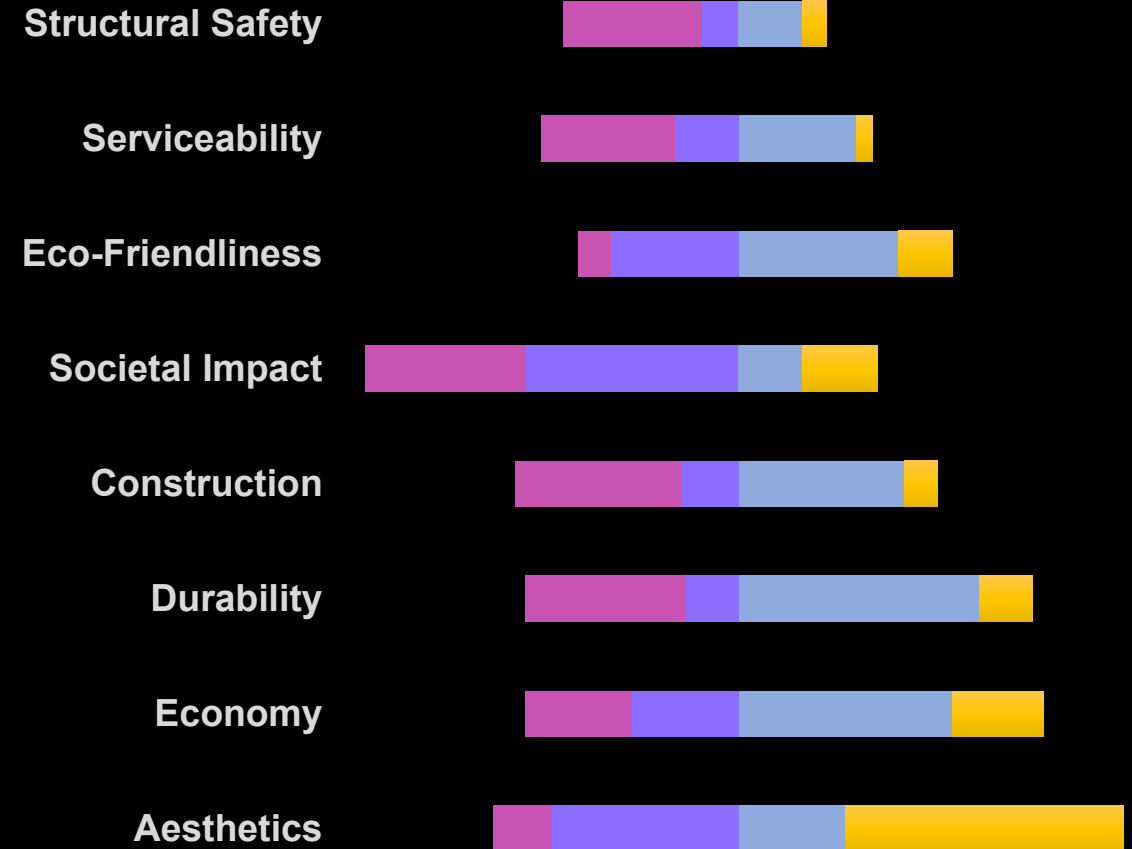


■ site-specific ■ use-/type-specific ■ client-specific ■ designer-specific

# Design Criteria – Overview

- Most design criteria are project-specific, depending on
  - ... the type and use of the bridge
  - ... the location of the bridge
  - ... the client's preferences
  - ... the designer's preferences
- The project-specific design criteria should be agreed upon by the owner/client and the design engineers:
  - general aims for the use of the bridge
  - ambient conditions and third-party requirements
  - operational and maintenance requirements
  - special requirements of the owner
  - objectives of protection and special risks

In Switzerland, these criteria are documented in the **Service Criteria Agreement (Nutzungsvereinbarung)**, which is signed by owner and designer


Note: The graphs to the right on this slide and the following are merely schematic

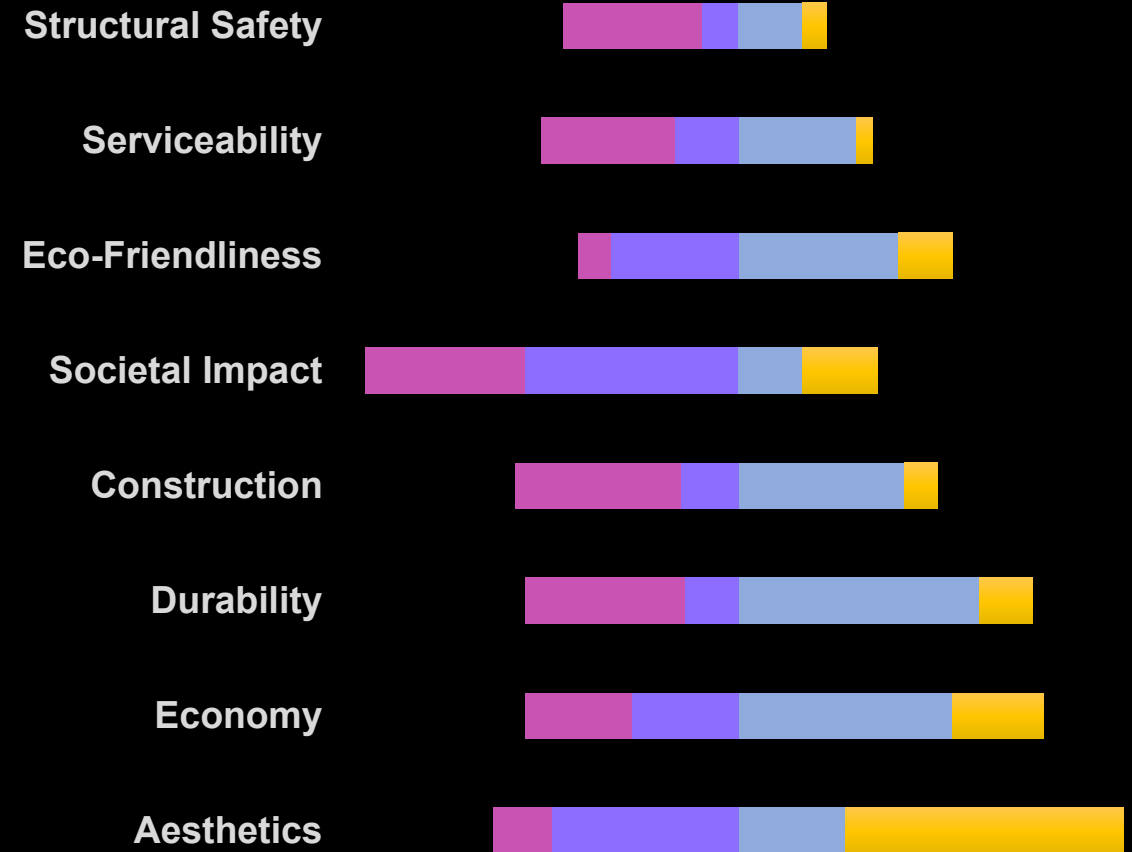

■ site-specific ■ use-/type-specific ■ client-specific ■ designer-specific

# Design Criteria – Overview

- Many design criteria are based on strict requirements, such as guidelines imposed by the client, design codes, or even legal constraints
- Some design criteria are less restrictive and subjective, leaving room for the designer's creativity
- Many design criteria are subjective, and neither an overall design goal nor the relative importance of the individual criteria to achieve this goal can usually be objectively quantified
  - No single “optimum” solution exists
  - Finding a good solution is demanding
  - Formalised decision making methods (weighted scoring method / “Nutzwertanalysen”) are of limited use here, and may even be completely misleading

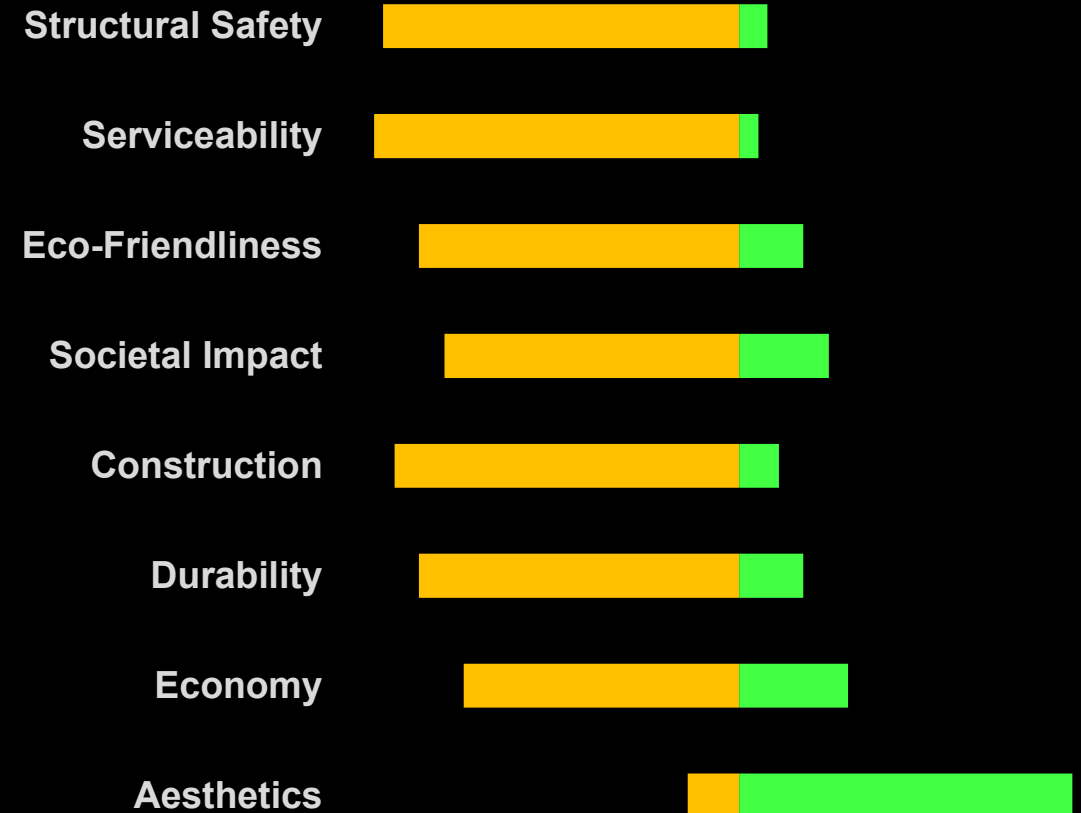


■ strict requirement (client-specific guideline, design code, law)  
■ possible variation (freedom of designer)

# Conceptual Design

**Design Criteria – Aesthetics**  
Entwurfskriterien – Gestaltung

# Design Criteria – Aesthetics

- Among all Design criteria, **aesthetic quality** is the most **difficult one to measure**
  - Aesthetic quality is **inherently subjective** (individual perception, **biased** by the observer's socio-cultural background, education and personal preferences / taste)
  - Aesthetic quality is hardly ever achieved by embellishment or ornamentation of an otherwise unsatisfactory design
- Designing bridges of high aesthetic quality **can hardly be taught** in lectures
- The course can merely ... insist on the **high relevance of aesthetic quality** and ... **emphasise the responsibility** of structural engineers for the built environment ... **foster the awareness** for aesthetics (open the eyes)
- Aesthetics will be treated as “**embedded topic**” throughout the lecture (here, only some basic aspects are discussed)

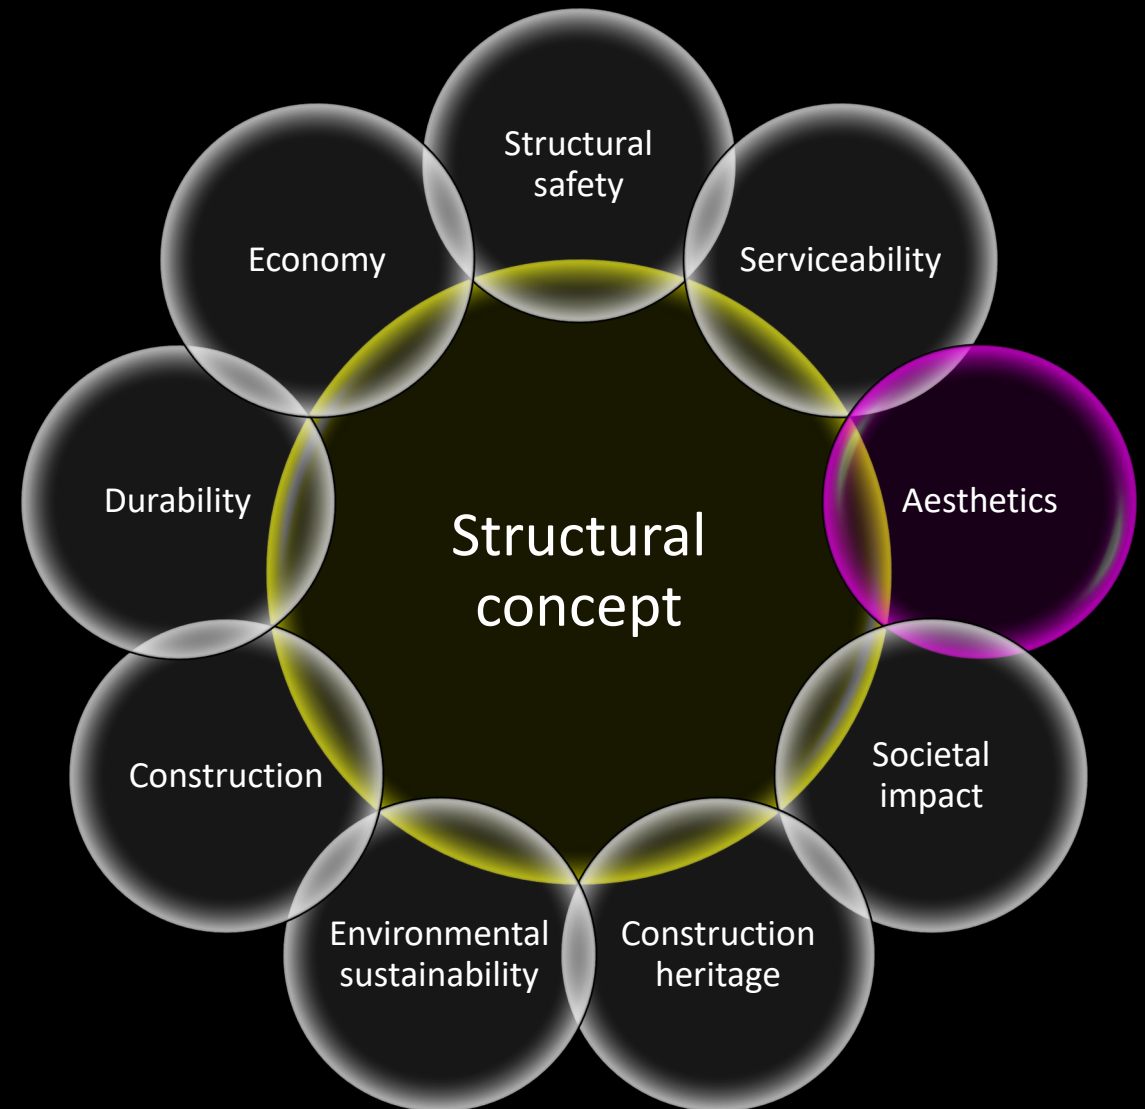

# Design Criteria – Aesthetics

- Bridges are prominent elements of public infrastructure
  - Bridges are designed for a long lifespan (centuries)
  - Bridges have a high impact on the quality of the built environment
  - Bridges are perceived by many people, whether the designer cares about aesthetic quality or not
- The aesthetic quality of bridges is highly relevant





# Design Criteria – **Aesthetics**

- Bridge designers are **responsible for the aesthetic quality** of their bridges, as much as for structural safety and serviceability
  - Bridges often have the potential to **greatly increase the quality of exterior spaces** if the opportunities are seized
- **Responsible bridge designers care about the quality of the built environment**



# Design Criteria – Aesthetics

Even though aesthetic quality is inherently subjective, there are some generally accepted principles to achieve an aesthetically satisfactory design:

- *Eduardo Torroja* postulated the “**logic of form**” (“Razón y ser de los tipos estructurales”), which is closely related to L. Sullivan’s maxim *form follows function* dating back to 1896
- *David Billington* suggested that an efficient bridge is not only economical, but also elegant: His axiom was “**efficiency – economy – elegance**”
- *Juan José Arenas* insisted in the importance of **ethics, rather than economy** (which is related, see next slide)
- *Fritz Leonhardt* established an entire set of aesthetic design principles
- Many authors postulated similar principles (e.g. *A.C. Liebenberg*, *Ch. Menn*, *M. Virlogeux*, ...), whose common denominator can be summarised as:
  - **Integration (in landscape, urban context, ...)**
  - **Logic of form**
  - **Elegance (form, proportion, order, ...)**




# Design Criteria – Aesthetics

- High aesthetic quality usually causes some extra cost
- This extra cost may be high if an aesthetically bad design is “embellished” or “ornamented”, and disproportionate if an arbitrarily extravagant design is “engineered” a posteriori, or unnecessarily long spans and/or complicated typologies are used for the sake of breaking world records

**Aesthetic quality often remains unsatisfactory in such cases**, particularly if the form lacks logic – and designing such bridges is ethically questionable, at least if the bridges are paid for by taxpayers

- On the contrary, high aesthetic quality is achieved at very little extra cost by a **holistic design approach**:
  - consider aesthetics integrally in the design process, together with technical criteria
  - in particular, account for the construction process when designing long-span bridges

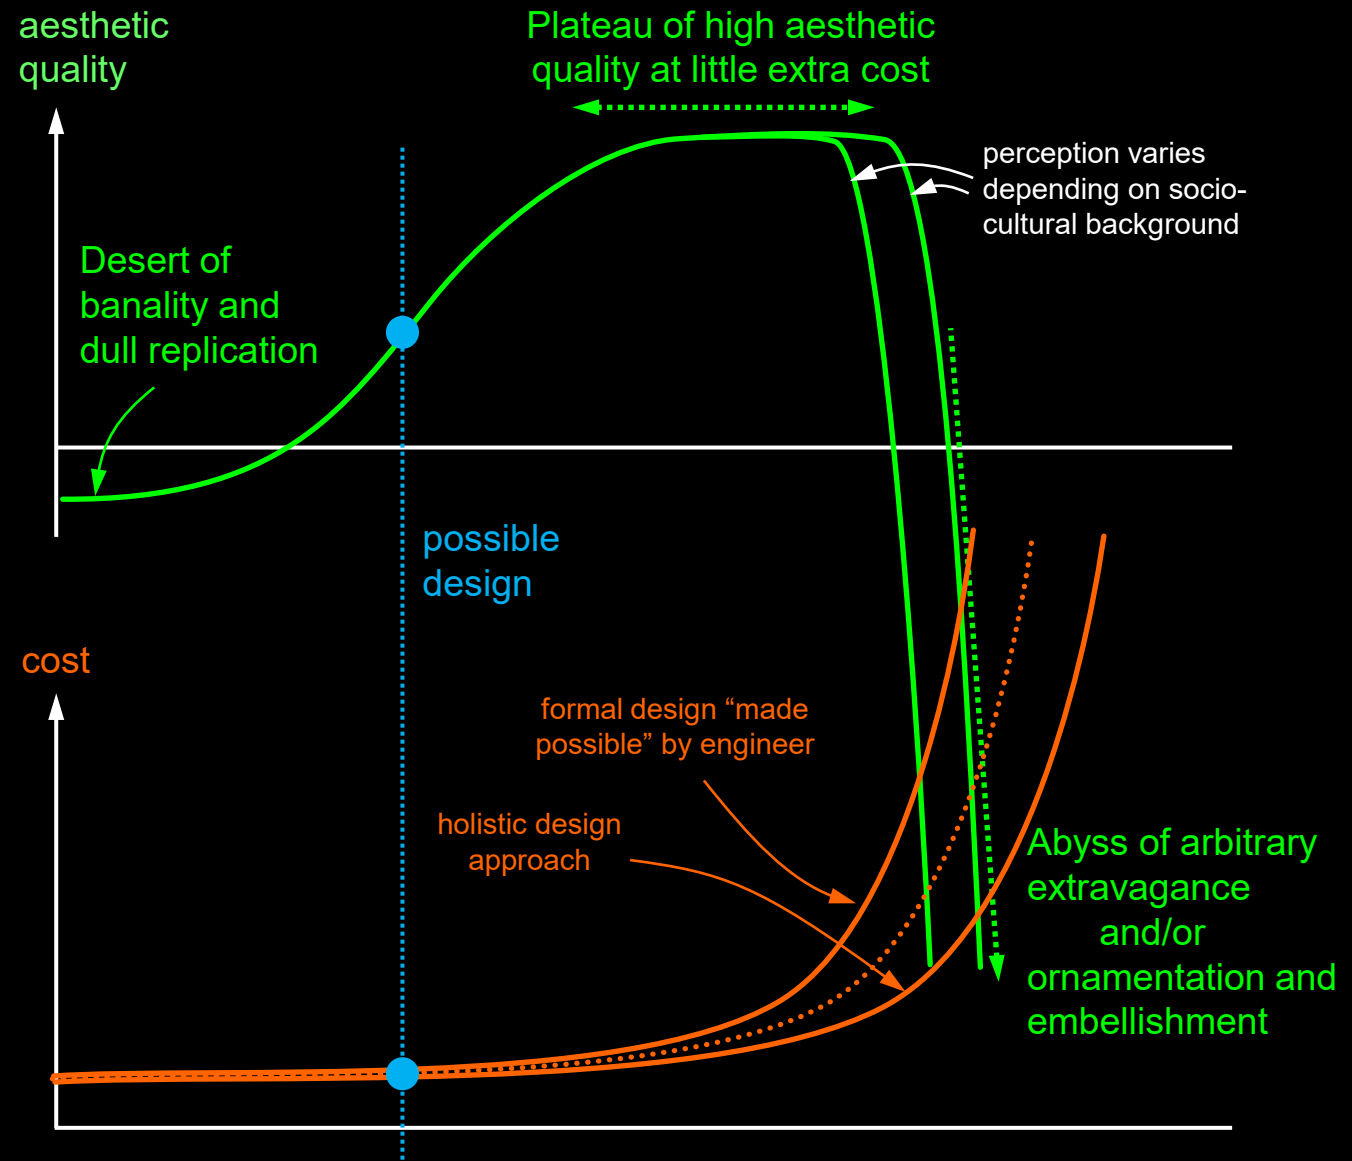

# Design Criteria – **Aesthetics**



# Design Criteria – **Aesthetics**



# Design Criteria – **Aesthetics**



# Design Criteria – **Aesthetics**




# Design Criteria – **Aesthetics**





# Design Criteria – **Aesthetics**

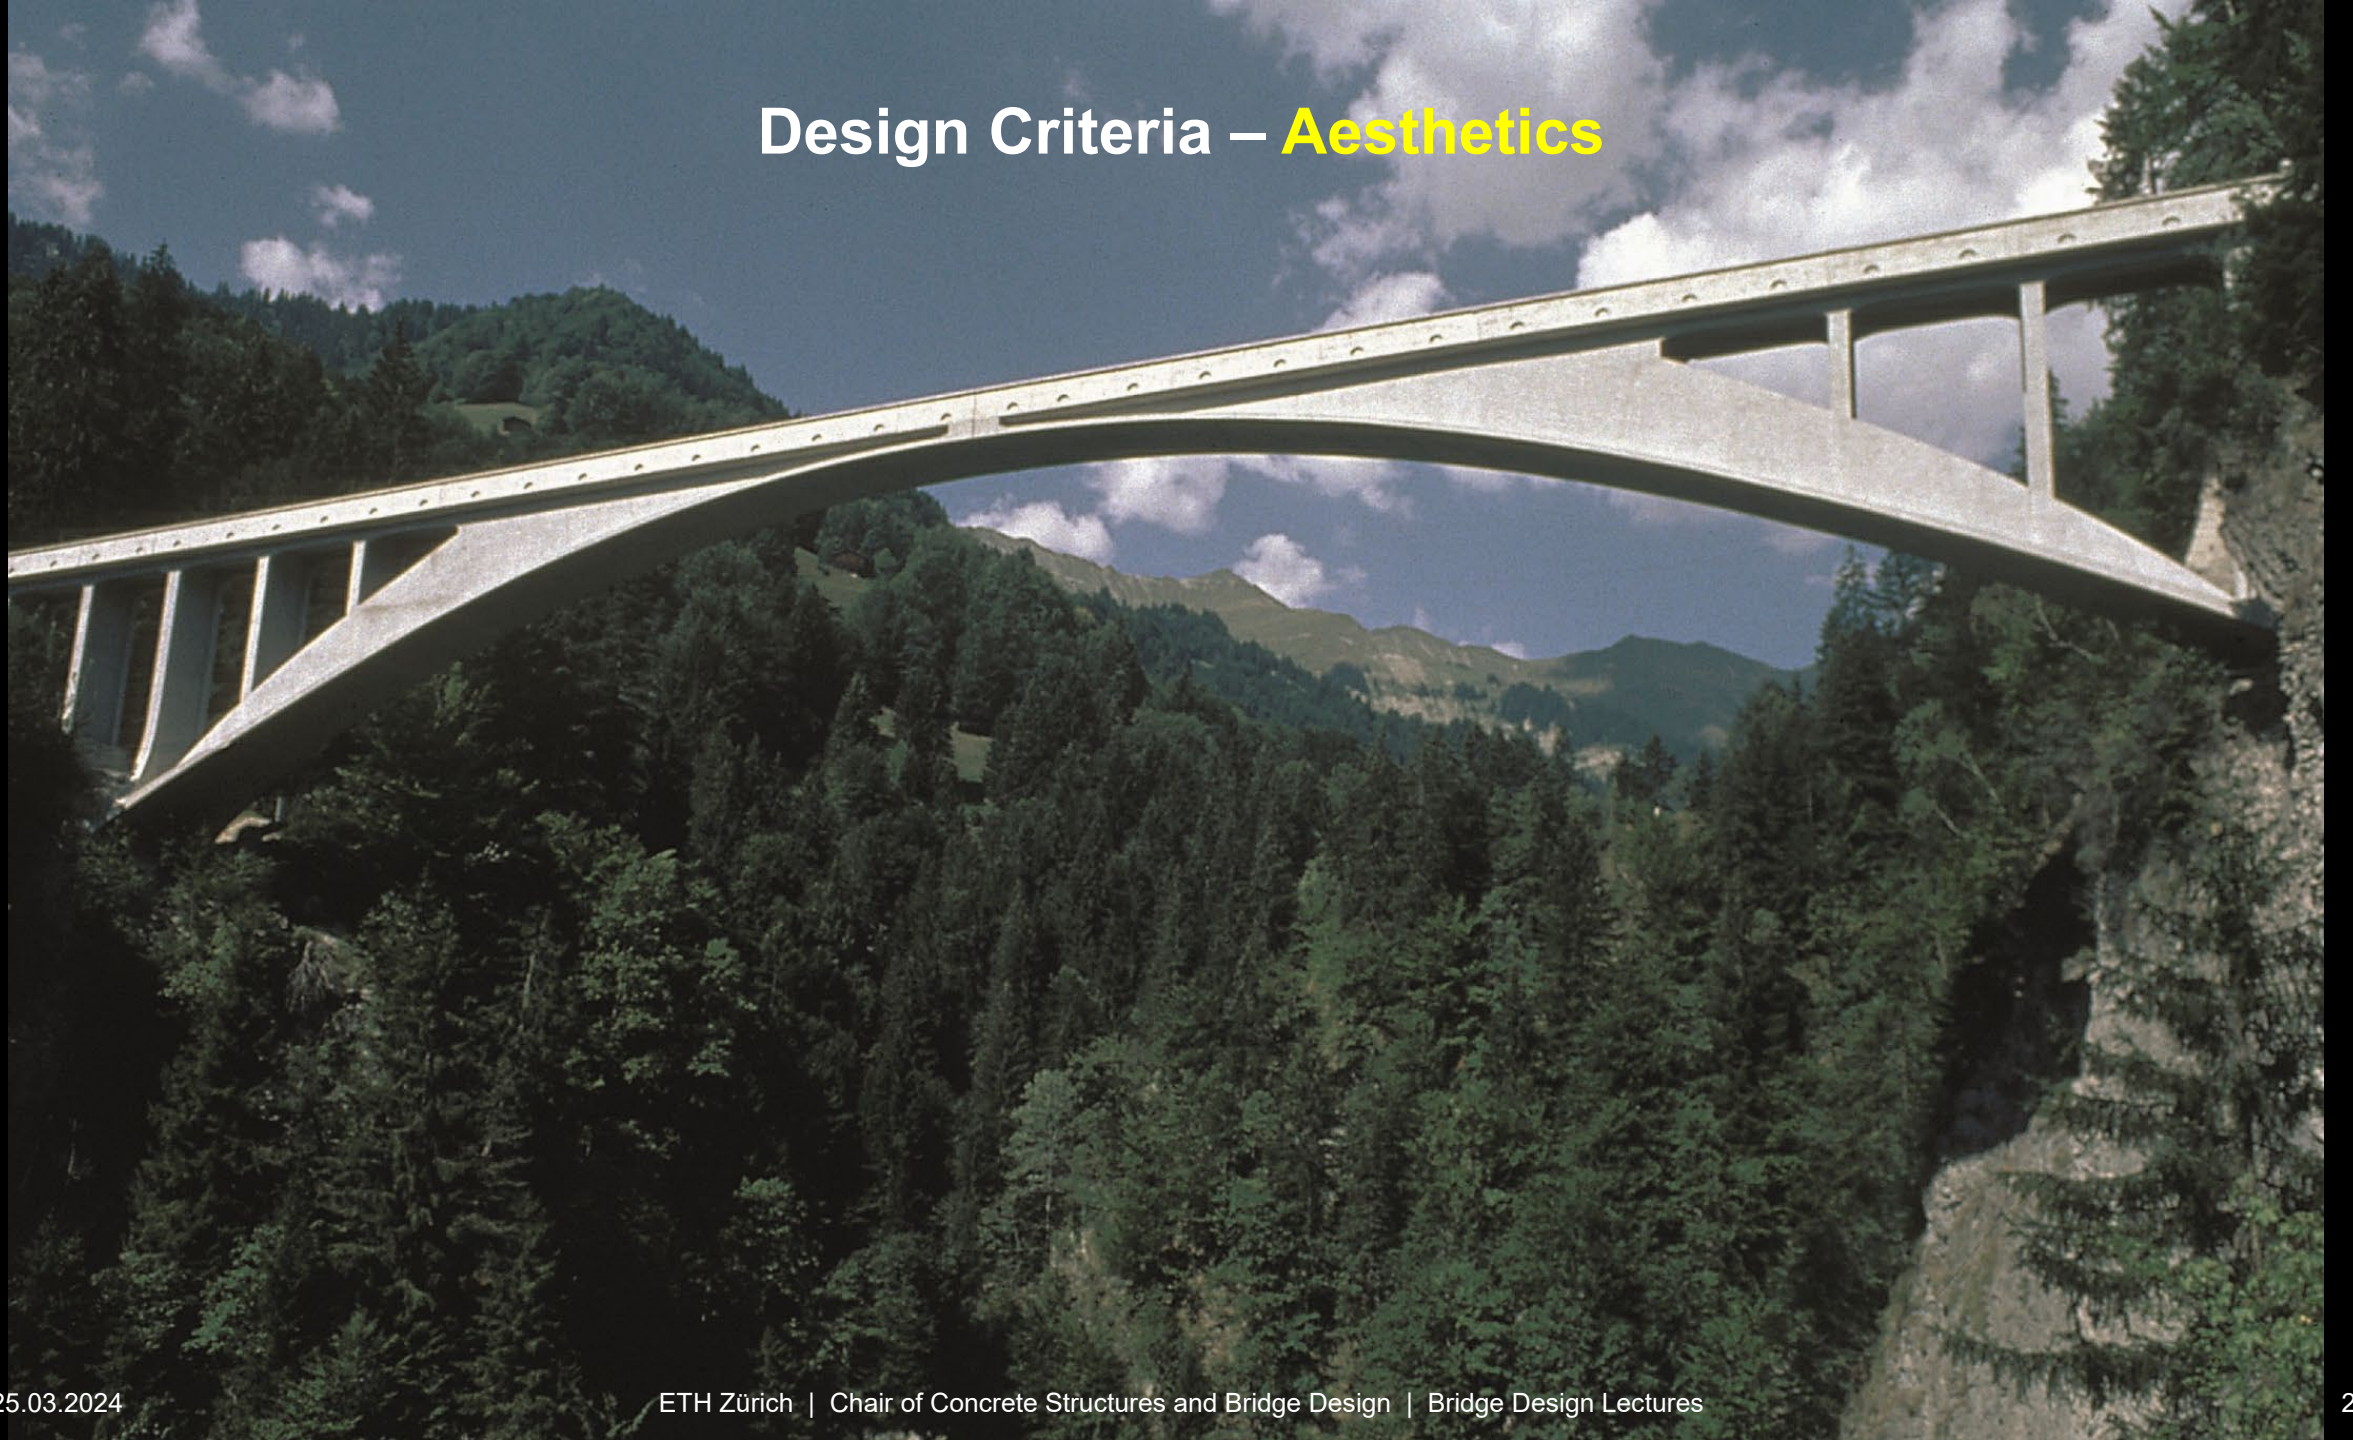


# Conceptual Design

Design Criteria – Construction heritage

Entwurfskriterien – Konstruktionserbe / Denkmalpflege

# Design Criteria – Construction heritage

- Another design criterion which is difficult to quantify is **construction heritage**. All bridges become part of it once built. However, only few will ever be **worthy of protection**.
- The design criterion **construction heritage** thus refers to situations where:
  - an **existing bridge worthy of protection** needs to be **replaced or adapted**, e.g. due to a required widening
  - a **new bridge** is built **near a protected monument**
- Typically, governmental **commissions for monument preservation** decide if a bridge is worthy of protection
  - due to their visible value and **character as monument**
  - as **milestones of technological development** (e.g. first prestressed bridges). This **intangible construction heritage** is not (yet) protected in CH
- Any interventions affecting protected bridges need to be **coordinated with the responsible bodies**.
- Even if a historic bridge is not protected, **preserving it entirely or partly** should be considered as an option in developing the structural concept.

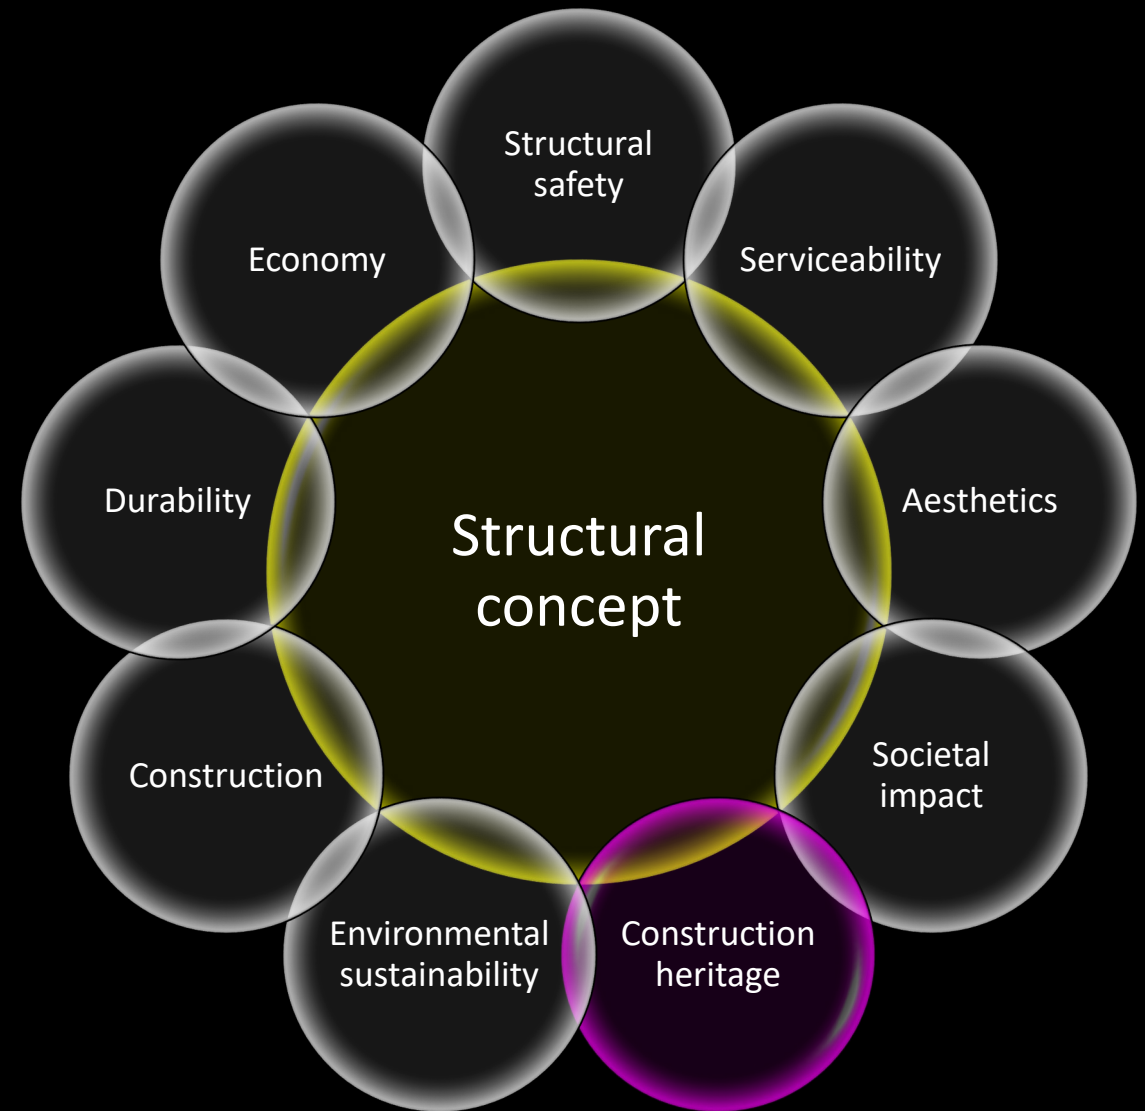

# Design Criteria – Construction heritage

- While interventions affecting construction heritage are **highly site-specific** and need to be coordinated with the responsible bodies, the following guidelines apply:
  - **preserve** protected bridges e.g. by considering
    - ... **alternative locations** for a new bridge
    - ... **alternative uses** of the protected bridge (e.g. use as footbridge with reduced traffic loads)
  - **minimise interventions** in protected bridges, preserving **as much as possible** of the original structure
  - **do not mimic historic construction** when replacing or complementing a protected bridge (reconstructions may be viable in exceptional cases, see next slide)
  - **minimise impact of new structure on protected one** (avoid spectacular designs, see next slide)
  - develop a structural concept **respecting** and, if possible, **reflecting the construction heritage** (e.g. by adopting the span layout, see photo on this slide or referencing the protected structure – including intangible values – in modern design, see next slide)



# Design Criteria – Construction heritage



Good example:  
BLS railway  
Viaduct over  
Saane river near  
Mauss/  
Gümmenen  
(2021):

The new double  
track main span  
references the  
historic bolted  
single track  
Brown truss  
from 1901 with  
an innovative  
modern truss  
girder (Brown  
truss informed  
by shear forces).

The stone  
masonry  
viaducts (>400  
m length) were  
adapted to  
accommodate  
the new double  
track line with  
minimum  
interventions.

Appropriate  
exception to  
the rule of not  
imitating:  
Mostar Bridge  
(Stari Most),  
reconstructed  
in 2004 after it  
had been  
destroyed in  
the Croat-  
Bosniak War



The Lusitania  
Bridge (1991),  
a spectacular  
design with  
uselessly long  
span, impairs  
one of the  
world's most  
important  
preserved  
Roman  
Bridges in  
Mérida (60  
arches, over  
700 m length)




# Conceptual Design

Design Criteria – Structural Safety and Serviceability

Entwurfskriterien – Tragsicherheit und Gebrauchstauglichkeit

# Design Criteria – Structural Safety and Serviceability

- **Structural safety** and **serviceability** have many points in common (loads, limit state design, etc.)  
→ treated in same chapter of this the lecture
- The objectives of **structural safety** and **serviceability** are of **paramount importance**  
→ specified in detail in design codes
- **The project-specific service criteria** should be agreed upon by the owner/client and the design engineers  
(→ **Service Criteria Agreement / Nutzungsvereinbarung, see overview**)
- The basic **structural concept**, i.e. the  
... **structural system**  
... relevant **dimensions, material properties and details**  
... **methods of construction**  
is developed based on these service criteria

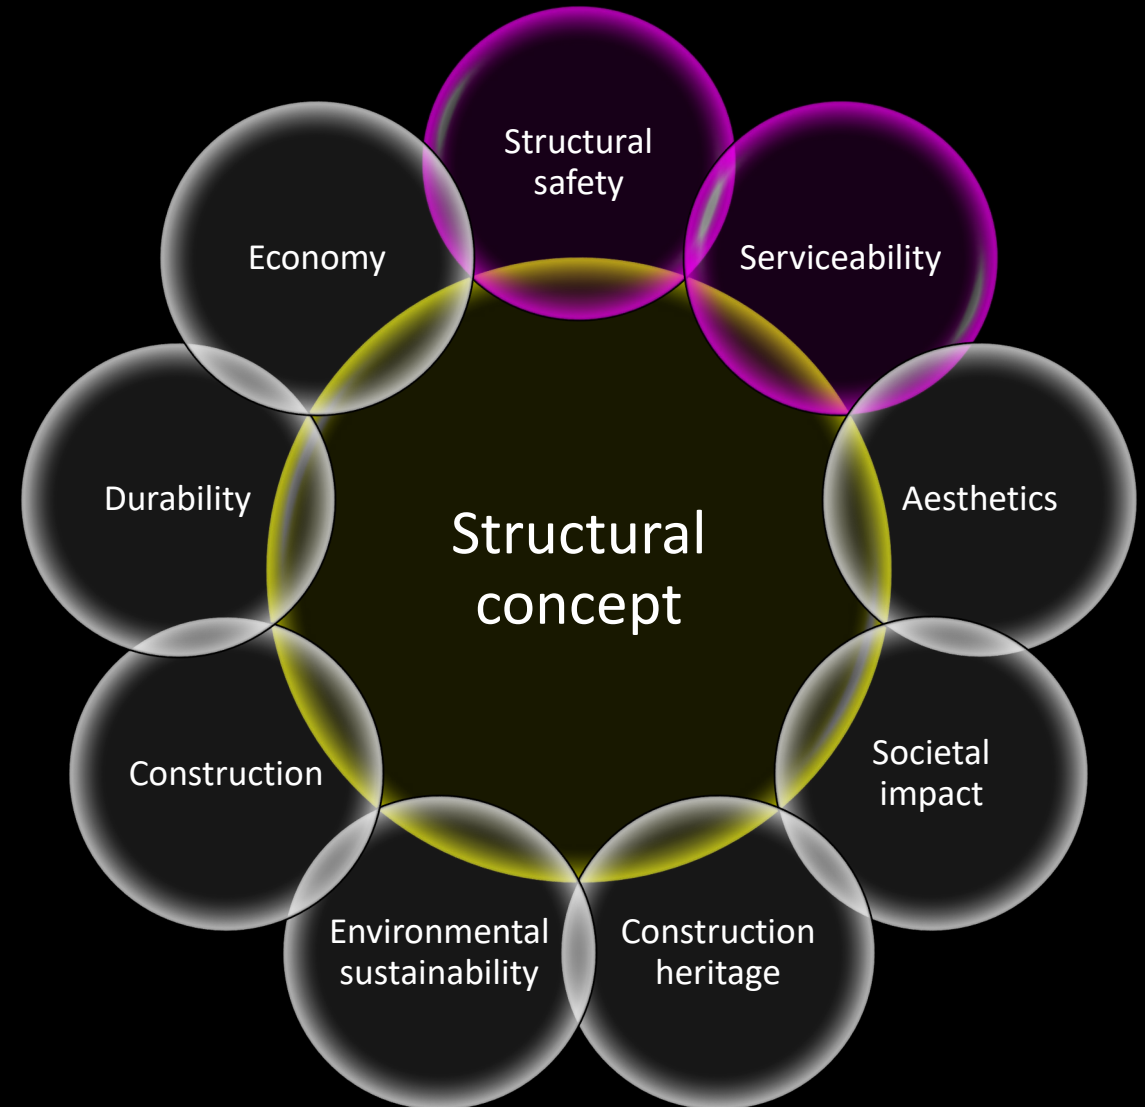


# Design Criteria – Structural Safety and Serviceability

- Depending on the concept chosen, specific requirements for the **detailed design (dimensioning), execution, use and preservation** are obtained:

- hazard scenarios (Gefährdungsbilder) considered
- requirements of structural safety, serviceability and durability and measures needed to guarantee them
- ground conditions
- important assumptions in the structural models
- accepted risks
- other conditions relevant to the design

In Switzerland, these **requirements** are documented in the **Basis of Design (Projektbasis)**, which is usually updated during the detailed design

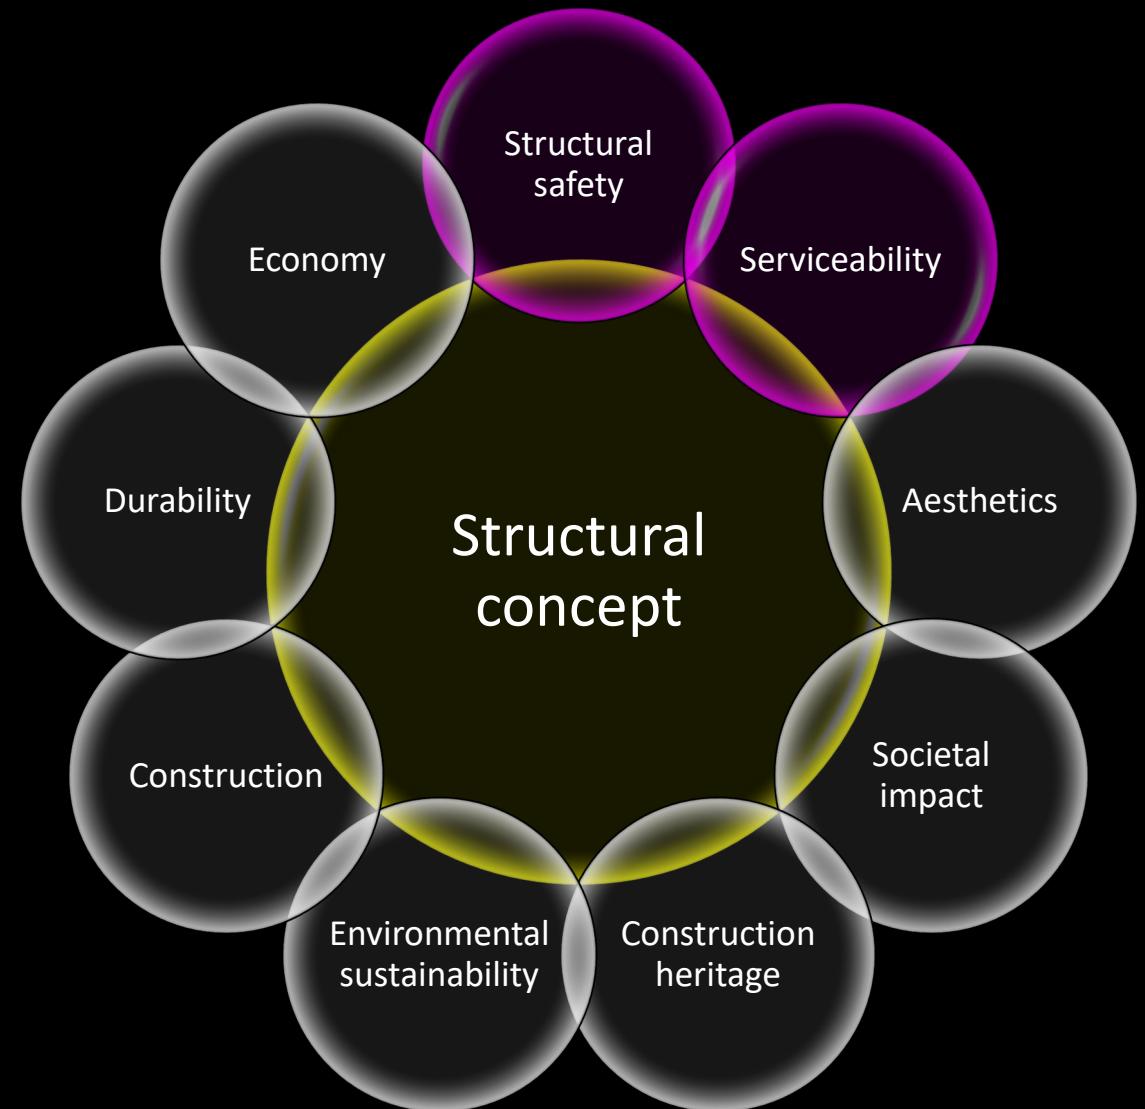



# Conceptual Design


Design Criteria – Structural Safety and Serviceability

Limit State Design

Bemessung nach Grenzzuständen

# Design Criteria – Structural Safety and Serviceability: Limit State Design

- Most modern design codes follow the **Limit States** approach, aka **Load and Resistance Factor Design (LRFD)**
- This approach is illustrated on the right for **structural safety** (often referred to as ultimate limits state = “ULS”), but also applicable to **serviceability** design (serviceability limit state = “SLS”)
- Some codes still allow the use of **Allowable Stress Design**
- **Students are assumed to be familiar with the concept of LRFD** and its application to
  - ... the design of the basic construction materials (concrete, steel, timber)
  - ... and their interaction with soil (foundations, retaining structures)
- Thus, the lecture focuses on **bridge-specific aspects** of the design process

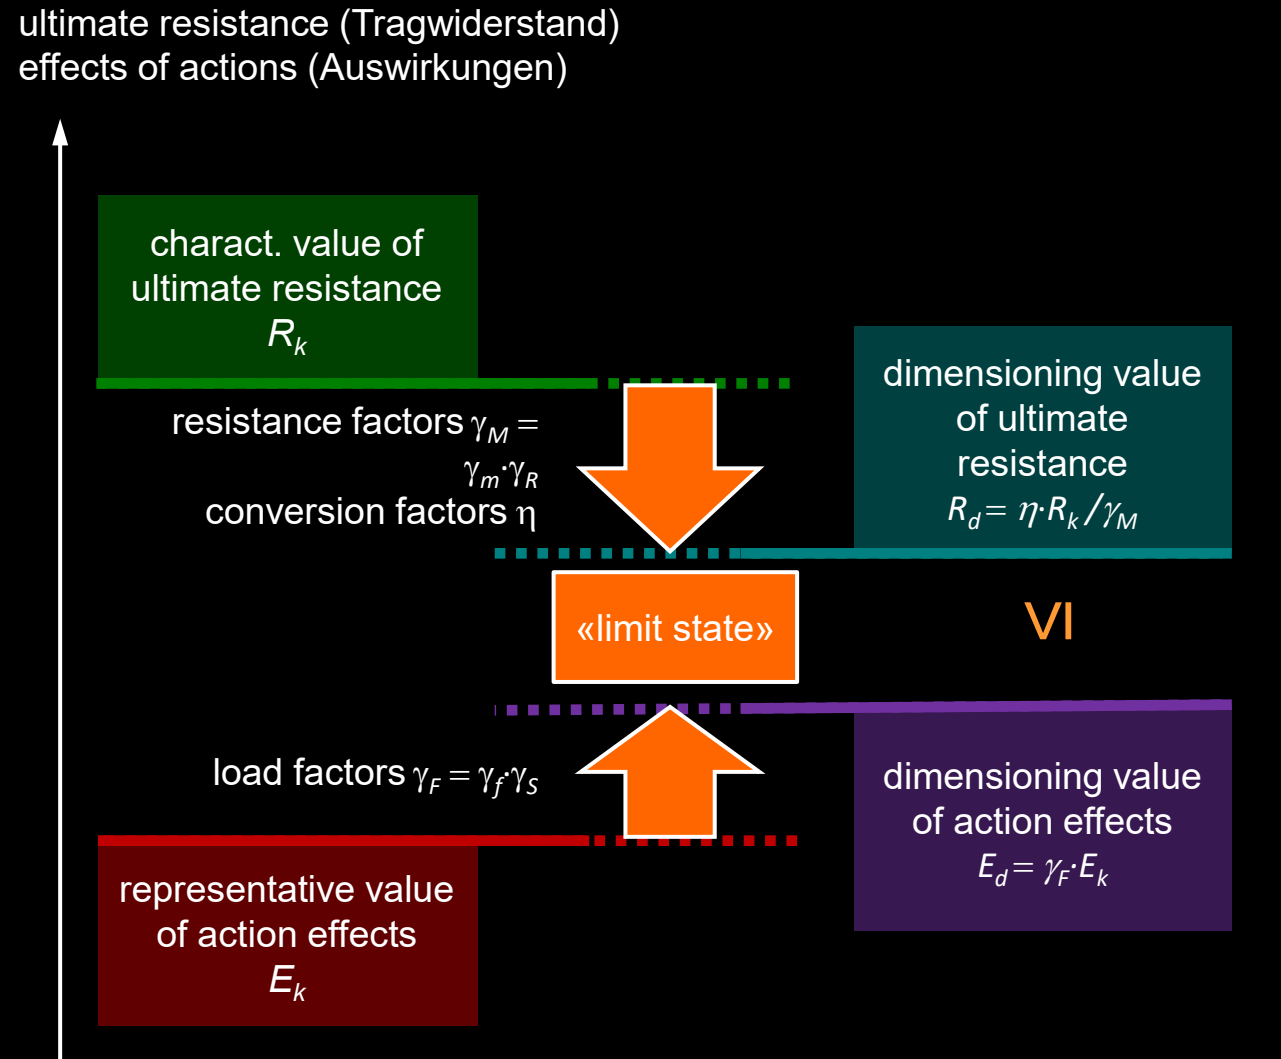

# Design Criteria – Structural Safety and Serviceability: Limit State Design

Bridge Design Codes/Standards used around the world include publications by:

## Europe





- SIA (Swiss Society of Engineers and Architects)
- EN (European Standards)
- SETRA (service d'études techniques des routes et autoroutes)

## North America

- AASHTO (American Association of State Highway and Transportation Officials)
- AREMA (American Railway Engineering and Maintenance-of-Way Association)
- CSA (Canadian Standards Association)

## Asia

- China National Standards (GB)
- Japanese Association of Highways

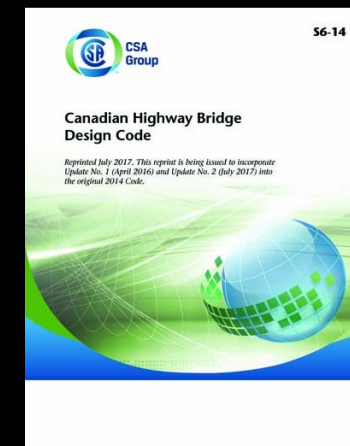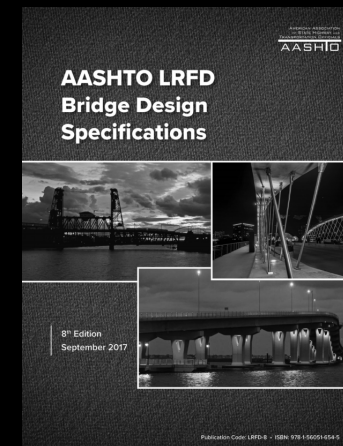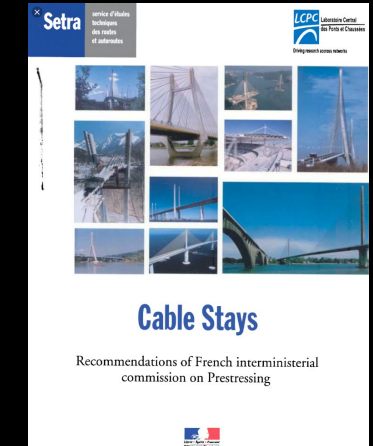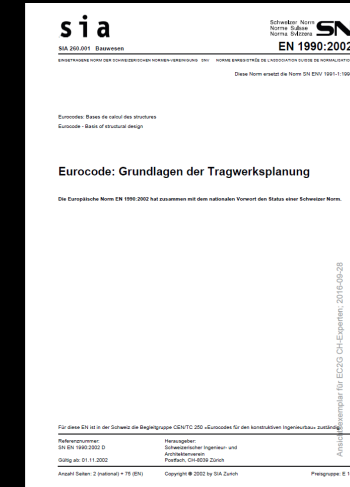

# Design Criteria – Structural Safety and Serviceability: Limit State Design

SIA 260 defines the following **Limit States**:

## **Ultimate** Limit States “ULS”

- Concern **safety** of structure and persons
- Involve:
  - **Overall stability** of structure
  - **Ultimate resistance** of structure or one of its structural members (incl. supports & foundations)
  - **Fatigue resistance** of structure or one of its structural members
- Consider:
  - **Permanent** actions
  - **Variable** actions
  - **Accidental** actions

Always consider: **construction** phases, **operation** phase, future **maintenance** needs



# Design Criteria – Structural Safety and Serviceability: Limit State Design

SIA 260 defines the following **Limit States**:

## **Serviceability** Limit States “SLS”

- Concern **functionality & appearance** of structure, user **comfort**
- Criteria applied to:
  - **Deformations** (functionality, appearance, deterioration)
  - **Vibrations** (functionality, comfort)
  - **Defective sealing** (functionality, durability)
  - **Cracking/Connection slipping** (appearance, durability)
  - **Effects on stream flow** (environmental impacts)



# Conceptual Design

Design Criteria – Structural Safety and Serviceability

Actions

Einwirkungen

# Design Criteria – Structural Safety and Serviceability: Actions

Depending on the project, the following **types of actions** have to be considered:

## Permanent Actions

- **Dead loads: self-weight of the structure** (Eigenlast)
- **Superimposed dead loads: self-weight of non-structural components** (Auflast) (attachments, utilities)
- **Creep and Shrinkage**
- **Prestress forces** including secondary effects
- Locked-in forces resulting from the construction process

## Actions imposed by the ground (permanent or transient)

- Earth pressures, downdrag forces
- Soil surcharge
- Water pressure
- Stream flow pressure (see notes)

## Variable Actions

- Live Loads (Nutzlasten) – including:
  - **Vertical vehicular live load** (incl. dynamic allowance)
  - **Horizontal vehicular live load** (braking, centrifugal and nosing = Schlingerkraft)
  - **Vertical and horizontal pedestrian live load**
- Friction loads at sliding surfaces (e.g. bearings)
- Wind Loads – on structure and on live load
- Temperature effects – uniform and gradient
- Snow load (see notes)

## Accidental (Extreme) loads

- Seismic (earthquake) loads
- Ship impact / Vehicular collision / Train derailment
- Avalanche load
- Ice load
- Blast loading

# Design Criteria – **Structural Safety and Serviceability: Actions**

## Live Loads

- The following slides illustrate the traffic load models and provisions of SIA 261 (which is similar to EN1991-2, see notes). Other codes have similar provisions.
- The live loads are introduced following the categories of SIA 261, i.e.
  - **non-motorised traffic** (→ footbridges, sidewalks)
  - **road traffic** (→ road bridges)
  - **rail traffic** (→ railway bridges)
- Project-specific criteria may need to be developed for live loads not explicitly covered, such as:
  - **special vehicles, military loads, tramway loads**
  - **bridges with combined road and rail traffic**
  - **bridges with spans longer than 200 m**



# Design Criteria – Structural Safety and Serviceability: Actions

## Live Loads – Non-motorised traffic

- Covered in SIA 261, Chapter 9
- Structures covered include:
  1. Pedestrian and cycle path bridges
  2. Bridges at train stations across rail lines
  3. Piers
  4. Walkways on road bridges
  5. Service gangways



# Design Criteria – Structural Safety and Serviceability: Actions

## Live Loads – Non-motorised traffic

- Two, independent, non-simultaneously acting load models are considered
- Load Model 1** (crowd of people)
  - Uniformly distributed load  $q_k = 4.0 \text{ kN/m}^2$
  - Placed in most unfavourable position
- Load Model 2** (*lightweight* maintenance vehicle)
  - Concentrated load  $Q_k = 10 \text{ kN}$
  - Acting in most unfavourable position, on quadratic / circular bearing area:



- Horizontal Load for footbridges:**
  - Acts in longitudinal axis of bridge at surfacing level (together with vertical live load)
  - $\text{Max. } \{ 10\% \sum q_k \text{ or } 60\% Q_k \}$



2.4 kN/m<sup>2</sup>  
(50 psf)



4.8 kN/m<sup>2</sup>  
(100 psf)





7.2 kN/m<sup>2</sup>  
(150 psf)

Maximum  
Credible Loading

# Design Criteria – Structural Safety and Serviceability: Actions

## Live Loads – Road traffic

- Covered in SIA 261, Chapter 10
- Only normal use by road traffic is covered
- Special vehicles not covered
- For  $L > 200$  m, special investigations may be warranted
- Traffic loads typically idealised as:
  1. Concentrated axle loads representing heavy vehicles (trucks / lorries)
  2. Uniformly distributed loads representing heavy traffic (trucks) on one lane and light vehicles (cars) and the remaining lanes

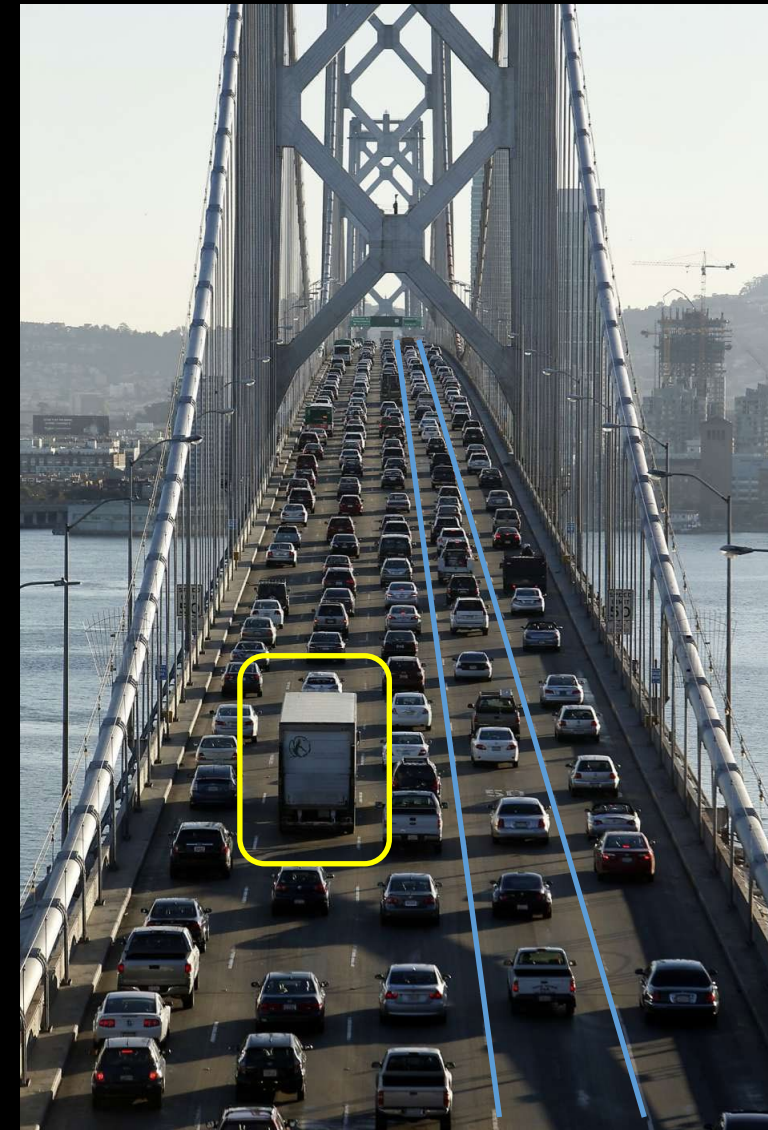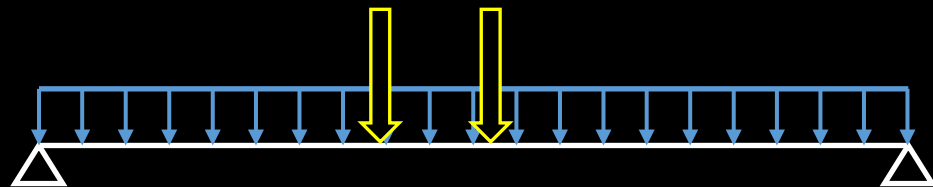


# Design Criteria – Structural Safety and Serviceability: Actions

## Live Loads – Road traffic

### Division of roadway:

1. Define roadway width,  $b$
2. Divide the roadway width into notional (fictitious) lanes according to table
3. Locate & number the notional lanes:
  - Depends on type of verification
  - Maximise effects of loading
  - Most unfavourable effect → Lane Number 1, second most unfavourable effect → Lane Number 2, etc.

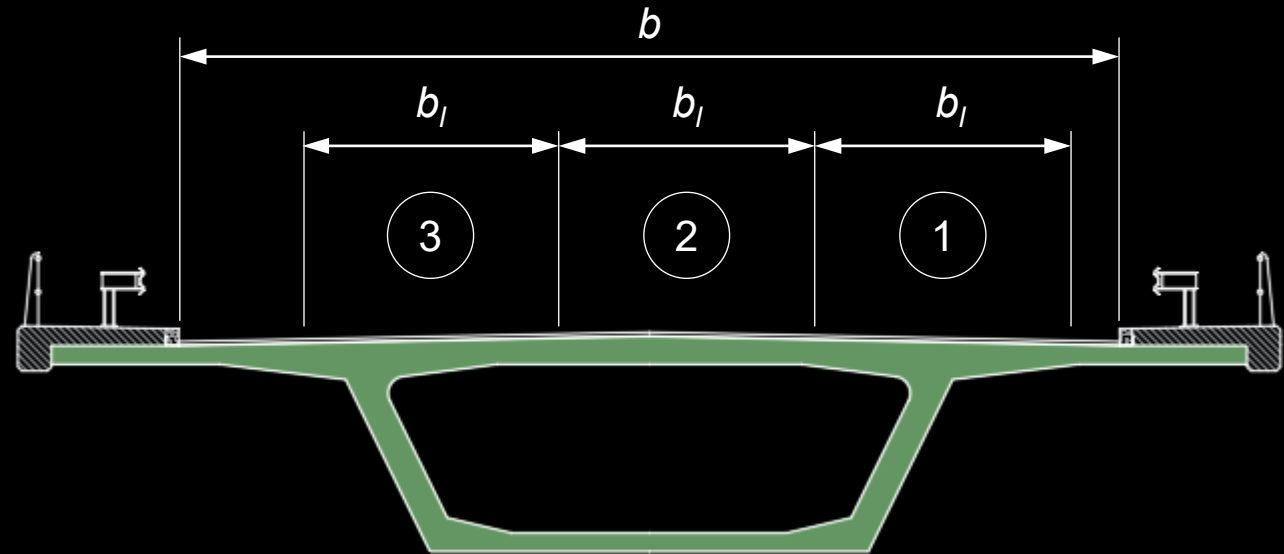

Roadway width $b$	Number of notional lanes	Width of a notional lane $b_l$	Width of the remaining area
$b < 5.4 \text{ m}$	$n_l = 1$	3 m	$b - 3 \text{ m}$
$5.4 \text{ m} \leq b < 6 \text{ m}$	$n_l = 2$	$b / 2$	0
$6 \text{ m} \leq b$	$n_l = \text{Int} [b / (3 \text{ m})]$	3 m	$b - (3 \text{ m}) \times n_l$

Note: **Influence lines** help identifying the governing load positions


# Design Criteria – Structural Safety and Serviceability: Actions

## Live Loads – Road traffic

### Division of roadway – Special Cases:

Separated roadways on **common** superstructure:

- If separation is **permanent**, each part of the roadway may be considered **separately** (for division into notional lanes), but numbering of notional lanes is continuous, i.e. there is **only one Lane Number 1**
- However, to account for future modifications, it is common to **ignore the median barrier** when defining notional lanes → conservative

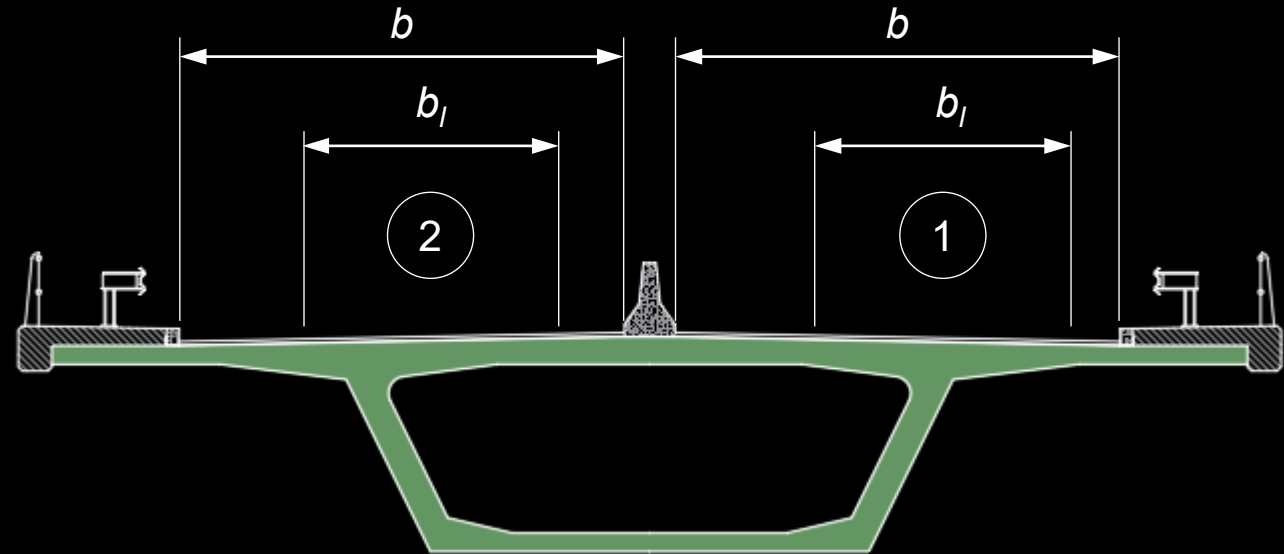

# Design Criteria – Structural Safety and Serviceability: Actions

## Live Loads – Road traffic


### Division of roadway – Special Cases:

Separated roadways on **independent** superstructures:


- Each superstructure is considered separately, i.e. lane numbering is **not** continuous (**two lanes Number 1**).

- If substructure is **common** for both superstructures, numbering of notional lanes is continuous, i.e. there is **only one Lane Number 1** for the design of the substructure elements.

Notional lanes for superstructure design:

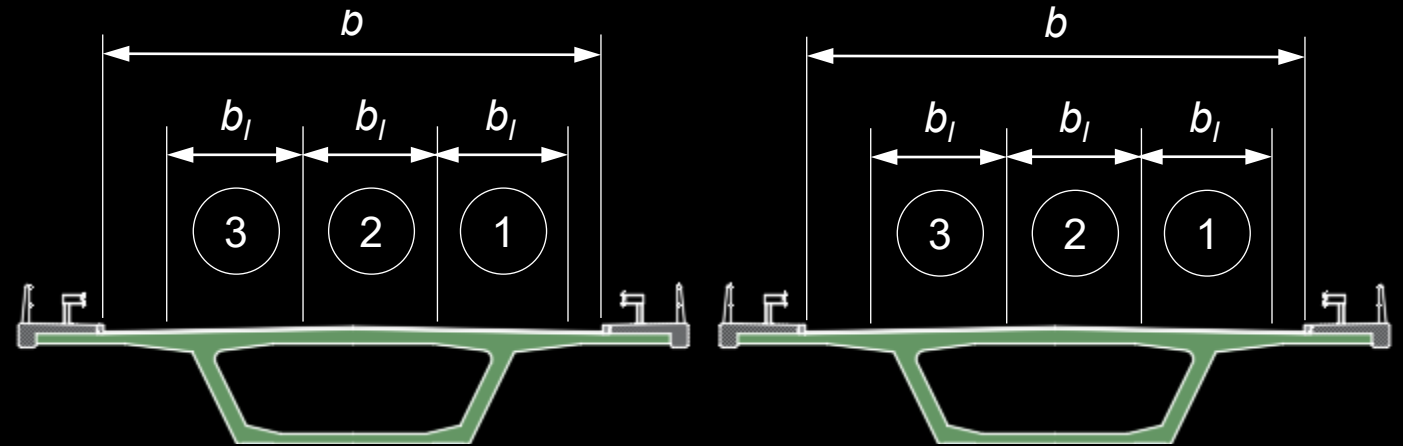

Notional lanes for substructure design:

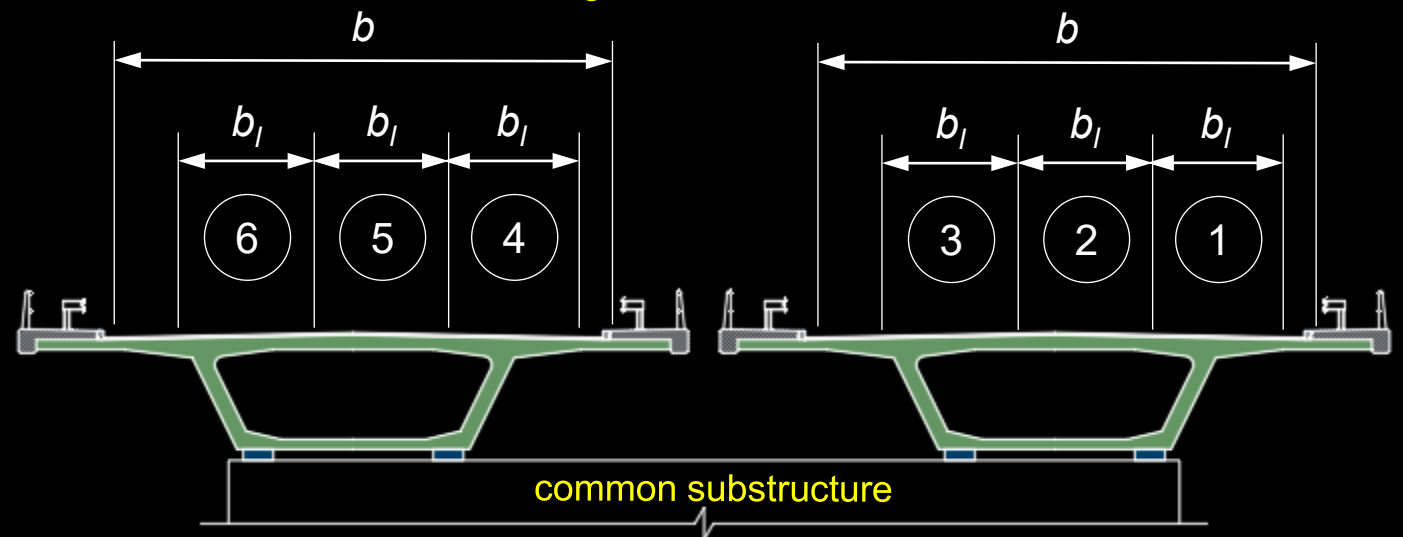

# Design Criteria – Structural Safety and Serviceability: Actions

## Live Loads – Road traffic

### Application of Traffic Loads:

### Load Model 1 (LM1):

- Axle Loads**

Lane 1:  $Q_{k1} = 300 \text{ kN}$

Lane 2:  $Q_{k2} = 200 \text{ kN}$

- Uniformly distributed load**

Lane 1:  $q_{k1} = 9.0 \text{ kN/m}^2$


Elsewhere:  $q_k = 2.5 \text{ kN/m}^2$

(including remaining areas)

- $\alpha$  factors:

Account for composition & density of traffic

Normally:  $\alpha_Q = \alpha_q = 0.9$

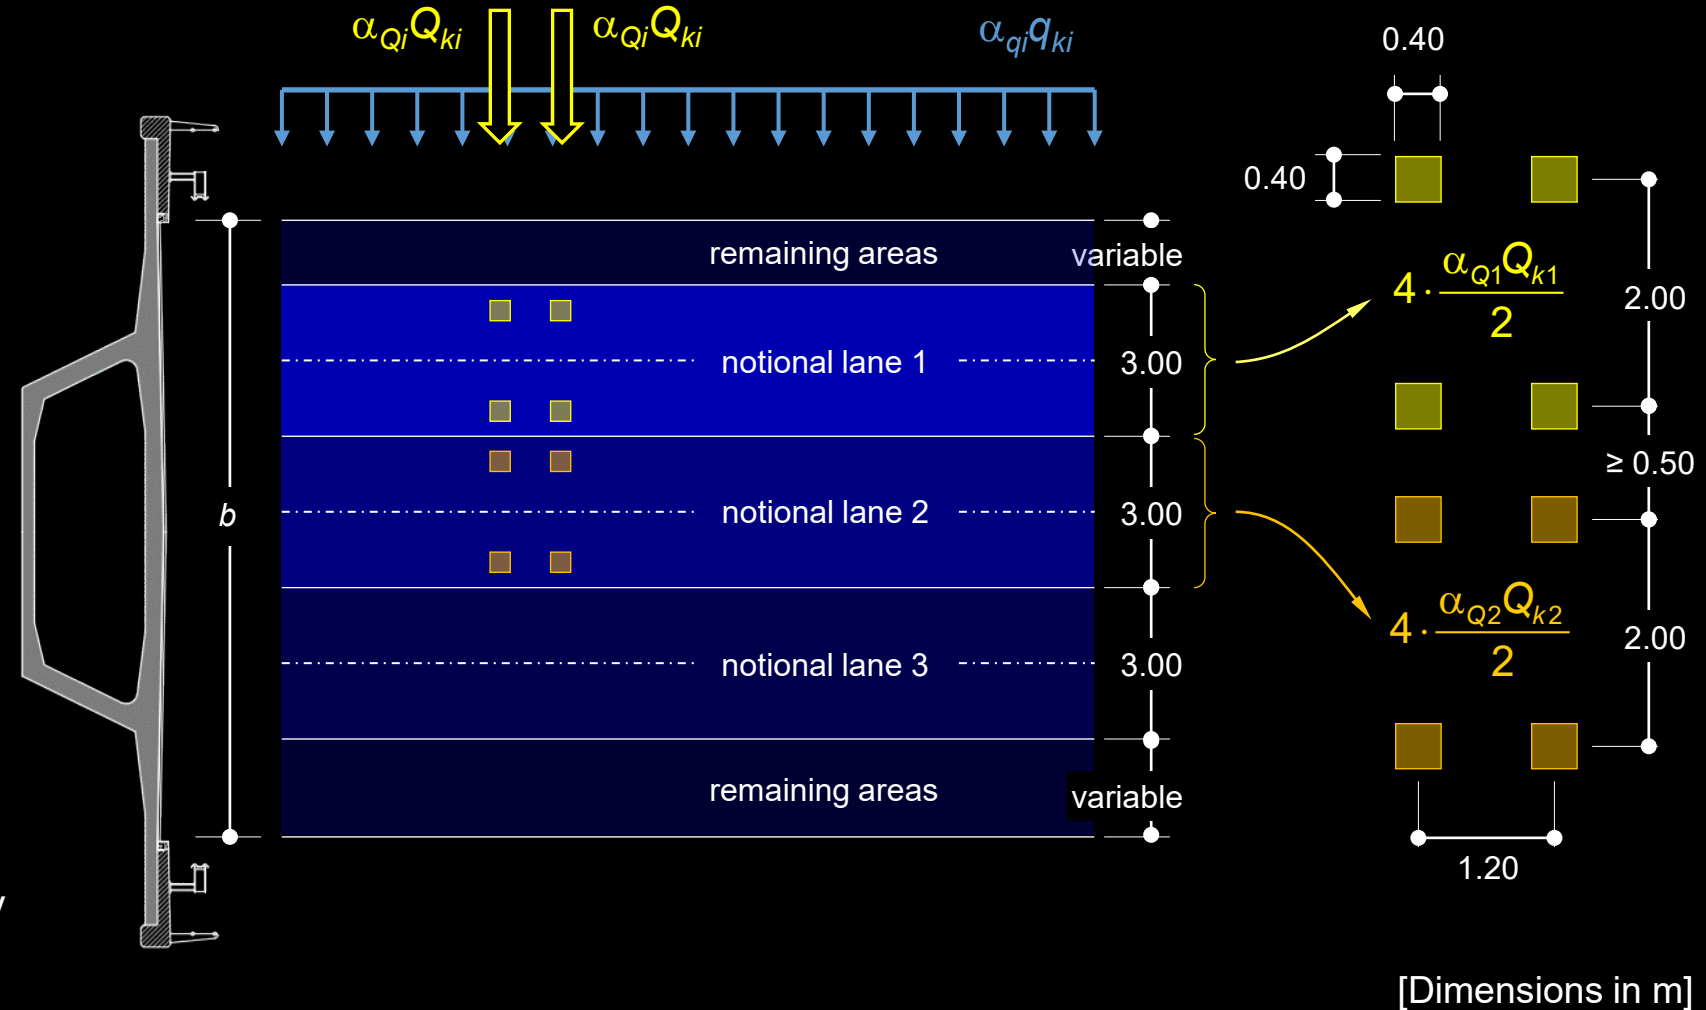

# Design Criteria – Structural Safety and Serviceability: Actions

## Live Loads – Road traffic

'Horizontal' Forces (only in combination with LM1):

Acceleration (QA) and braking (QB) forces:

- Modelled by 'horizontal' forces acting at the height of the roadway surface
- Correspond to the vertical loads of LM1 on Lane 1:

$$QA_k = QB_k = 1.2 \alpha_{Q1} Q_{k1} + 0.1 \alpha_{q1} q_{k1} b_1 L$$

$$QA_k = QB_k \leq 900 \text{ kN}$$

where  $L$  = distance between expansion joints

- Act in the axis of Lane 1

*(For simplicity the line of action may be taken as the axis of the roadway, unless the eccentricity has a significant influence on the internal forces of the structure)*

Centrifugal (QZ) and transverse forces:

- Generally of secondary importance in road bridges
- Centrifugal forces assumed to act in a radial direction at the height of the roadway surface:

Radius of curvature $r$	$QZ_k$
$r < 200 \text{ m}$	$0.2 Q_v$
$200 \text{ m} \leq r \leq 1500 \text{ m}$	$Q_v (40 \text{ m} / r)$
$r > 1500 \text{ m}$	0

where  $Q_v = \sum \alpha_{Qi} (2Q_{ki})$  [from LM1]

- With the braking force  $QB_k$  acting in the longitudinal direction, a simultaneous transverse force of  $0.25QB_k$  shall be assumed.



# Design Criteria – Structural Safety and Serviceability: Actions

## Live Loads – Road traffic

### Fatigue:

- Structural members subjected to load cycles shall be investigated for fatigue effects.
- Number of load cycles depends on:
  - **Service (working) life of bridge**

*Typically 70...75 years for new bridges (often, design is carried out for infinite fatigue life = Dauerfestigkeit)*

- **Volume of traffic**

*Indicative values below:*

Road category	Example	Number of vehicles over 3.5 t per year and direction of traffic
1	national highways	2 000 000
2	main roads	500 000
3	collecting roads	125 000
4	access roads	50 000

- Only **axle loads of Load Model 1**, acting on notional **Lane 1** shall be considered
- Transverse placement of the axle loads corresponds to the **effective (driving) lane**, not notional lanes.
- Longitudinally, axle loads are arranged in the most unfavourable positions to determine the **maximum and minimum stresses** for the considered member

# Design Criteria – **Structural Safety and Serviceability: Actions**

## Live Loads – Rail traffic

- Covered in SIA 261, Chapter 11 (and 12 for narrow gauge)
- Focus on **Normal Gauge (1435 mm) rail**, design speed  $\leq 200$  km/h (high speed and narrow gauge rail loads are similar in principle)
- Design based on **planned number and position of tracks**
- Account for:
  - Track deviations from planned position
  - Uneven distribution of axle loads on rails
- Service criteria agreement and basis of design shall specify (where applicable):
  - Alternative track positions (e.g. in railway station underpasses, consider tracks in any transverse position)
  - Loads models for trains not covered by code
  - Need for load tests
  - Load models and aerodynamic forces for  $V > 200$  km/h




# Design Criteria – Structural Safety and Serviceability: Actions

## Live Loads – Rail traffic

### Load Models (static effect)

- LM1 – normal rail traffic
- LM2 – normal rail traffic on continuous girders (to be applied only once per track)
- LM3 – heavy rail traffic (to be applied only once per structure, and only where applicable, to be decided by supervisory authority)

Load Model	$Q_k$ [kN]	$q_k$ [kN/m]
1	250	80
2	-	133
3	-	150

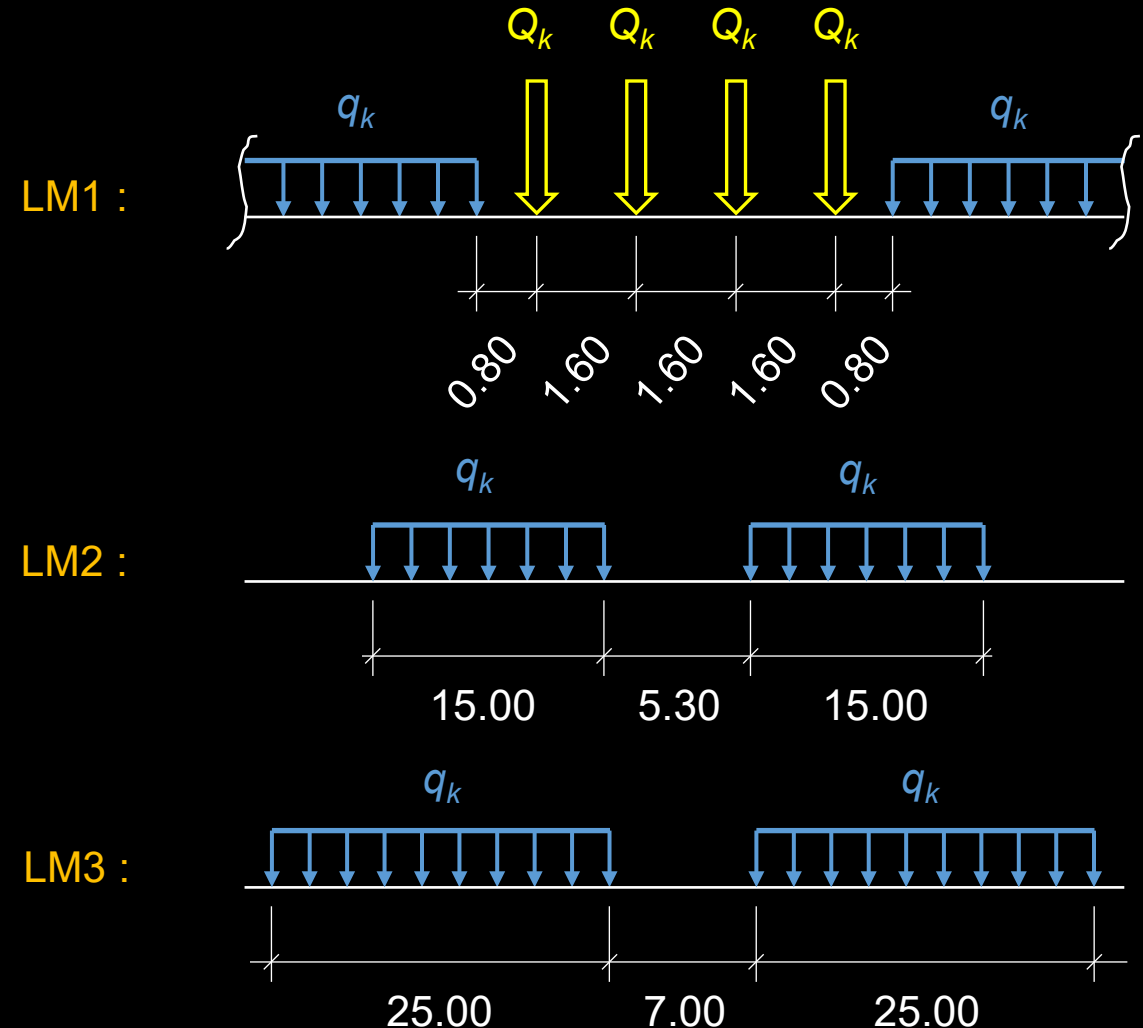

# Design Criteria – Structural Safety and Serviceability: Actions

- Live Loads – Rail traffic:

- Acceleration (QA) and braking (QB) forces:

- Modelled by ‘horizontal’ forces acting in the axis of the track at the top of the rails
    - Assumed uniformly distributed over length  $l$  [m] on which vertical rail traffic loads act:

Load Model	$QA_k$ [kN]	$QB_k$ [kN]
1	$33 l \leq 1000$	$20 l \leq 6000$
2	$33 l \leq 1000$	$20 l$
3	$33 l \leq 1000$	$35 l$

- For special construction (sliding platforms, moveable bridges) values shall be increased by 25%
    - For structures with  $l > 300$  m,  $QA_k$  &  $QB_k$  shall be specified through consultation with the supervisory authority

- Nosing force (Schlingerkraft QS):

- Accounts for effect of lateral impacts caused by nosing of the vehicle
    - Modelled by ‘horizontal’ concentrated force acting in the most unfavourable position, at the top of the rails, perpendicular to the axis of the track:
    - $QS_k = 100$  kN

# Design Criteria – Structural Safety and Serviceability: Actions

- Live Loads – Rail traffic:

- Centrifugal forces (QZ, qZ):


- Considered in the case of curved track sections
- Assumed to act in a radial direction, 1.8 m above the top of the rails
- Characteristic values are a function of the vertical rail traffic loads (for all load models):

$$QZ_k = \frac{\eta v^2 Q_k}{rg} \quad qZ_k = \frac{\eta v^2 q_k}{rg}$$

where:

- $g$  = acceleration of gravity (9.81 m/s<sup>2</sup>)
- $r$  = radius of curvature (m)
- $v$  = design speed (m/s)
- $\eta$  = reduction factor if  $v > 120$  km/h

- Design speed specified by supervisory authority
- For LM3,  $v \leq 80$  km/h (= 22.2 m/s)
- For  $v > 120$  km/h, check for:
  - Full loads LM1 or LM2 with QZ & qZ for  $v = 120$  km/h
  - LM1 or LM2 multiplied by  $\eta$  together with corresp. QZ & qZ forces for specified  $v > 120$  km/h

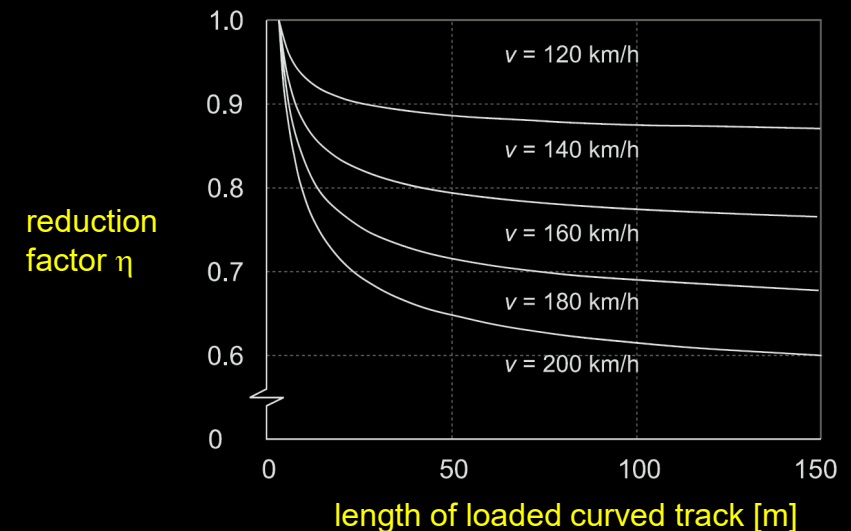

# Design Criteria – Structural Safety and Serviceability: Actions

## Live Loads – Rail traffic

### Dynamic Factor

Accounts for track/vehicle imperfections

$$\Phi = \frac{1.44}{\sqrt{l_{\Phi}} - 0.2} + 0.82 \quad 1 \leq \Phi \leq 1.67$$

where  $l_{\Phi}$  (m), the decisive length (table 15 of SIA 261)

For arch and concrete bridges with cover  $> 1$  m,  $\Phi$  can be reduced:

$$\Phi_{\text{red}} = \Phi - \frac{h-1}{10} \geq 1$$

where  $h$  (m), denotes the cover including the ballast.

For columns with a slenderness ratio  $< 30$ , abutments, foundations, retaining walls and ground pressures:

$$\Phi = 1$$

Case	Structural member	Decisive length $l_{\Phi}$
Longitudinal direction		
1	simply supported beams and single span slabs	span in principal structural direction
2	continuous girders and slabs over $n$ spans	$l_{\Phi} = \sum l_i k/n$ ( $k = 1 + 0.1n \leq 1.5$ )
3	arch girders, stiffened girders of bowstring	half span
4	single span frames	$l_{\Phi} = 1.3(l_{s1} + l_r + l_{s2})/3$
5	multiple-span frames	as in case 2, lengths of end legs as extra spans
Transverse direction		
<b>Steel deck with longitudinal and transverse ribs</b> (orthotropic plates with ballast bed)		
6	deck in both directions	three times cross girder spacing
7	longitudinal ribs with cantilevers up to 0.5 m	three times cross girder spacing
8	cross girders	twice length of cross girder
<b>Steel deck without longitudinal ribs</b> (orthotropic plates with ballast bed)		
9	deck in both directions	twice cross girder spacing plus 3 m
10	cross girders	twice cross girder spacing plus 3 m
<b>Concrete deck</b> (with ballast bed)		
11	deck as part of box girder	three times spacing between webs
12	cantilever part of the deck	three times spacing between webs
13	trough bridge with deck spanning in transverse direction	twice span of deck plus 3 m
14	trough bridge with deck spanning in longitudinal direction	twice span of deck or span of longitudinal girder (the smaller value applies)
Vertical direction		
15	suspension bars of deck-stiffened arches	four times longitudinal spacing of suspension bars
16	columns, bearings, tension anchors, joints	analogous to Cases 1 to 5

# Design Criteria – Structural Safety and Serviceability: Actions

## Live Loads – Rail traffic

### Factor for the classification of standard load models

Accounts for composition of rail traffic

Normal case  $\alpha = 1.33$

Existing bridges  $\alpha = 1.00$

Applies to:

- LM1 & LM2 loads
- Acceleration forces
- Braking forces
- Centrifugal forces
- Nosing forces
- Earth pressures due to rail traffic

## • Live Loads – Rail traffic

### Groups of actions

All actions shall be considered in groups as follows:

- For bridges with 2 tracks, consider:
  - LM1 or LM2 on both tracks
  - LM1 on one track & LM2 on the other track
  - LM3 on one track & LM1/LM2 on the other track
- For bridges with  $\geq 3$  tracks, actions shall be specified in consultation with the supervisory authority.
- Consider most unfavourable effect of:
  - 100% (QA or QB) + 50% (QS, QZ, qZ)
  - 50% (QA or QB) + 100% (QS, QZ, qZ)


# Design Criteria – Structural Safety and Serviceability: Actions

## Live Loads – Rail traffic

### Load eccentricity

The following accidental eccentricities shall be considered:

- For bridges with ballast, consider **deviation of track axis** from planned position of  $\pm 100$  mm.
- For LM1 & LM2, consider **eccentricity of axle load** of 1/18 of track width (**80 mm**) to account for non-uniform loading of rail vehicles.
- Consider eccentricities due to track cant according to the following sketch:

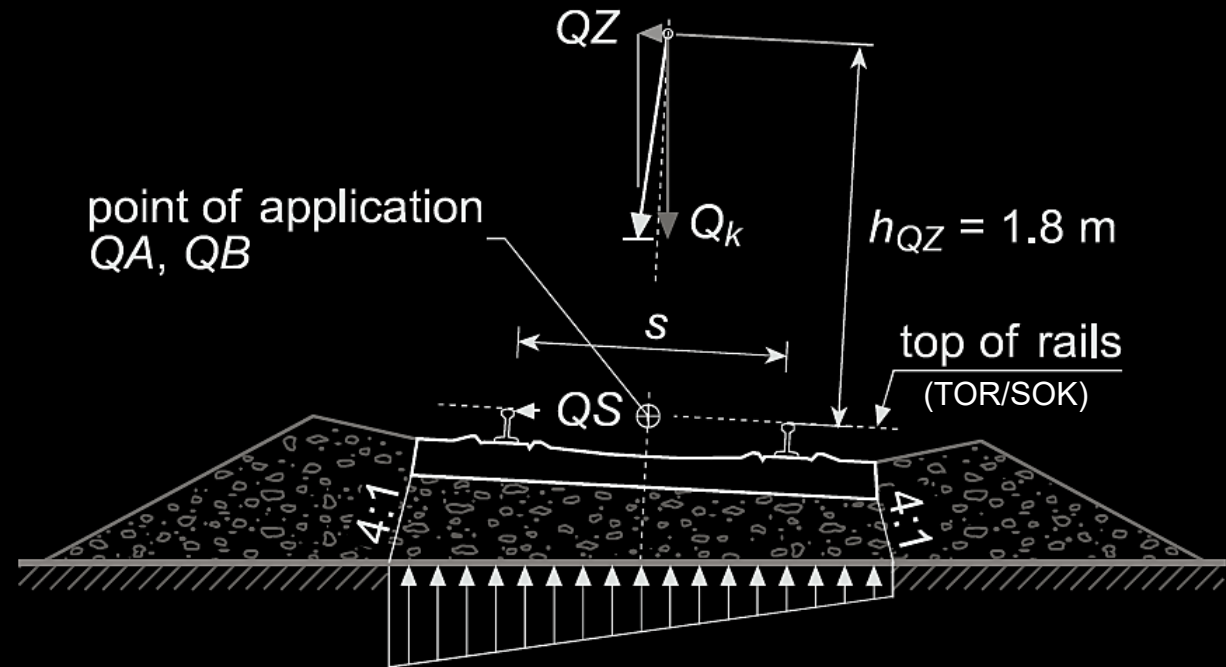

*Point of application and actions*

Top of rails (TOR) = Schienenoberkante (SOK)



# Design Criteria – Structural Safety and Serviceability: Actions


## Live Loads – Rail traffic

### Load distribution

May be considered according to the following sketches:




*Grooved rail embedded in concrete*

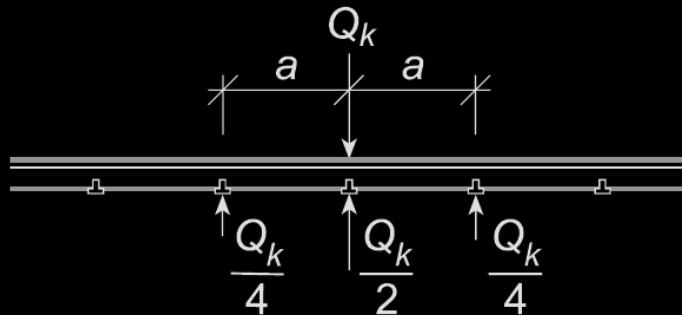

$a$  = distance between rail support points

*Rail supported on sleepers*

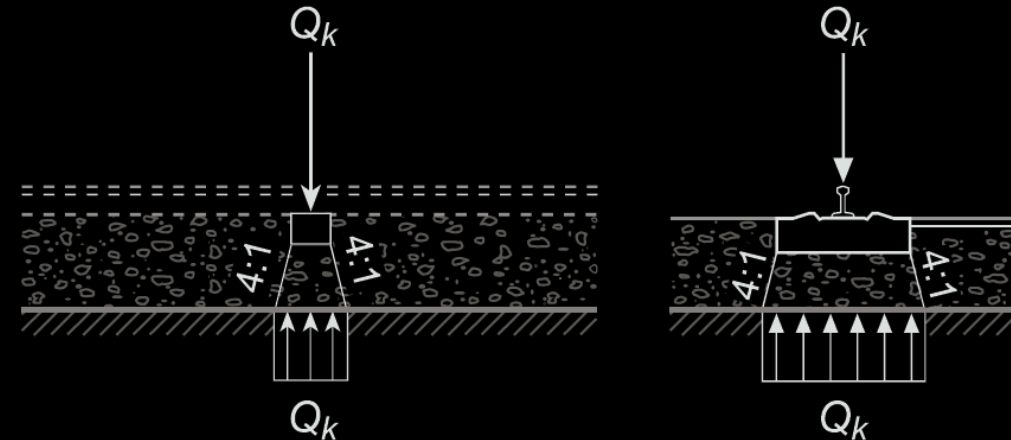

*Sleepers supported on ballast bed*

# Design Criteria – Structural Safety and Serviceability: Actions

## Live Loads – Rail traffic

### Fatigue

- Structural members of railway bridges subjected to alternating loads shall be investigated for fatigue
- Number of loaded cycles depends on:
  - **Service (working) life of bridge**  
*Typically 100 years for new bridges (often, design is carried out for infinite fatigue life = Dauerfestigkeit)*
  - **Traffic volume**

*Indicative values below:*


Traffic composition	Number of trains per day and per track	Annual tonnage per track
regional traffic	≤ 120	≤ 25 000 000
standard traffic	≤ 120	≤ 25 000 000
heavy traffic with 25 t axle loads	> 120	> 25 000 000

- **Fatigue load model**
  - LM1 shall be used
  - $Q_k$  &  $q_k$  values multiplied with  $\Phi$  and  $\alpha$  factors
  - $QZ$  &  $qZ$  shall be considered with  $\alpha = 1$
  - For > 3 tracks, fatigue LM shall be applied to 2 tracks max.
  - In special cases, fatigue may be verified using special load models subject to the approval of the supervisory authority.

# Design Criteria – **Structural Safety and Serviceability: Actions**

## Live Loads – Combined Road & Rail traffic

- Bridges **simultaneously subjected to road and rail traffic loads** shall be dimensioned for the more unfavourable of the following situations:
  - whole traffic surface subjected to road vehicle loading
  - rail traffic loads on track areas, road vehicle loading on remaining traffic areas
  
- For longer spans / major links, it is common to use **double deck solutions** to separate road from rail traffic
  - full combination possible
  - load combinations to be agreed with owner (service criteria agreement)

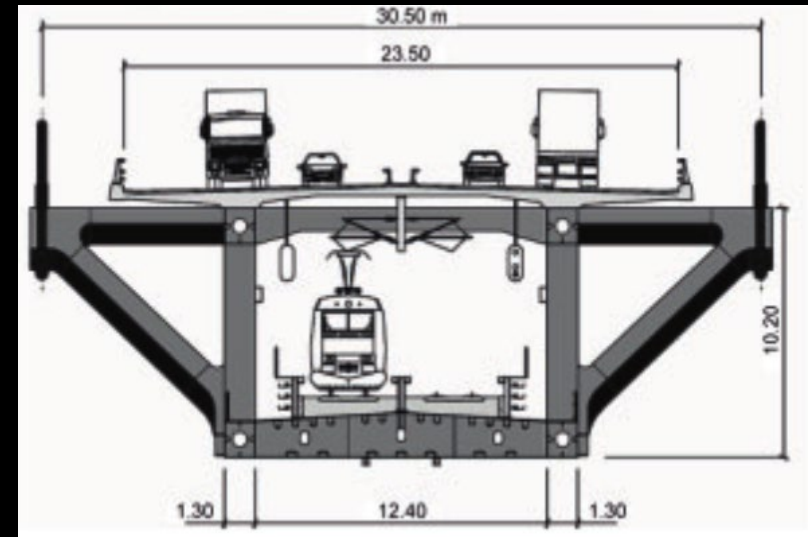

# Design Criteria – Structural Safety and Serviceability: Actions

- **Wind Loads:**

- Covered in **SIA 261, Chapter 6**. These provisions
  - ... apply to bridges with **negligible dynamic response**, i.e. generally road and rail bridges of spans up to 40 m (see also notes).
  - ... can be adapted to cover **longer span** and cable-supported bridges with input from **wind specialists**
- **Wind tunnel tests** are typically required for long span bridges
- Wind forces are generally assumed to act **normal to the surface** under consideration
  
- Effects to be considered:
  - ... **increase of exposed area** due to simultaneous actions such as traffic load, snow or ice accretion
  - ... interaction with **adjacent structures**
  - ... influence of wind-induced **vibrations** on **fatigue life**



*Wind tunnel testing on a new cable-stayed bridge; the presence of an existing truss bridge is accounted for, in order to capture potential interaction between the bridges.*

# Design Criteria – Structural Safety and Serviceability: Actions


- **Wind Loads:**

- Dynamic Pressure,  $q_p$

$$q_p = q_{p0} \cdot c_h$$

reference value – taken from map:

(General: 0.9...1.3 kPa / Alps: 1.1...3.3 kPa)

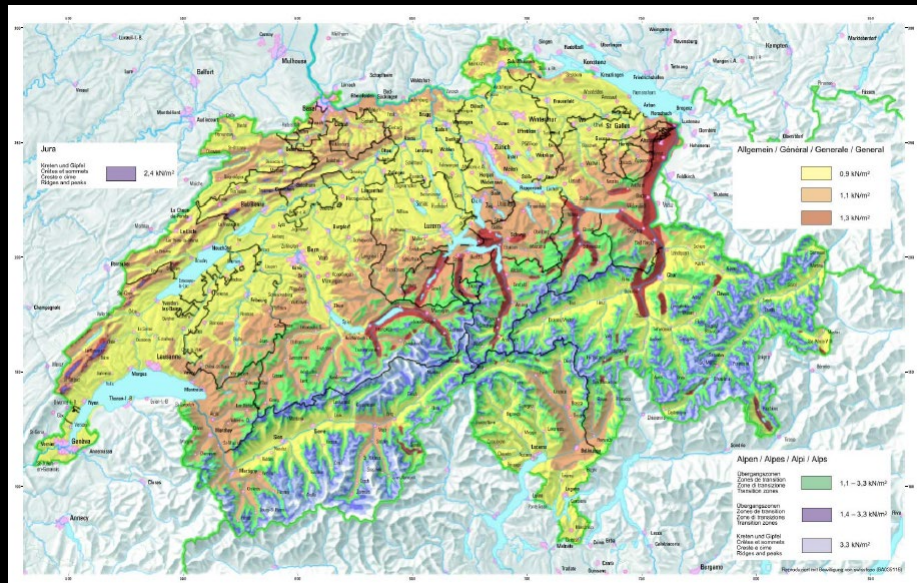


height      terrain roughness

$$c_h = 1.6 \left[ \left( \frac{z}{z_g} \right)^{\alpha_r} + 0.375 \right]^2$$

$z$  [m]

gradient height

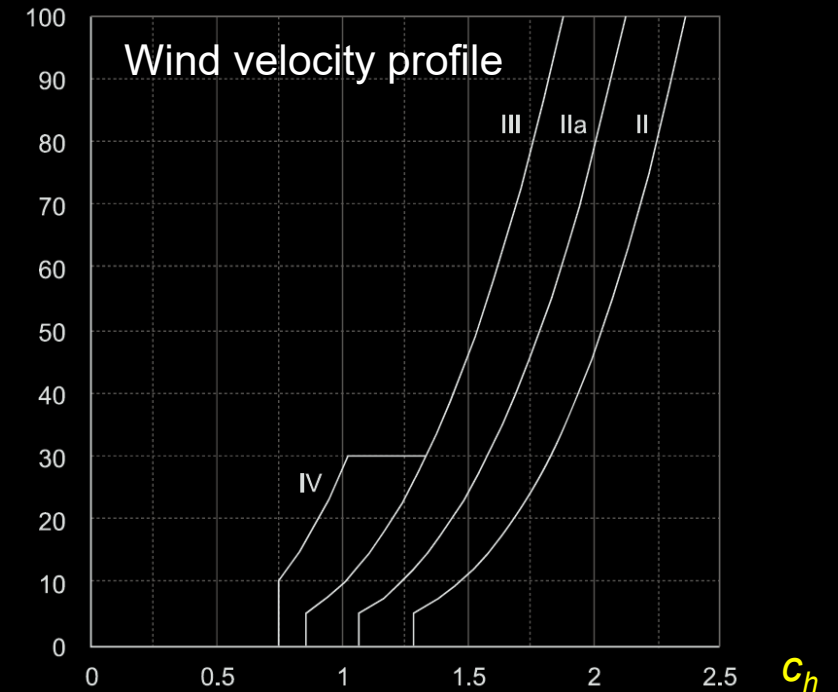

Terrain category	Examples	$z_g$ [m]	$\alpha_r$
II	lakeside	300	0.16
IIa	large plain	380	0.19
III	villages, free field	450	0.23
IV	large urban area	526	0.30




# Design Criteria – Structural Safety and Serviceability: Actions

- **Wind Loads:**

- Wind forces,  $Q_1$  (horizontal) &  $Q_3$  (vertical)

$$Q_{k,1/3} = c_{red} c_d c_{f,1/3} q_p A_{ref}$$

Reduction factor =  $\begin{cases} 1.0 \text{ for superstructure} \\ \text{for substructure:} \end{cases}$   
 dynamic factor (1.0 for short to moderate span bridges, see notes)  
 force factors:  
 dynamic pressure  
 reference area for considered surface

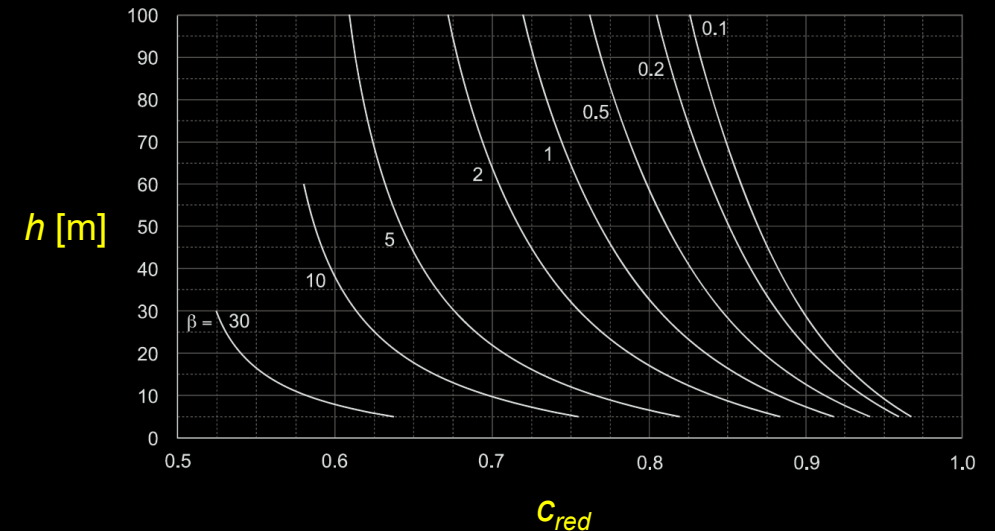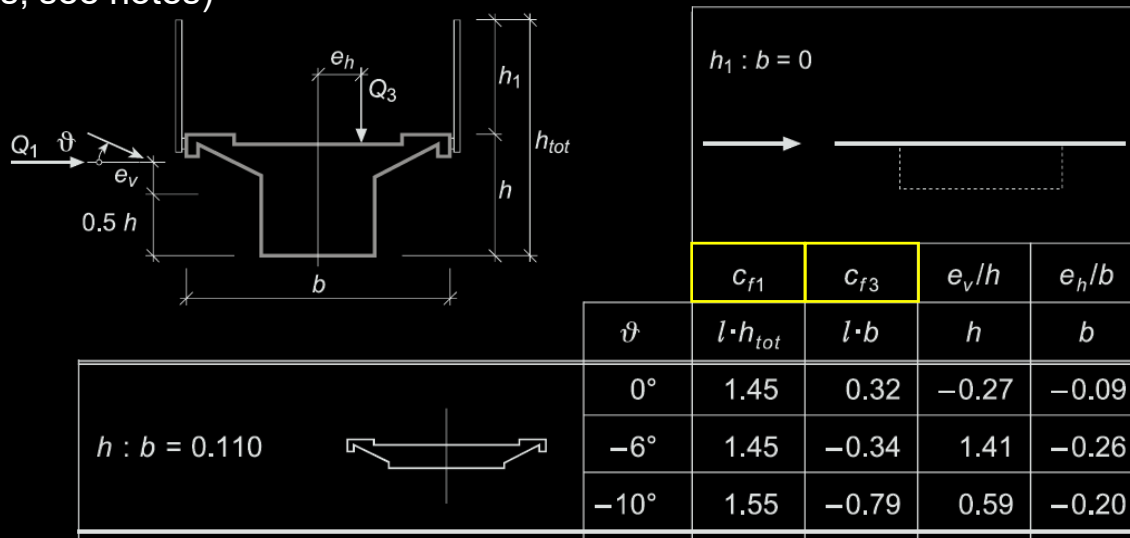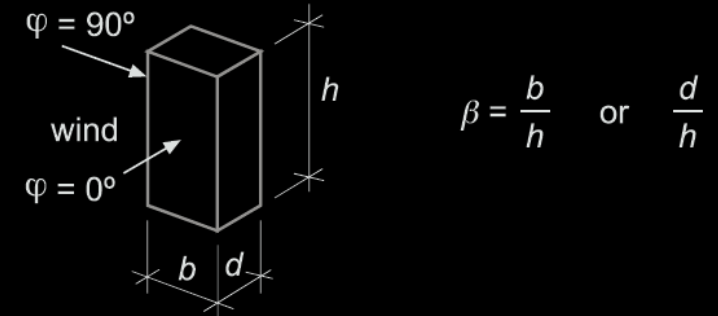

# Design Criteria – Structural Safety and Serviceability: Actions

- Wind Loads:

- Wind forces,  $Q_1$  (horizontal) &  $Q_3$  (vertical) – Force Factors and Eccentricities (Appendix C)

barrier height


section type / aspect ratio

section type / aspect ratio	$\vartheta$	$h_1 : b = 0$				$h_1 : b = 0.15$				$h_1 : b = 0.35$				$h_1 : b = 0.15$				$h_1 : b = 0.35$			
		$c_{f1}$	$c_{f3}$	$e_v/h$	$e_h/b$	$c_{f1}$	$c_{f3}$	$e_v/h$	$e_h/b$	$c_{f1}$	$c_{f3}$	$e_v/h$	$e_h/b$	$c_{f1}$	$c_{f3}$	$e_v/h$	$e_h/b$	$c_{f1}$	$c_{f3}$	$e_v/h$	$e_h/b$
		$l \cdot h_{tot}$	$l \cdot b$	$h$	$b$	$l \cdot h_{tot}$	$l \cdot b$	$h$	$b$	$l \cdot h_{tot}$	$l \cdot b$	$h$	$b$	$l \cdot h_{tot}$	$l \cdot b$	$h$	$b$	$l \cdot h_{tot}$	$l \cdot b$	$h$	$b$
$h : b = 0.110$	0°	1.45	0.32	-0.27	-0.09	0.92	0.02	0.09	0.00	0.91	-0.01	-0.50	0.00	0.77	0.49	-0.64	-0.20	1.10	1.06	-0.59	-0.16
	-6°	1.45	-0.34	1.41	-0.26	0.92	-0.45	0.73	-0.10	1.07	-0.27	0.41	-0.01	0.85	-0.10	1.41	-0.06	1.11	0.63	-0.59	-0.09
	-10°	1.55	-0.79	0.59	-0.20	1.12	-0.54	0.73	-0.10	1.23	-0.37	0.86	-0.05	0.54	-0.63	0.59	-0.20	1.04	0.28	0.00	-0.01
$h : b = 0.282$	0°	1.65	-0.41	1.13	-0.19	1.00	-0.48	0.95	-0.18	1.14	-0.38	0.94	-0.08	1.16	0.00	1.19	0.00	1.12	0.39	0.50	0.02
	-6°	1.42	-0.61	0.92	-0.22	1.13	-0.38	1.00	-0.13	1.27	-0.26	0.97	-0.06	0.87	-0.23	1.40	-0.17	0.98	0.29	0.68	0.04
	-10°	1.38	-0.61	0.84	-0.20	1.24	-0.30	1.05	-0.10	1.36	-0.19	1.02	-0.04	0.72	-0.52	0.89	-0.24	0.87	0.14	0.86	0.04
$h : b = 0.510$	0°	1.72	-0.87	0.56	-0.04	1.32	-0.79	0.57	0.04	1.67											0.00
	-6°	1.73	-0.78	0.52	-0.01	1.42	-0.62	0.55	-0.02	1.81											0.01
	-10°	1.74	-0.59	0.47	0.00	1.52	-0.45	0.55	-0.01	1.81											0.01
$h : b = 0.110$	0°	1.55	0.14	-0.48	-0.09	1.19	-0.14	-0.01	0.02	1.07											-0.16
	-6°	1.55	-0.46	1.28	-0.22	1.12	-0.44	0.73	-0.10	1.26											-0.10
	-10°	1.55	-0.84	0.56	-0.18	1.31	-0.52	0.73	-0.10	1.37											-0.05
$h : b = 0.305$	0°	1.71	-0.61	0.93	-0.19	1.21	-0.62	0.85	-0.16	1.26											0.02
	-6°	1.51	-0.70	0.82	-0.20	1.28	-0.42	0.97	-0.13	1.42											0.02
	-10°	1.54	-0.67	0.81	-0.18	1.36	-0.29	1.05	-0.09	1.44											0.01
$h : b = 0.250$	0°	2.16	-0.72	0.87	-0.19	1.20	-0.66	0.82	-0.18	1.28											0.02
	-6°	1.88	-0.76	0.81	-0.21	1.28	-0.53	0.90	-0.16	1.41											0.03
	-10°	1.72	-0.70	0.81	-0.21	1.35	-0.37	1.04	-0.14	1.57	-0.34	1.03	-0.07	0.88	-0.52	0.96	-0.26	1.22	0.13	0.97	0.02

# Design Criteria – Structural Safety and Serviceability: Actions

- Wind Loads:

- Wind forces – Trusses

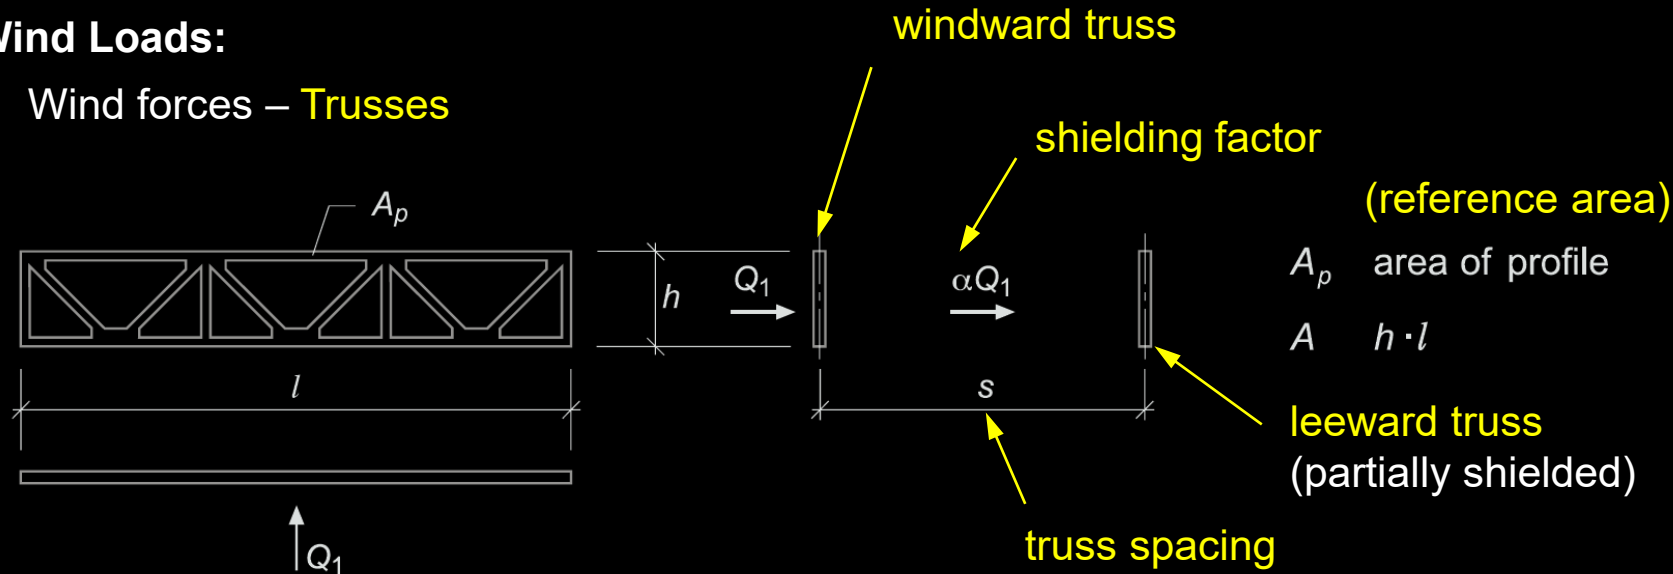

Force factor,  $c_{f1}$

$A_p / A$	$c_{f1}$
0.01	2.0
0.1	1.9
0.15	1.8
0.2	1.7
0.3...0.8	1.6
0.95	1.8
1.0	2.0

Reduction factor,  $c_{red}$

$A_p / A$	0.25	0.5	0.9	0.95	1.0
$l / h = 5$	0.96	0.91	0.87	0.77	0.6
$l / h = 20$	0.98	0.97	0.94	0.89	0.75
$l / h = 50$	0.99	0.98	0.97	0.95	0.9
$l / h = \infty$	1.0	1.0	1.0	1.0	1.0

Shielding factor,  $\alpha$

$A_p / A$	0.1	0.2	0.3	0.4	0.5	0.6...1.0
$s / h = 0.5$	0.93	0.75	0.56	0.38	0.19	0
$s / h = 1$	0.99	0.81	0.65	0.48	0.32	0.15
$s / h = 2$	1.0	0.87	0.73	0.59	0.44	0.3
$s / h = 4$	1.0	0.9	0.78	0.65	0.52	0.4
$s / h = 6$	1.0	0.93	0.83	0.72	0.61	0.5









# Design Criteria – Structural Safety and Serviceability: Actions

- Wind Loads:

- Wind forces – Cables


Force factors for wires, bars, tubes and cables with  $l / d \geq 100$

$d \sqrt{q_p}$  kPa	Global force factors $c_f$			
	reference area = $d \cdot l$ ( $d$ = diameter, $l$ = length, both in m)			
$\leq 0.3$	1.2	1.2	1.2	1.3
$> 0.3$	0.5	0.7	0.9	1.1
	 smooth wires, bars and tubes	 medium rough wires and bars	 fine-stranded power and suspension cables	 coarse-stranded power and suspension cables

# Design Criteria – Structural Safety and Serviceability: Actions

- **Temperature Effects:**

- Covered in SIA 261, Chapter 7
  - Only **climatic effects** are addressed
  - Temperature variations lead to **deformations**
  - **Restrained deformations** lead to **stresses**
- Basically, the designer may choose to ... **accomodate deformations** or ... **design for restraint stresses**
- see **Support and Articulation** chapter (jointed bridges vs. integral and semi-integral bridges)

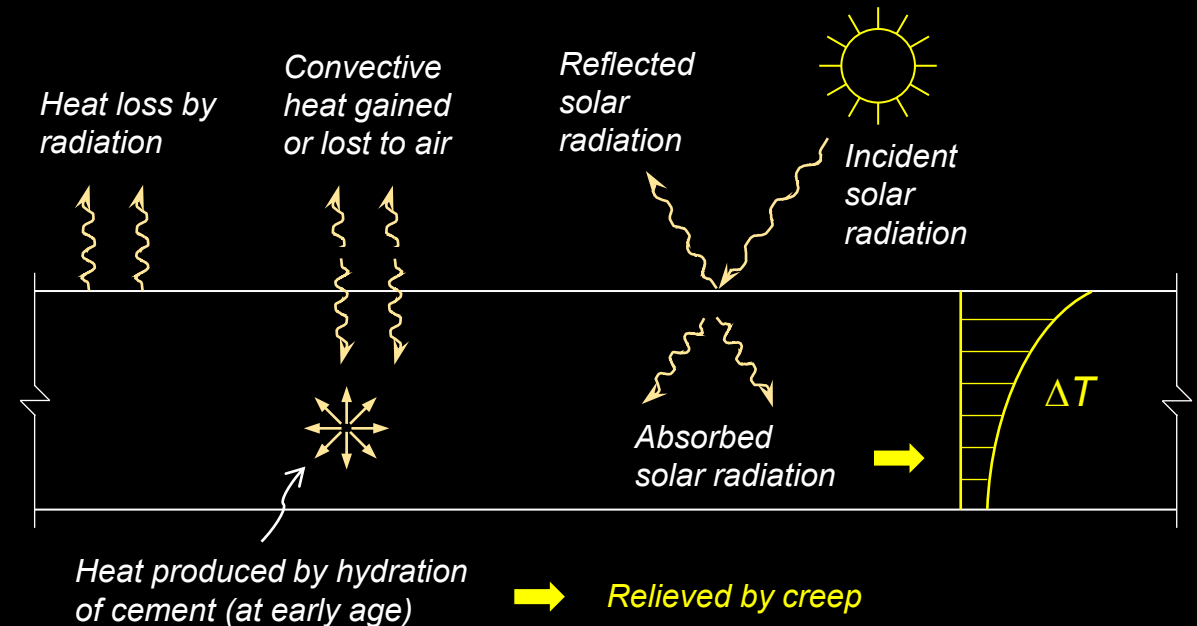

Heat transfer processes for a bridge deck in daytime in summer [after Ghali et al, 2002]

$$\epsilon_T = \alpha_T \Delta T$$

strain due to temperature variation

temperature variation

coefficient of thermal expansion =  $10^{-5} / ^\circ\text{C}$  for concrete & steel

# Design Criteria – Structural Safety and Serviceability: Actions


- **Temperature Effects:**

- Components of **temperature variation**:

- **Uniform** ( $\Delta T_1$ ) – variation from mean

- **Linear** ( $\Delta T_2$ ) – one-sided warming/cooling

- **Non-linear** ( $\Delta T_3$ ) (usually ignored – see next slide)

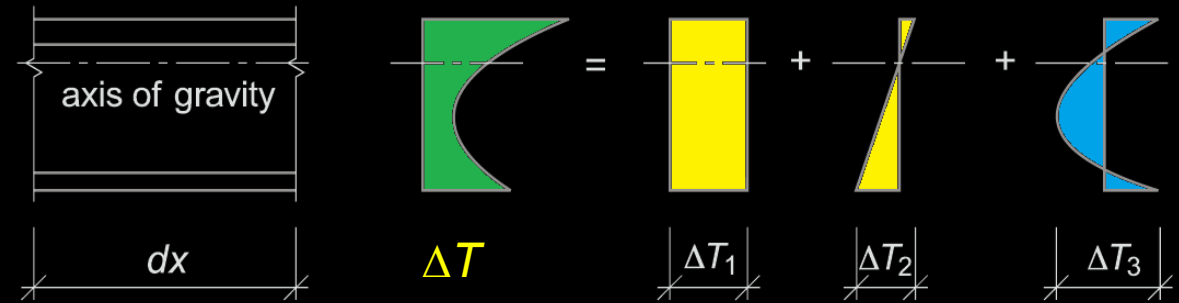

Type of construction	$\Delta T_{1k}$ [°C]
plain concrete	$\pm 15$
reinforced and prestressed concrete	$\pm 20$
steel	$\pm 30$
composite steel-concrete	$\pm 25$


Type of bridge	Warm upper surface $\Delta T_{2k}$ [°C]	Cold upper surface $\Delta T_{2k}$ [°C]
steel bridges	+ 10	- 6
concrete bridges		
$h \leq 1.0$ m	+12	- 4
$h \geq 3.0$ m	+8	- 3
composite bridges		
concrete slab	+12	- 4
steel girder	0	0

$h =$  height of cross-section

# Design Criteria – Structural Safety and Serviceability: Actions

- Temperature Effects:

- Effect of non-linear temperature variation:

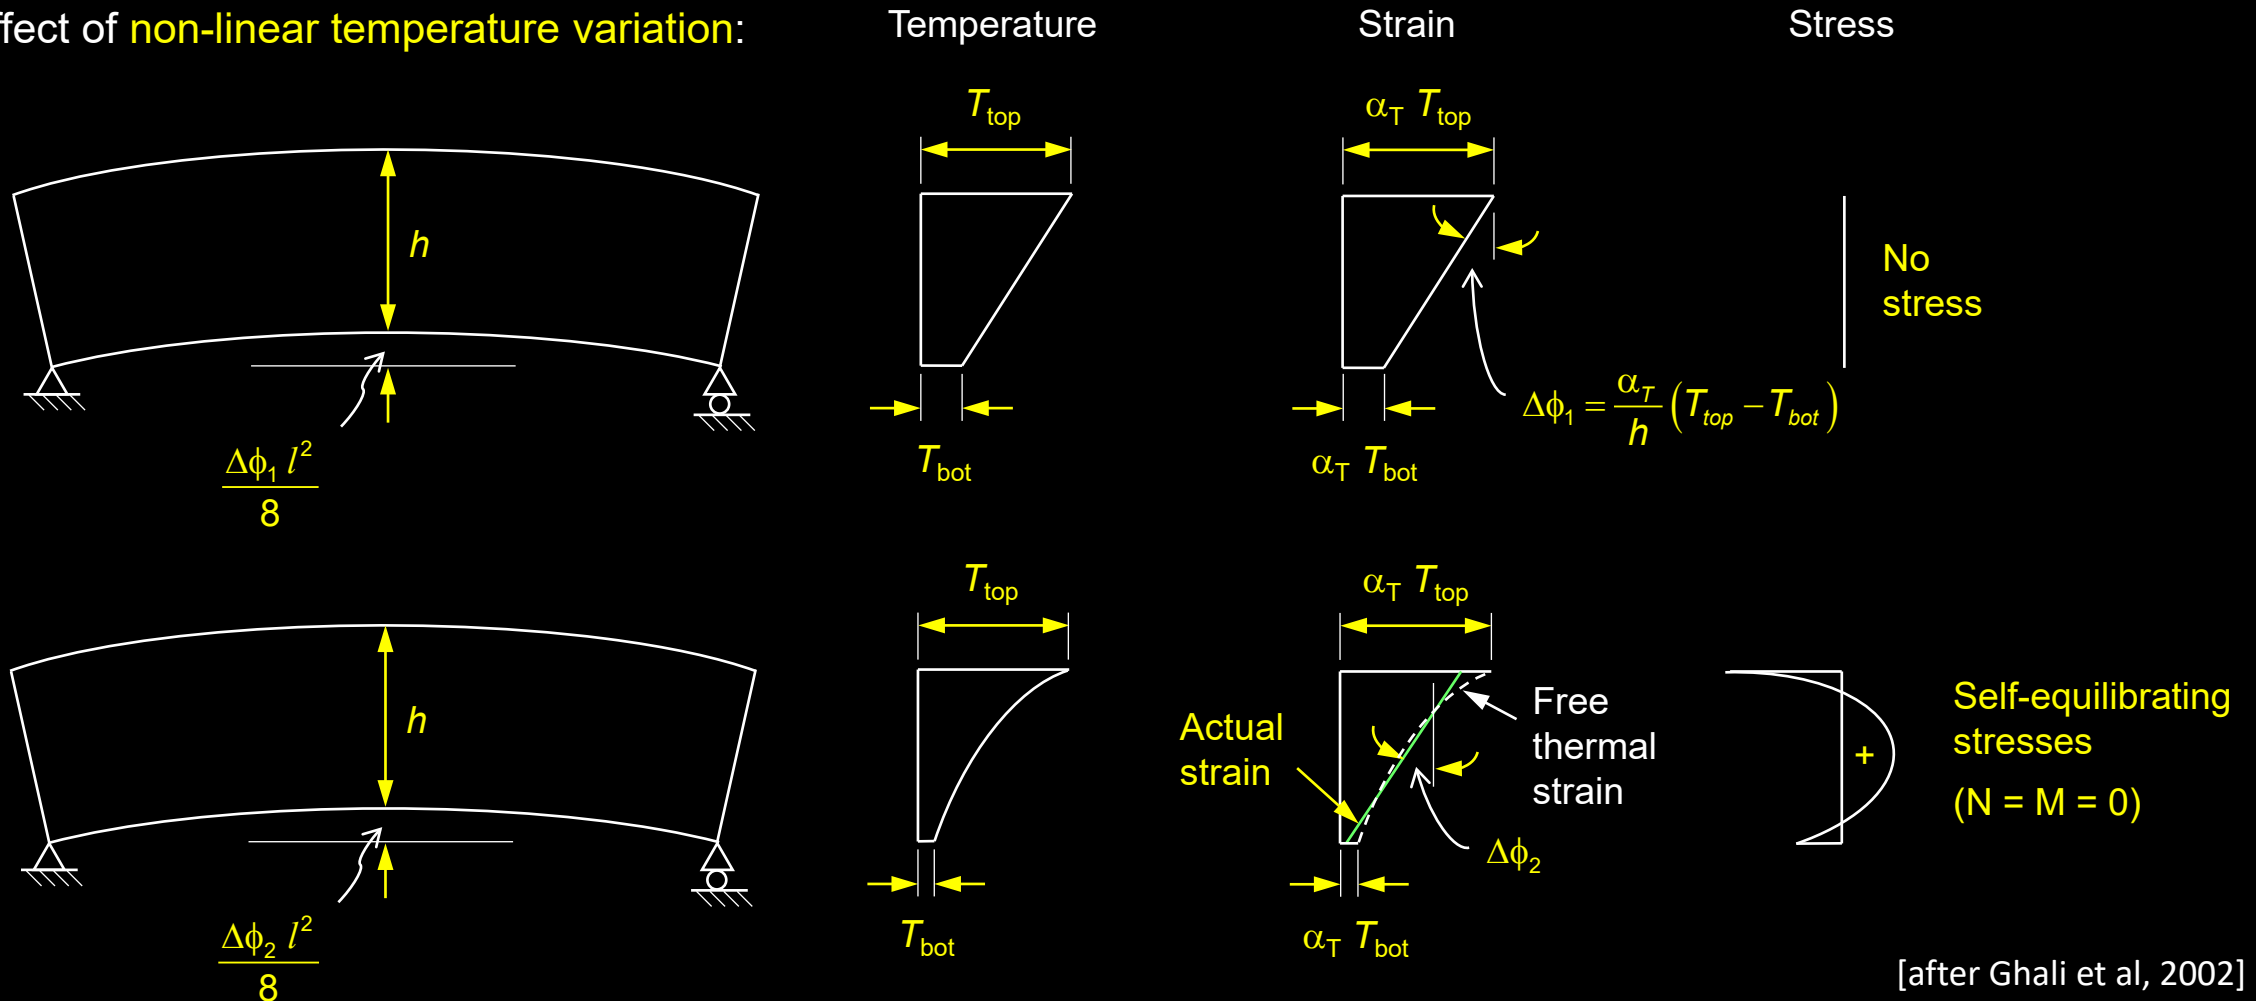

[after Ghali et al, 2002]

# Design Criteria – Structural Safety and Serviceability: Actions

- **Accidental (Extreme) Actions:**


Covered in SIA 261 – see below for chapters

Caused by **human activity/error**:

- Vehicular impact (Ch. 14), Train derailment (Ch. 11 & 12)
- Vessel impact
- Explosion (Ch. 17), Fire (Ch. 15)




Caused by **nature**:

- Seismic (earthquake) loads (Ch. 16)
- Avalanche load
- Ice load

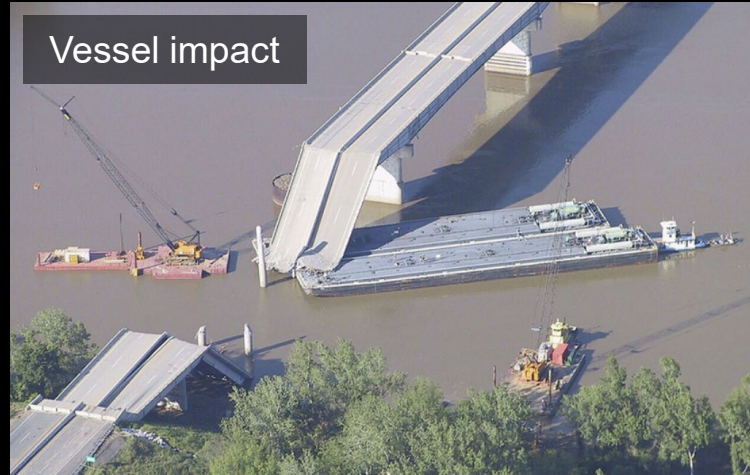

# Design Criteria – Structural Safety and Serviceability: Actions

- The loads depend heavily on the **use of the bridge**
- design of “footbridges” **differs significantly** from “bridges”
  - **focus of lecture: road and railway bridges**

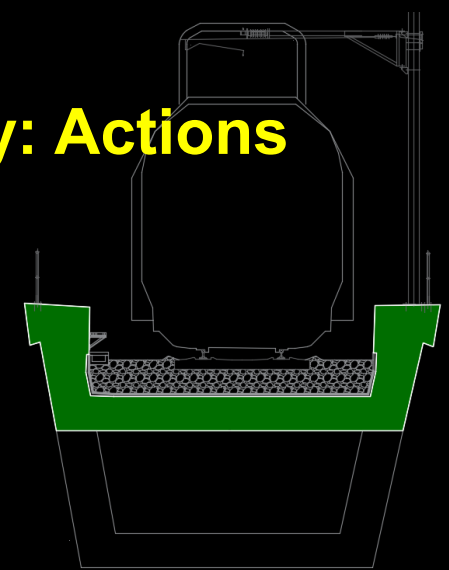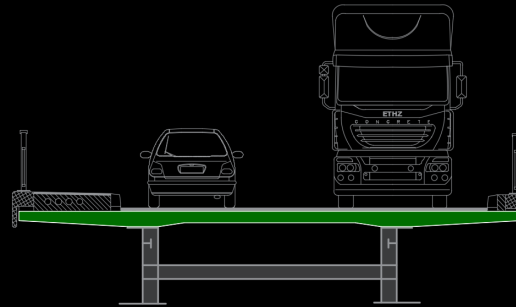

Bridge use	Pedestrian / Bicycle	Road ( $\alpha_Q = \alpha_q = 0.9$ )	Railway ( $\alpha = 1.33, \Phi_{dyn} = 1.67$ for typ. deck)
Concentrated loads “ $Q$ ”	<b>low</b> (service vehicles only) [CH: 10 kN]	<b>high</b> / var. position of vehicle axis [CH LM1: $4 \cdot \alpha_Q \cdot (150 + 100)$ kN = 900 kN]	<b>very high</b> / distributed by ballast [CH LM1: $4 \cdot \alpha \cdot \Phi_{dyn} \cdot 250$ kN = 2220 kN, per track]
Distributed loads “ $q$ ”	<b>moderate</b> [CH: 4 kPa, full width]	<b>moderate-high</b> (on limited width) [CH LM1: $\alpha_q \cdot 9$ kPa = 8.1 kPa, 3 m width]	<b>high</b> [CH LM1: $\alpha \cdot \Phi_{dyn} \cdot 80 = 178$ kN/m, per 3.80 m]
Longitudinal horizontal loads	<b>low</b>	<b>moderate</b> (braking / traction)	<b>high</b> (braking / traction)
Transverse horizontal loads	<b>low</b>	<b>low-moderate</b> (centrifugal)	<b>moderate-high</b> (centrifugal / nosing)
Fatigue	<b>usually irrelevant</b>	<b>moderate</b> (local elements)	<b>highly relevant</b>
Dynamic effects	slender bridges often sensitive to vibrations	included in traffic loads (most codes)	dynamic factor depending on structural element / dynamic analysis for high speed rail
Deflections (vertical)	<b>moderate</b> $w \leq l / 600$ (LM1)	<b>moderate</b> $w \leq l / 500$ (LM1)	<b>highly relevant</b> $w \leq l / 2000, v = 160$ km/h (LM1-2)
Durability issues	<b>moderate</b> (de-icing)	<b>high</b> (de-icing, heavy load on joints)	<b>low</b> (no de-icing, joints not directly loaded)

# Conceptual Design

Design Criteria – Structural Safety and Serviceability

Deformations

Verformungen

# Design Criteria – Structural Safety and Serviceability: Deformations

- Deflection limit criteria for **Roadway bridges:**

Covered in SIA 260 – Appendix B

- Deflection calculation in accordance with corresponding **material codes** (SIA 262 to 266)
- Project specific** deflection limits may be agreed upon with the supervisory authority.
  - Limits can be relaxed for **secondary** members
  - Long span bridges ( $l > 200$  m) require special attention

Limit State	Consequences of effects of actions		
	irreversible	reversible	reversible
	Load case		
	occasional	frequent	quasi-permanent
Functionality - vertical relative displacement at expansion joints	$\delta_v \leq 5 \text{ mm}$ <sup>1) 2) 3)</sup>		
Comfort	$w \leq l / 500$ <sup>4)</sup>		
Appearance	$w \leq l / 700$ <sup>1) 2)</sup>		

**Notes:**

- 1) After deduction of camber. Consider long-term effects: CR + SH.
- 2) After installation of equipment.
- 3) Observe supplier guidelines.
- 4) Due to LM1.



# Design Criteria – Structural Safety and Serviceability: Deformations

- Deflection limit criteria for **Pedestrian and cycle-path bridges:**

Covered in SIA 260 – Appendix C

- Deflection calculation in accordance with corresponding **material codes** (SIA 262 to 266)
- Project specific** deflection limits may be agreed upon with the supervisory authority.
  - Limits can be relaxed for **secondary** members
  - Long span bridges ( $l > 200 \text{ m}$ ) and flexible cable-supported or stress-ribbon bridges require special attention

Limit State	Consequences of effects of actions		
	irreversible	reversible	reversible
	Load case		
	occasional	frequent	quasi-permanent
Functionality <ul style="list-style-type: none"> <li>- deflection within span</li> <li>- vertical relative displacement at expansion joints</li> </ul>		$\delta_v \leq 5 \text{ mm}$ <sup>1) 2) 3)</sup>	$w \leq l / 700$ <sup>1) 2) 3)</sup>
Comfort		$w \leq l / 600$ <sup>4)</sup>	
Appearance			$w \leq l / 700$ <sup>1) 2)</sup>

**Notes:**

- 1) After deduction of camber. Consider long-term effects: CR + SH.
- 2) After installation of equipment.
- 3) Observe supplier guidelines.
- 4) Due to LM1.

# Design Criteria – Structural Safety and Serviceability: Deformations

- Deflection limit criteria for **Normal gauge railway bridges:**

Covered in SIA 260 – Appendix D

- Deflection calculation in accordance with corresponding **material codes** (SIA 262 to 266)
- Project specific** deflection limits may be agreed upon with the supervisory authority.
  - Limits can be relaxed for **secondary** members and **special sections** (feeder tracks, multiple track lines)
  - Long span bridges ( $l > 200$  m) require special attention

Limit State	Consequences of effects of actions		
	irreversible	reversible	reversible
	Load case		
	occasional	frequent <sup>1)</sup>	quasi-permanent
Functionality <sup>2)</sup>	<ul style="list-style-type: none"> <li><b>deflections</b> <sup>3)</sup> <ul style="list-style-type: none"> <li>- <math>v \leq 80</math> km/h</li> <li>- <math>80</math> km/h <math>\leq v \leq 200</math> km/h</li> </ul> </li> <li><b>track twist</b> <ul style="list-style-type: none"> <li>- <math>v \leq 120</math> km/h</li> <li>- <math>120</math> km/h <math>&lt; v \leq 200</math> km/h</li> <li>- <math>v &gt; 200</math> km/h</li> </ul> </li> <li><b>relative vertical displacement of deck ends behind abutments</b> <sup>5)</sup> <ul style="list-style-type: none"> <li>- <math>v \leq 160</math> km/h</li> <li>- <math>v &gt; 160</math> km/h</li> </ul> </li> </ul>		
	$w \leq l / 800$ $w \leq l / (15v - 400)$  $\alpha_t \leq 1.0$ mrad/m $\alpha_t \leq 0.7$ mrad/m $\alpha_t \leq 0.3$ mrad/m  $\delta_v \leq 3$ mm $\delta_v \leq 2$ mm		
Appearance			$w \leq l / 700$ <sup>6) 7)</sup>

See notes below

# Conceptual Design

Design Criteria – Structural Safety and Serviceability

Vibrations

Schwingungen

# Design Criteria – Structural Safety and Serviceability: Vibrations

- **Vibration limit criteria for Pedestrian and cycle-path bridges:**

Covered in SIA 260 – Appendix C and 261 Chapter 9

- Control of vibrations to ensure pedestrian comfort is a critical aspect of the design
- Codes provide guidelines in terms of **limits on eigenfrequencies**.
- Deviations from these limits require explicit modelling of pedestrian movements and dynamic structural response

Limit state	Eigenfrequency [Hz]
Comfort	
• vertical vibrations	$f > 4.5$ or $f < 1.6$
• horizontal vibrations (transverse)	$f > 1.3$
• horizontal vibrations (longitudinal)	$f > 2.5$

**For comparison:**

- Pace frequency for walking  $\approx 2.0$  Hz
- Pace frequency for running  $\approx 2.4 \dots 3.5$  Hz



# Design Criteria – Structural Safety and Serviceability: Vibrations

- **Vibration limit criteria for (High-speed) railway bridges:**

Covered in EN 1990 A1 & 1991-2:

- EN 1991-2 §6.4.4 outlines procedure to determine whether a dynamic analysis is required depending on **design speed** and **eigenfrequencies**

## **Traffic Safety:**

- If a dynamic analysis is required, EN 1990 A1 §A2.4.4.2.1 specifies limits on peak vertical accelerations along the track:
  - **3.5 m/s<sup>2</sup>** for ballasted track
  - **5 m/s<sup>2</sup>** for direct fastened tracksAbove limits ensure **traffic safety** → prevention of **track instability** (e.g. “Schotterflug”)
- It is recommended that the first eigenfrequency of **lateral vibration** of a span is **not less than 1.2 Hz**




# Design Criteria – Structural Safety and Serviceability: Vibrations

- **Vibration limit criteria for (High-speed) railway bridges:**

Covered in EN 1990 A1 & 1991-2:

## Passenger Comfort:

- Depends on vertical acceleration **inside the coach**.
- Recommended levels of comfort (EN 1990 A1, Table A2.9):
  - **Very good** →  $1.0 \text{ m/s}^2$
  - **Good** →  $1.3 \text{ m/s}^2$
  - **Acceptable** →  $2.0 \text{ m/s}^2$
- EN 1990 A1, Figure A2.3 provides deflection limits to implicitly ensure very good level of comfort.
- Alternatively, a **dynamic vehicle/bridge interaction analysis** may be used to explicitly determine vertical accelerations. This analysis is based on **real trains**, i.e. not load models.

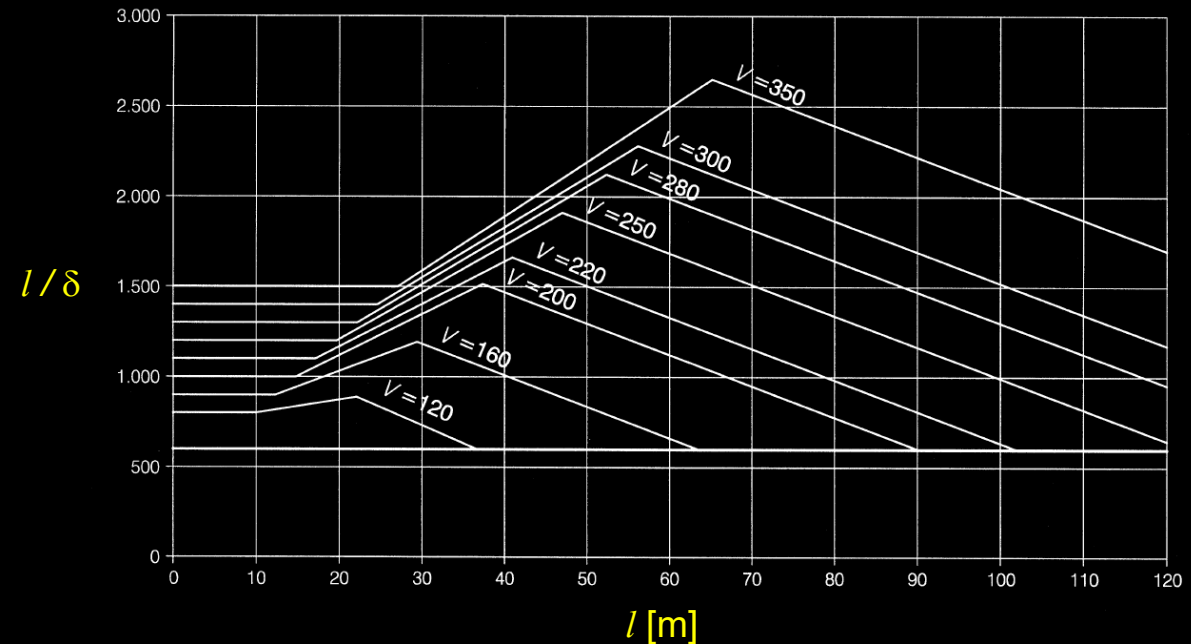

EN 1990 A1, Figure A2.3

# Conceptual Design

Design Criteria – Structural Safety and Serviceability

Clearances

Lichtraumprofile

# Design Criteria – Structural Safety and Serviceability: Clearances

## Clearances

From the definition of a bridge:

- A bridge provides a passage for **vehicles, people, water, materials, utilities, ...**
- A bridge crosses a natural or manmade **obstacle**

Hence, the geometry of the bridge is determined from the geometry of the objects that it **provides passage** to and the objects that it **crosses**.

**Example:** Ohio River Bridge Crossing near Wellsburg, WV, USA (expected opening 2021)


- **Bridge typology, span arrangement** and **erection schemes** were dictated by the clearance requirements
- Various types of clearances had to be provided and at different stages:
  - Navigational, Rail, Vehicular, Pedestrian & Cyclist, Trail
  - During construction, service and future change of usage





# Design Criteria – Structural Safety and Serviceability: Clearances

## Clearances - Example

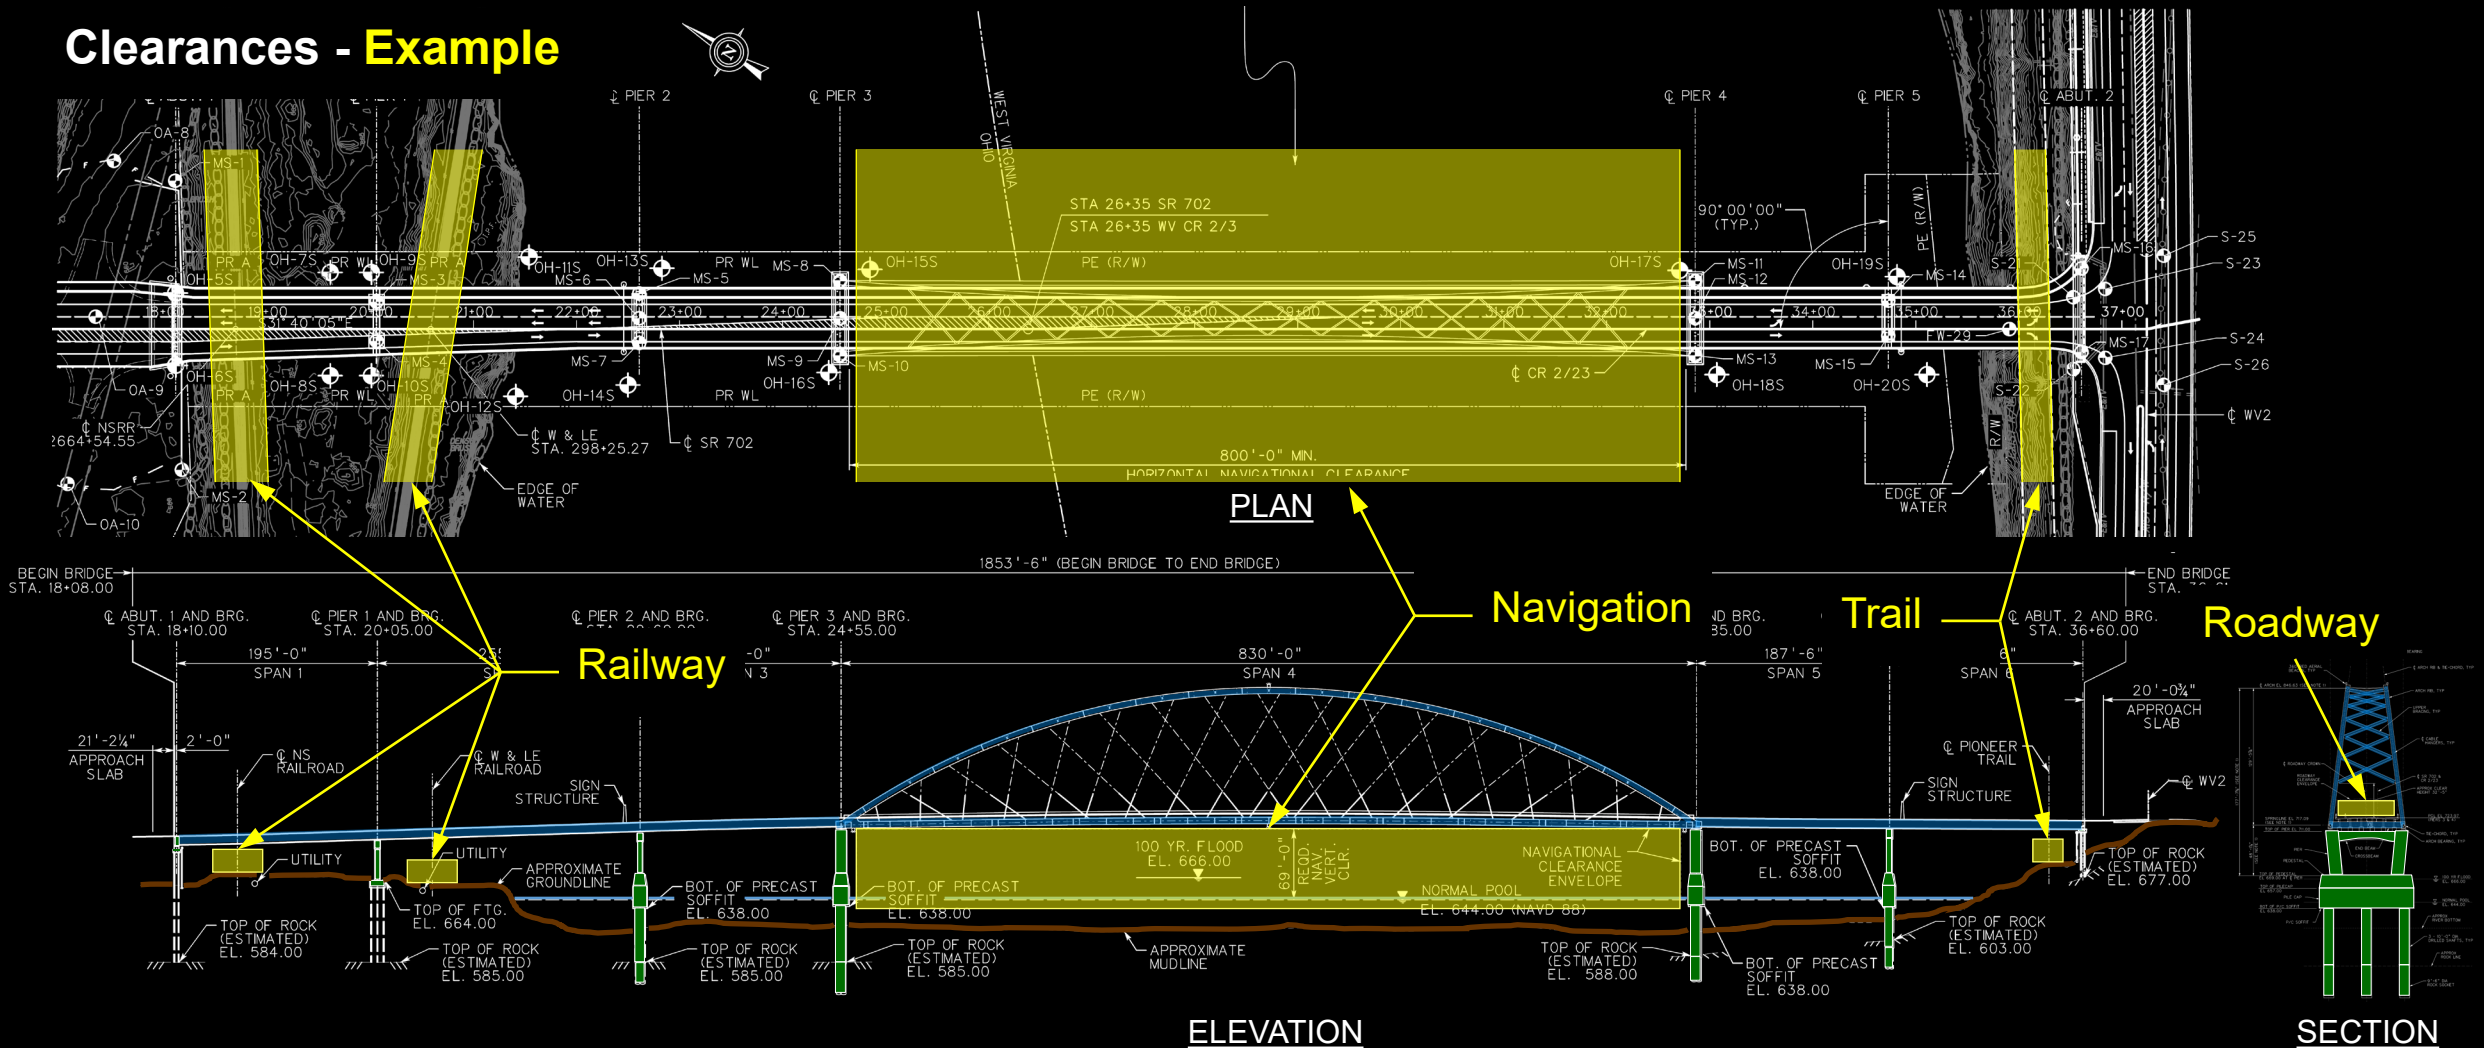

# Design Criteria – Structural Safety and Serviceability: Clearances

## Clearances

During the planning phase:

- Define the **use of the bridge**
  - ... road, railway, etc
  - ... clearance requirements of vehicles on bridge
- Identify **obstacles** that the bridge needs to cross
  - ... over
  - ... under
- Proactively, reach out to **all affected entities** (some may not be aware of the bridge project):
  - ... road authorities, railway companies, coast guard, airports, utility companies, etc.
  - ... establish present and future requirements
- **Clearance restrictions of nearby structures** may dictate the bridge type and/or erection methods. Consider
  - ... how the bridge will be constructed
  - ... how material, equipment and prefabricated elements will be transported to the site



# Design Criteria – Structural Safety and Serviceability: Clearances

## Clearances

During the planning phase:

- Define the **use of the bridge**
  - ... road, railway, etc
  - ... clearance requirements of vehicles on bridge
- Identify **obstacles** that the bridge needs to cross
  - ... over
  - ... under
- Proactively, reach out to **all affected entities** (some may not be aware of the bridge project):
  - ... road authorities, railway companies, coast guard, airports, utility companies, etc.
  - ... establish present and future requirements
- **Clearance restrictions of nearby structures** may dictate the bridge type and/or erection methods. Consider
  - ... how the bridge will be constructed
  - ... how material, equipment and prefabricated elements will be transported to the site




# Design Criteria – Structural Safety and Serviceability: Clearances

## Clearances - Swiss Standards

Clearance Profiles are specified in Guidelines published by:

- **BAV – Bundesamt für Verkehr**  
[Federal Office of Transport]  
Ausführungsbestimmungen zur Eisenbahnverordnung (AB-EBV)  
[Implementing provisions for the Railway Ordinance]
- **VSS – Schweizerischer Verband der Strassen- und Verkehrsfachleute**  
[Swiss Association of Road and Transportation Professionals]  
Standards 40 201 & 40 202 – Typical Geometric Profiles
- **ASTRA - Bundesamt für Strassen**  
[Federal Roads Office (FEDRO)]  
Guidelines – 11001 – Typical Profiles – 1<sup>st</sup> and 2<sup>nd</sup> Class National Roads with direction separation

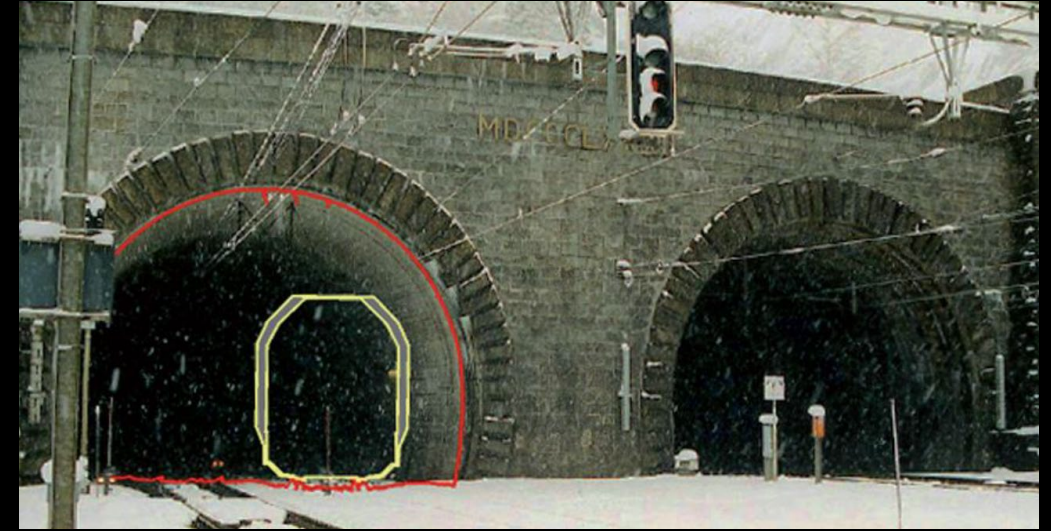

Schweizerische Eidgenossenschaft  
Confédération suisse  
Confederazione Svizzera  
Confederaziun svizra

**Bundesamt für Verkehr BAV**



Forschung und Normierung im Strassen- und Verkehrswesen  
Recherche et normalisation en matière de route et de transports  
Ricerca e normalizzazione in materia di strade e trasporti  
Research and standardization in the field of road and transportation



Schweizerische Eidgenossenschaft  
Confédération suisse  
Confederazione Svizzera  
Confederaziun svizra

**Bundesamt für Strassen ASTRA**

# Design Criteria – Structural Safety and Serviceability: Clearances

## Clearances - Swiss Standards

- BAV – Bundesamt für Verkehr

A-EBV

[Clearance Profile – Standard Gauge]

Clearance Profile EBV 4 (Normalspur):

Applicable for:


- New lines for the North-South routes Basel-Chiasso and Basel-Iselle
- New and extension lines with  $V > 160$  km/h

Note basic dimensions:

Area 1 height = 4.84 m

Area 1 width = 4.20 m

By default, SBB requires a vertical clearance of 6.70 m for new bridges. Lower clearances can often be agreed with SBB (extra cost for catenary adjustments)

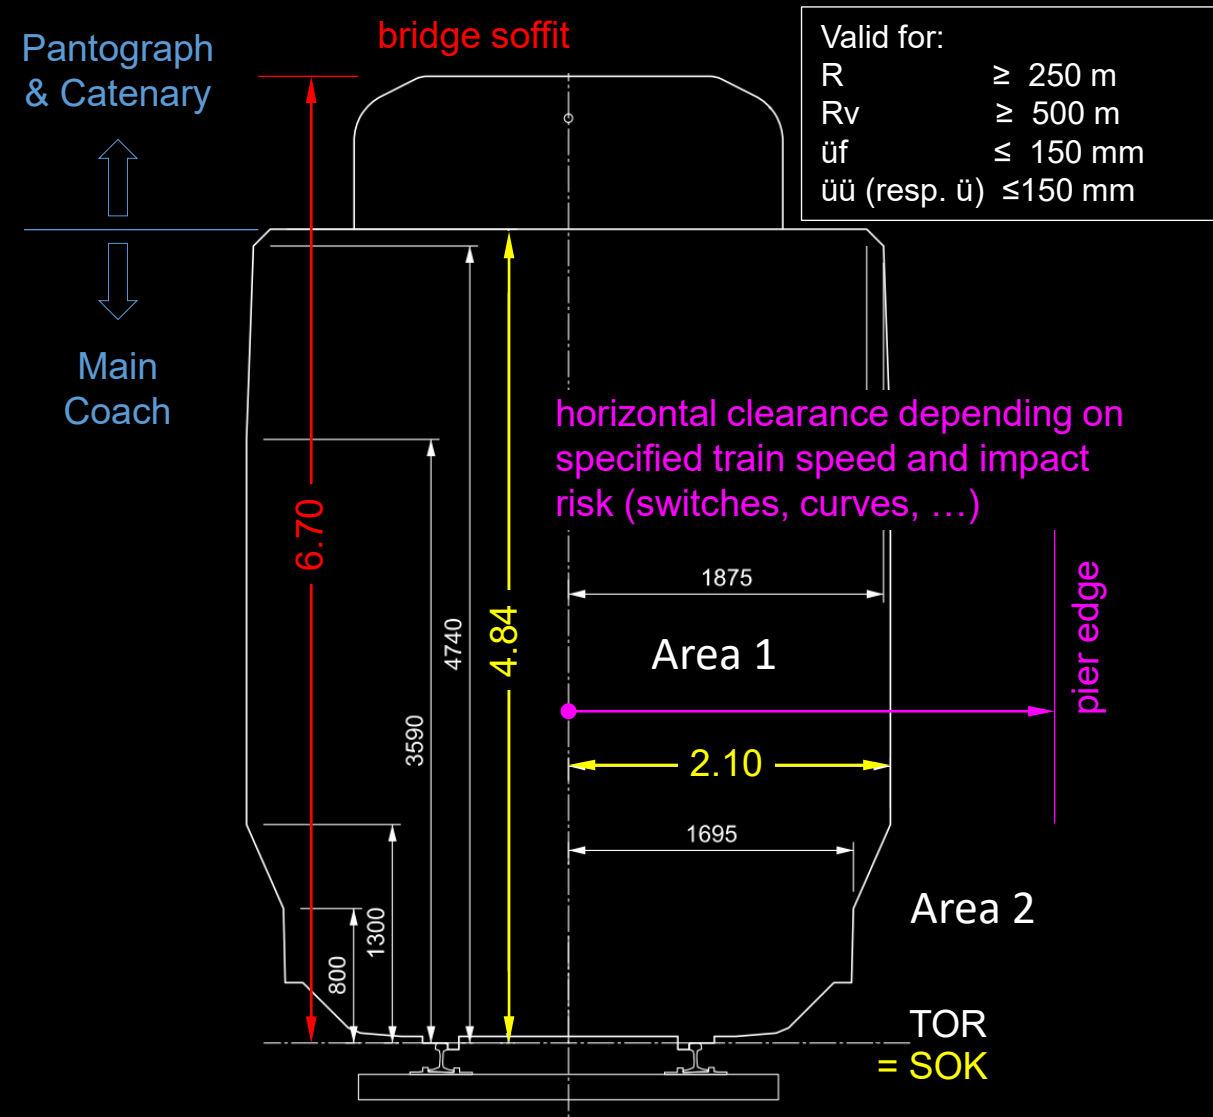

# Design Criteria – Structural Safety and Serviceability: Clearances

## Clearances - Swiss Standards

- BAV – Bundesamt für Verkehr

A-EBV

[Clearance Profile – Standard Gauge]

Clearance Profile EBV 4 (Normalspur):

Applicable for:


- New lines for the North-South routes Basel-Chiasso and Basel-Iselle
- New and extension lines with  $V > 160$  km/h

Note basic dimensions:

Area 1 height = 4.84 m }  
Area 1 width = 4.20 m } Dynamic approach

Compare to German Regulations (1892 – 1991):

Envelope height = 4.8 m }  
Envelope width = 4.0 m } Static approach

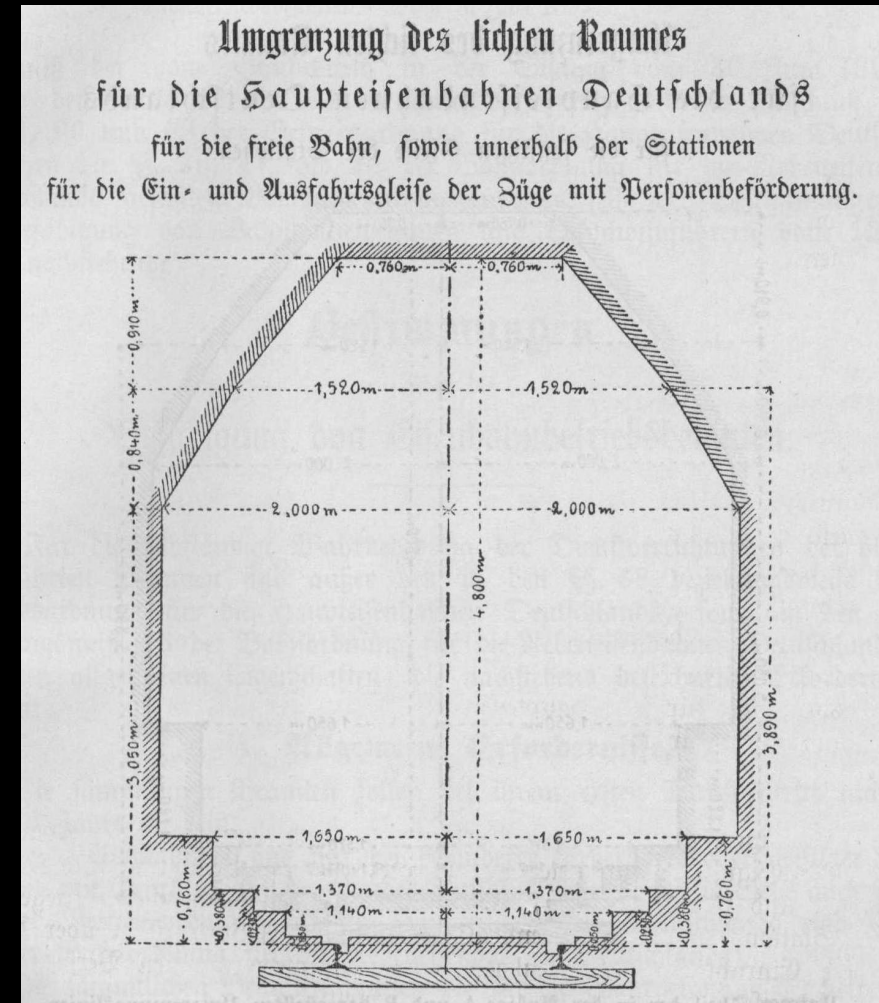

# Design Criteria – Structural Safety and Serviceability: Clearances

## Clearances - Swiss Standards

- BAV – Bundesamt für Verkehr

A-EBV

[Clearance Profile – Standard Gauge]

Clearance Profile EBV A (Meterspur):

Applicable for:

- Adhesion railways and funiculars without transporter wagons or trailers

Note basic dimensions:


Envelope height = 4.1 m

Envelope width = 3.3 m + 2e

where e accounts for radius of curvature, R

$$e = (25 \text{ m}^2) / R$$

Larger vertical clearances (e.g. 5.90 m RhB) are requested for new bridges. Lower clearances can often be agreed (extra cost for catenary adjustments)

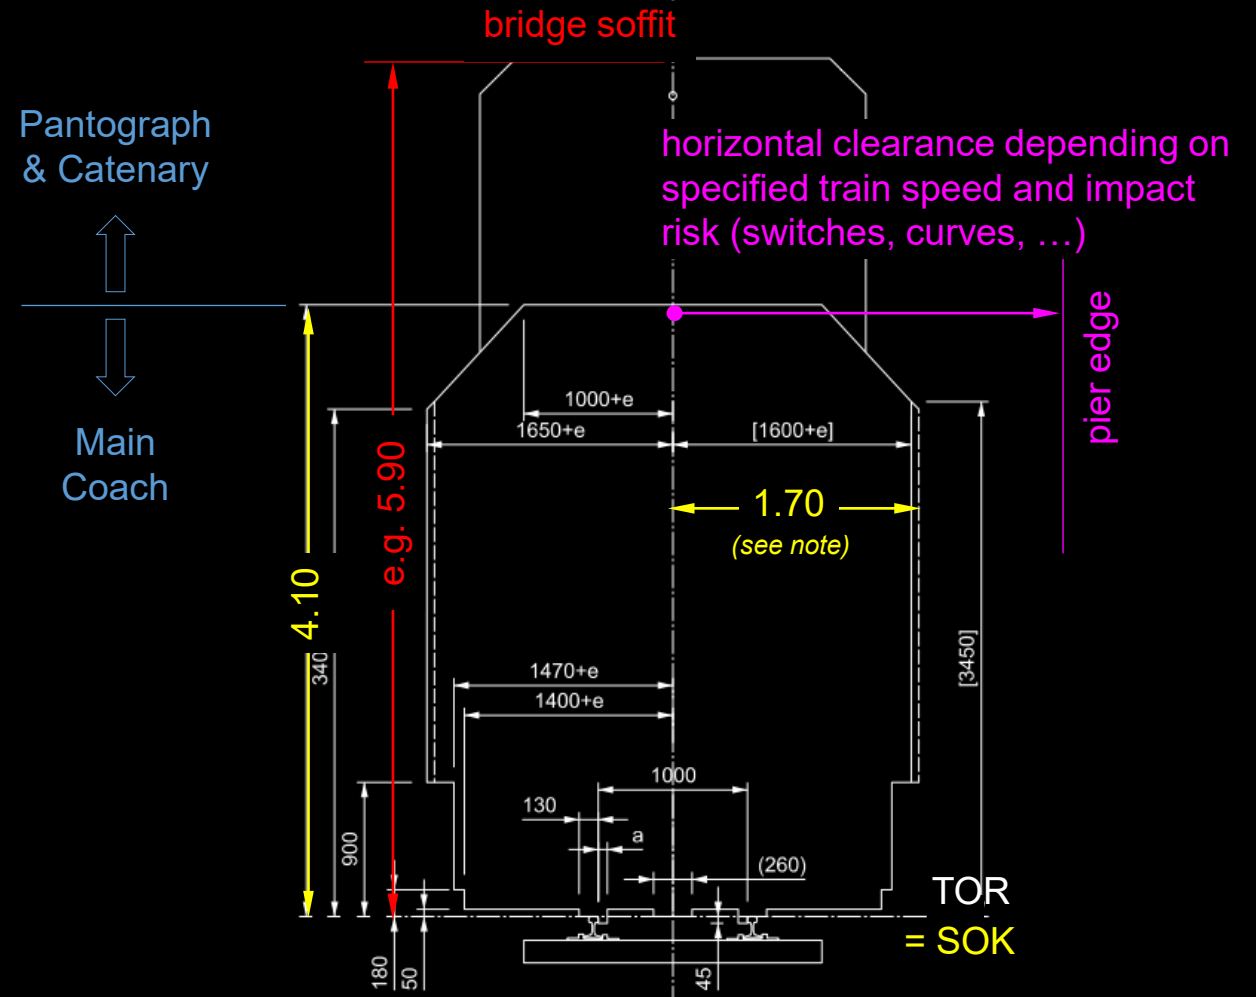

# Design Criteria – Structural Safety and Serviceability: Clearances


## Clearances - Swiss Standards

- VSS – Standards 40 201 & 40 202

Typical Geometric Profiles

### Clearance Profile for Pedestrians

- Varies based on the expected amount of pedestrians and the desired comfort level
- Normal range of motion:  
Horizontal / Vertical = 10 cm
- Safety margin:  
Horizontal = 10 cm  
Vertical = 25 cm
- Next to walls, buildings, etc. an additional clear width of 25 cm is required (50 cm for lanes with heavy traffic)

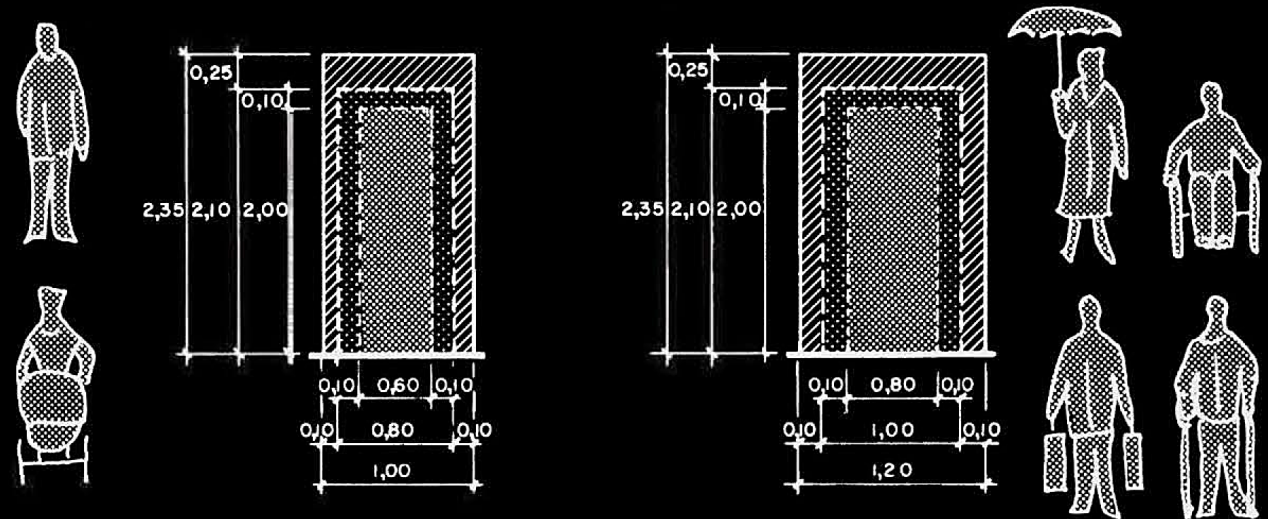

### Basic dimensions of users

- Pedestrians with or without strollers
- Pedestrians with luggage, umbrella; wheelchair

### Width (m)

- 0.60
- 0.80

### Height (m)

- 2.00
- 2.00



# Design Criteria – Structural Safety and Serviceability: Clearances


## Clearances - Swiss Standards

- VSS – Standards 40 201 & 40 202

Typical Geometric Profiles

### Clearance Profile for Light Two-Wheelers

- Generally assuming:
  - Radius of curvature  $> 80$  m (i.e. straight)
  - Grade  $< 4\%$
- Normal range of motion:
  - Horizontal = 10 cm (20 – 40 cm if Grade  $\geq 4\%$ )
  - Vertical = 0 – 30 cm
- Safety margin:
  - Horizontal = 20 cm
  - Vertical = 25 cm
- Next to walls, buildings, etc. an additional clear width of 25 cm is required

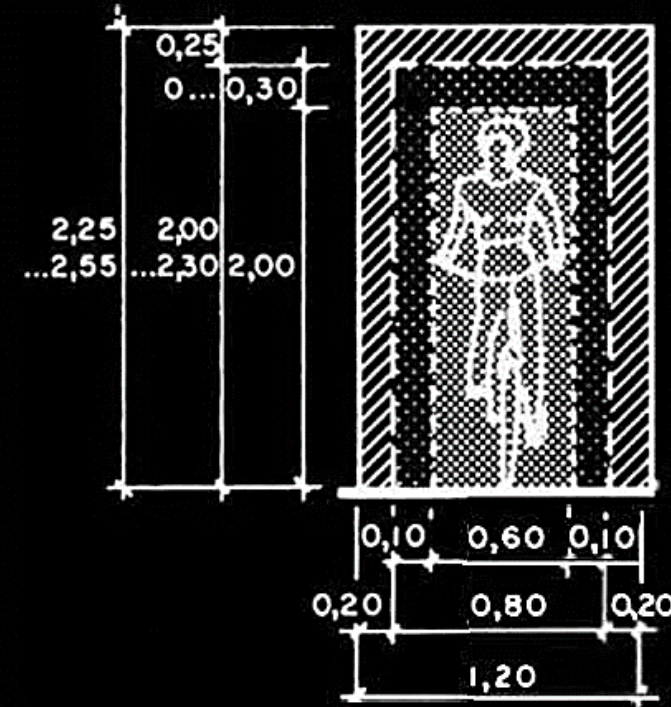

Basic dimensions of users	Width (m)	Height (m)
Light two-wheeler	0.60	2.00

*For  $R > 80$  m: When cornering, because of their inclined position, light two-wheelers require a greatly increased range of motion.*

# Design Criteria – Structural Safety and Serviceability: Clearances


## Clearances - Swiss Standards

- VSS – Standards 40 201 & 40 202

Typical Geometric Profiles

### Clearance Profile for Passenger Cars & Vans

- The range of motion depends on speed
- Normal range of motion:
  - Horizontal = 0 – 40 cm
  - Vertical = 0 – 20 cm
- Safety margin:
  - Horizontal / Vertical = 20 cm
- Values apply to straight sections
- In the case of tight curves, additional clearance for the heights is necessary for long vehicles

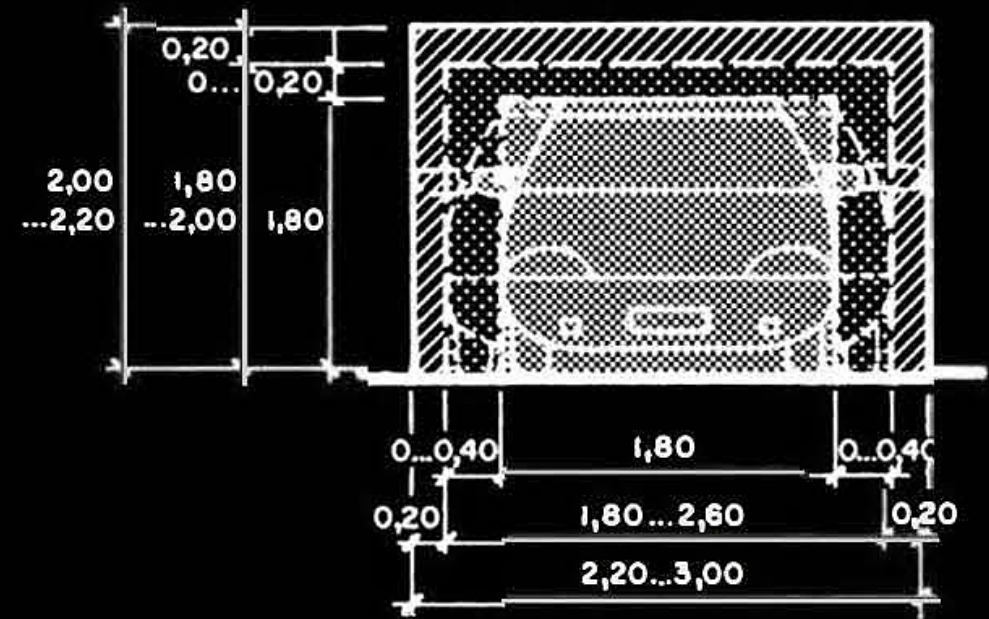

Basic dimensions of users	Width (m)	Height (m)
Passenger cars	1.80	1.80
Delivery vans, minibuses and mobile homes (< 3.5 t)	2.10 – 2.20	2.70 – 3.00

# Design Criteria – Structural Safety and Serviceability: Clearances


## Clearances - Swiss Standards

- VSS – Standards 40 201 & 40 202

Typical Geometric Profiles

### Clearance Profile for Heavy Trucks & Buses

- The range of motion depends on speed
- Normal range of motion:
  - Horizontal = 0 – 40 cm
  - Vertical = 0 – 30 cm
- Safety margin:
  - Horizontal = 30 cm
  - Vertical = 20 cm
- These values apply to straight sections. In the case of tight curves, additional clearance for the heights is necessary for long vehicles.
- The cross slope must also be taken into account

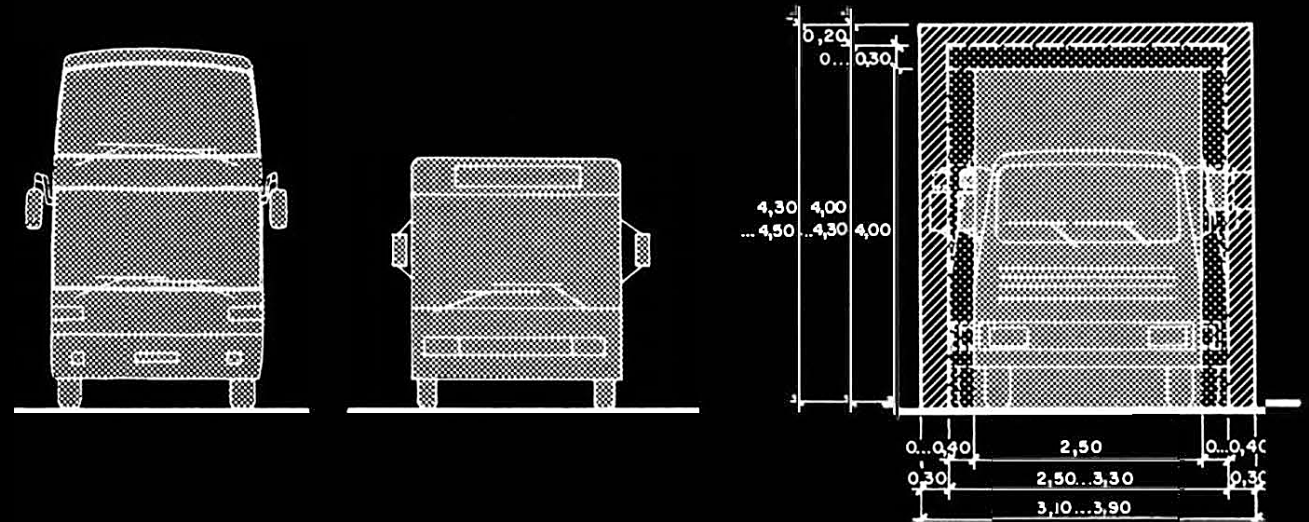

### Basic dimensions of users

Heavy trucks & buses

Width (m)

2.50


Height (m)

4.00

Agricultural vehicles

2.50 – 3.50

3.00 – 4.00

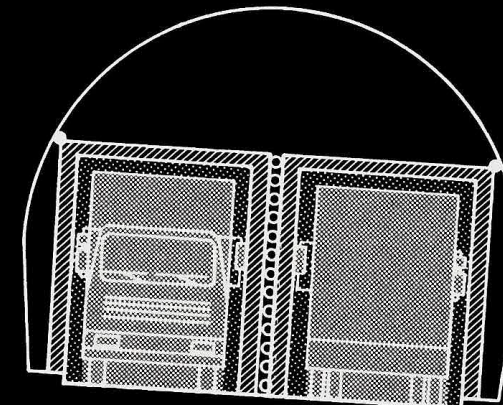


# Design Criteria – Structural Safety and Serviceability: Clearances

## Clearances - Swiss Standards

- VSS – Standards 40 201 & 40 202  
Typical Geometric Profiles

### Clearance Profile Example

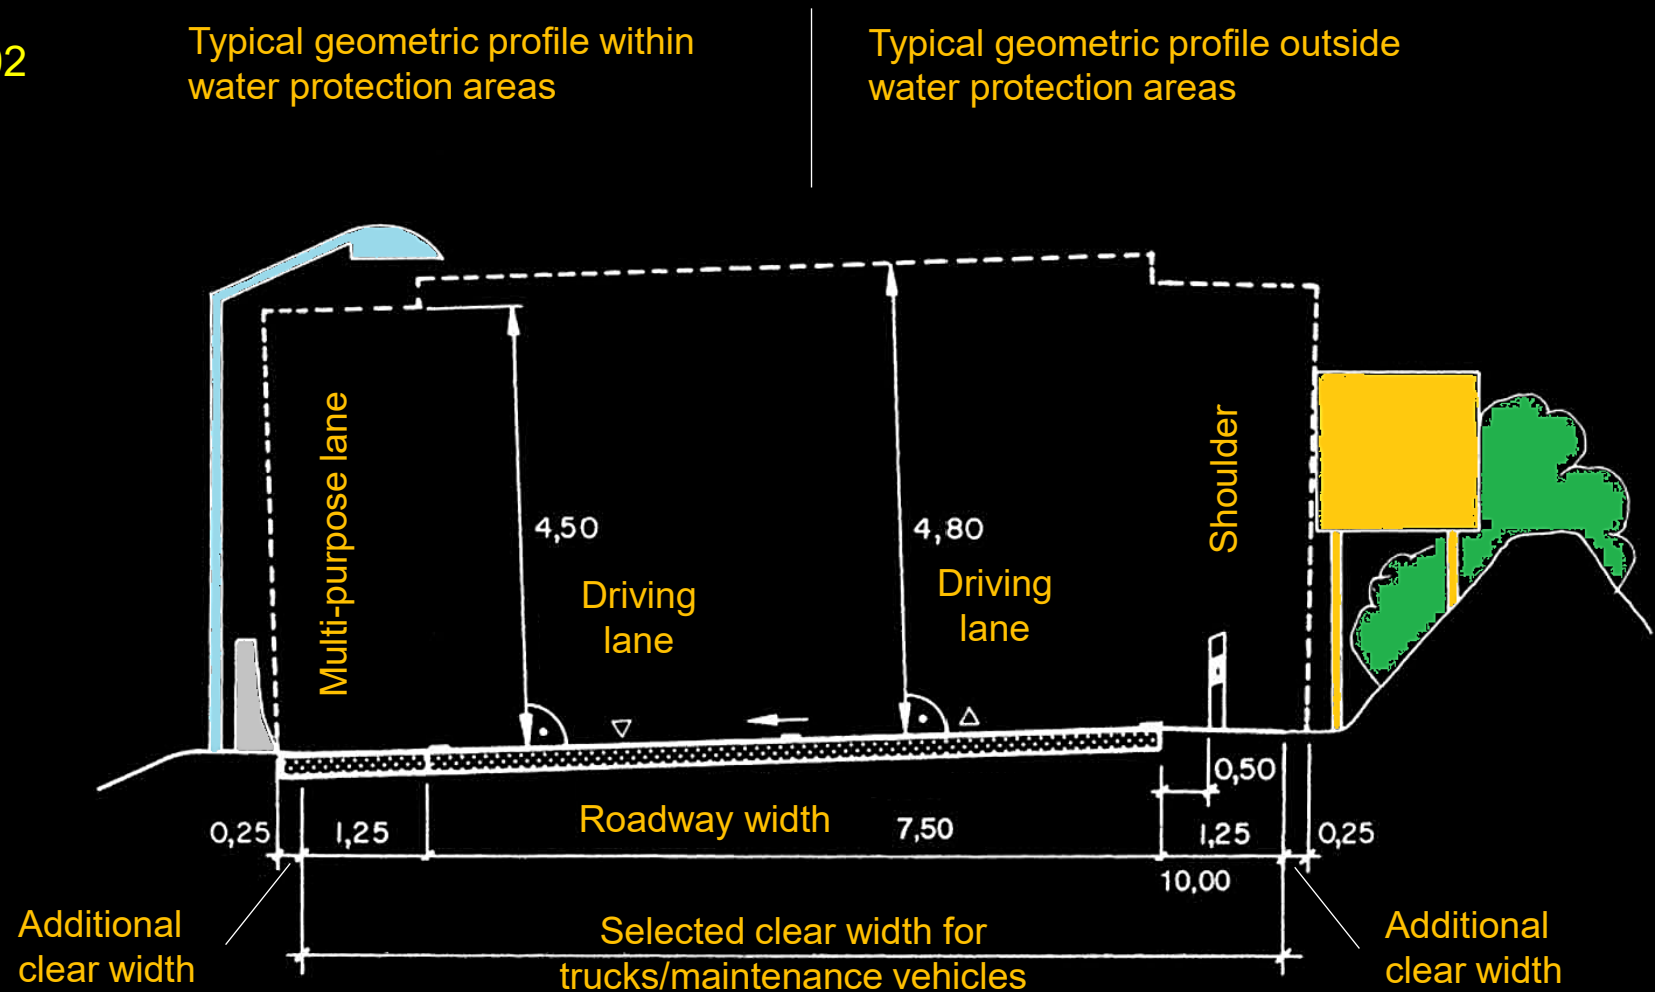

# Design Criteria – Structural Safety and Serviceability: Clearances


## Clearances - Swiss Standards

- **ASTRA – Guidelines 11001**

Typical Profiles – 1st and 2nd Class National Roads with direction separation

### Clearance profile requirements (free routes, bridges):

- **width of clearance profile:**
  - ... width required for the **vehicles** plus
  - ... **movement, overtaking and safety** margins
- **side safety margins** (0.30 m) extend beyond the edge of the road into the median or the shoulder
- **vertical clearance** of **4.50 m**:
  - ... account for cross slope, i.e.
  - ... measured at right angles to the road surface
  - ... increase to **4.90 m** under traffic sign structures
  - ... increase by  $\geq 0.10$  m (**min. 4.60 m**) under **overpasses** (deflections, reserve for future strengthening of superstructure / surfacing)

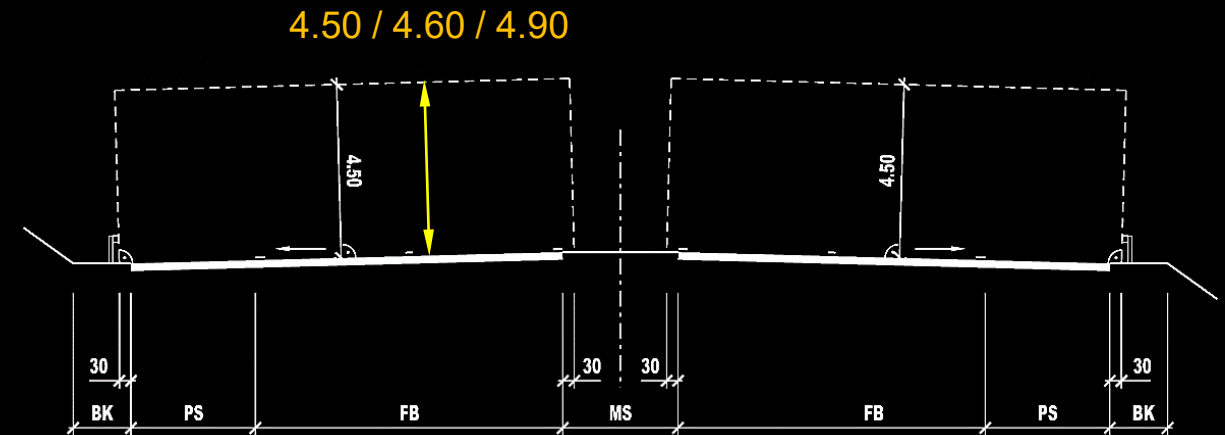

# Design Criteria – Structural Safety and Serviceability: Clearances

## Clearances - Swiss Standards


- **ASTRA – Guidelines 11001**

Typical Profiles – 1st and 2nd Class National Roads with direction separation


2 lanes / direction



3 lanes / direction

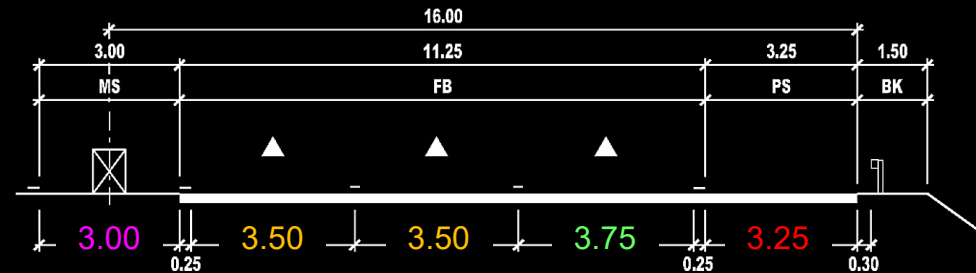

4 lanes / direction

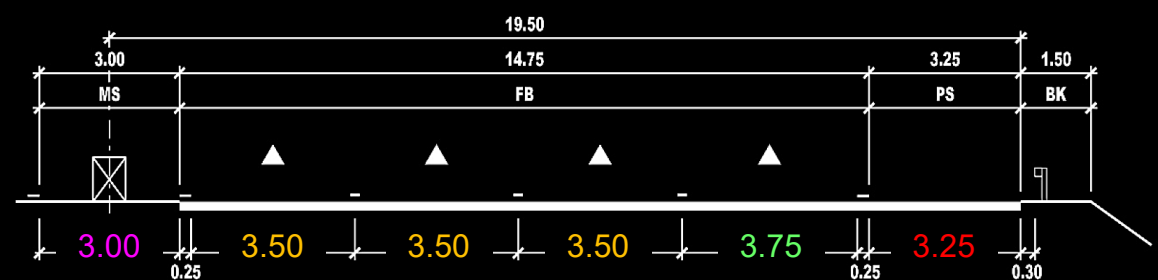

Lane widths in new motorways (see figures at right):

- 2 lanes: 3.75 m per lane
- > 2 lanes: right lane 3.75 m, other lanes 3.50 m
- emergency lane 3.25 m
- directional separation 3.00 m

Minimum lane widths in rehabilitation (not illustrated):

- 2 lanes: 3.50 m per lane
- >2 lanes: left lane 3.25 m, other lanes 3.50 m
- Emergency lane 2.50 m

# Design Criteria – Structural Safety and Serviceability: Clearances

## Clearances

- **Reduced (Substandard) Clearances**
  - in certain cases, bridge structures do not provide the required standard clearances due to ... site constraints  
... change of use, and/or standard requirements
  - This should be **avoided whenever possible**. Even the most high-tech warning measures are typically **ineffective** in preventing accidents



# Design Criteria – Structural Safety and Serviceability: Clearances

## Clearances

- **Reduced (Substandard) Clearances**
  - Accidents due to inadequate clearances may result in
    - ... damage to the structure and/or vehicle
    - ... personal injury/death
    - ... bridge/highway closures and traffic disruptions
  - In extreme cases, inadequate clearances may result in collapse of the bridge

### **Example:** I-5 Skagit River Bridge, WA, USA (1955)

- On May 23, 2013, a span of the bridge carrying Interstate 5 over the Skagit River in the U.S. state of Washington collapsed
- The cause of the catastrophic failure was determined to be an oversize truck striking several of the bridge's overhead sway frames, leading to an immediate collapse of the northernmost span







# Design Criteria – Structural Safety and Serviceability: Clearances

## Clearances

- **Reduced (Substandard) Clearances**

**Example:** I-5 Skagit River Bridge, WA, USA (1955)

- Variable clearance to sway frames across width.
- **Oversize truck** with height of 4.9 m.
- Pilot car failed to identify clearance issue.
- Bridge span collapse was initiated when the oversize truck hit Sway Frame 4, causing horizontal deformation of the adjacent vertical member. This deformation pulled the attached upper chord member downward, causing instability in the upper chord.
- Due to the non-redundant structural system, failure of the upper chord led to collapse of the truss span.

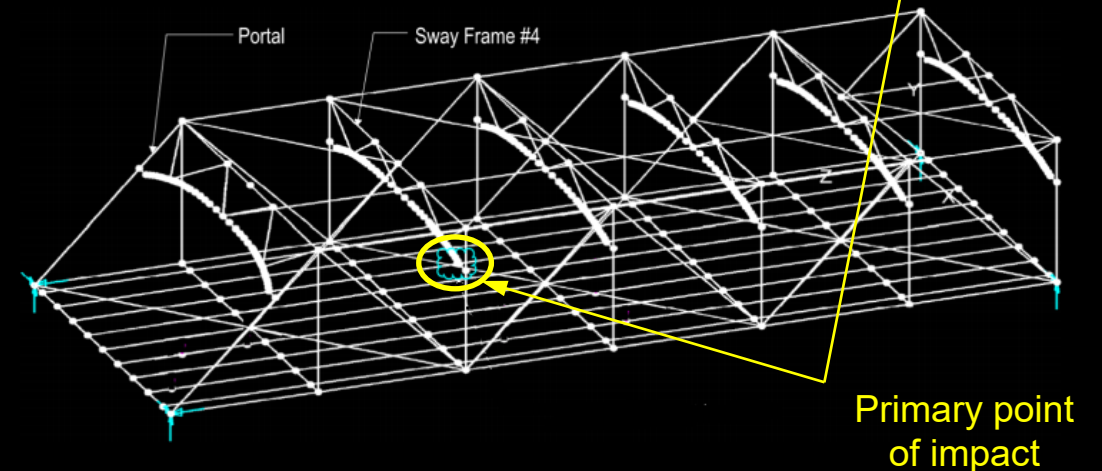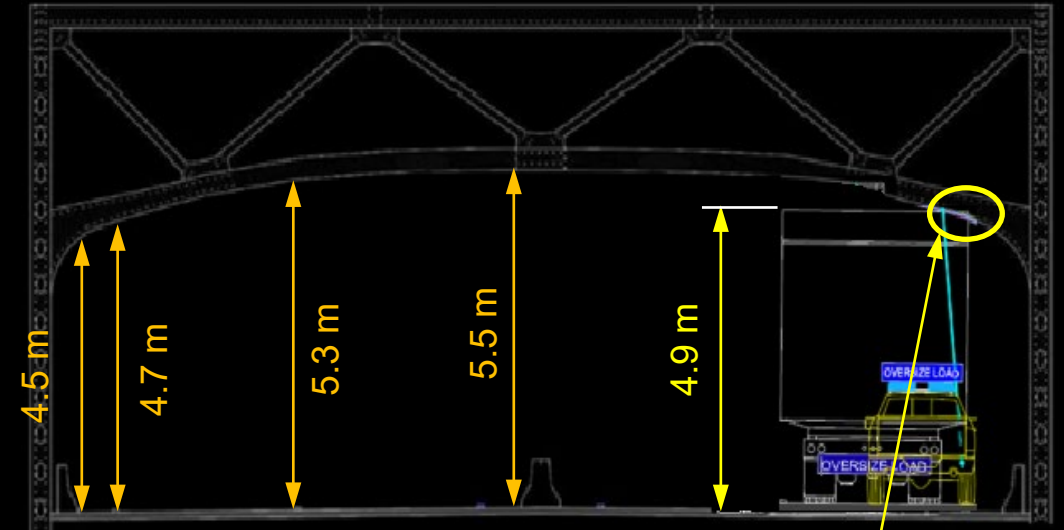


# Design Criteria – Structural Safety and Serviceability: Clearances

## Clearances

- Reduced (Substandard) Clearances


Other Examples of Oversize Combination Vehicles:

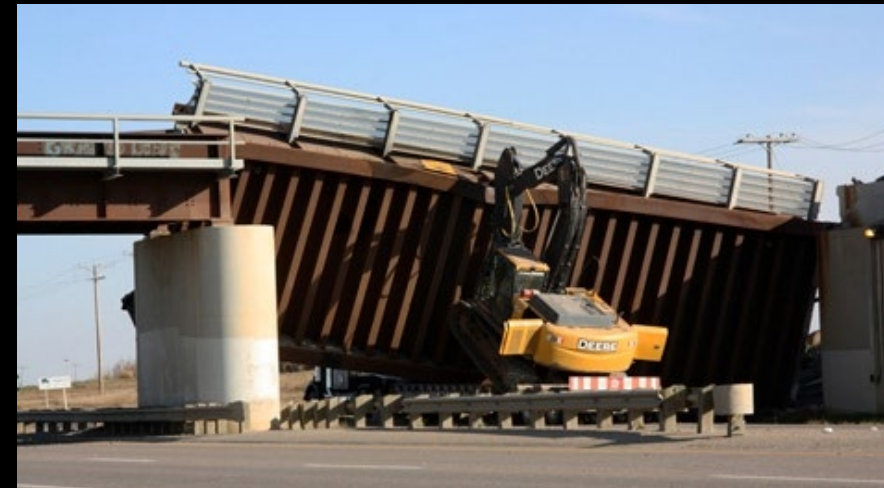

# Design Criteria – Structural Safety and Serviceability: Clearances

## Clearances

- Reduced (Substandard) Clearances  
Local Examples of Oversize Combination Vehicles:




# Design Criteria – Structural Safety and Serviceability: Clearances

## Clearances

- **Change in clearance requirements**  
Over the service life of a bridge the clearance requirements may change (usually increase).

**Example:** Bayonne Bridge, NY & NJ, USA (1931)

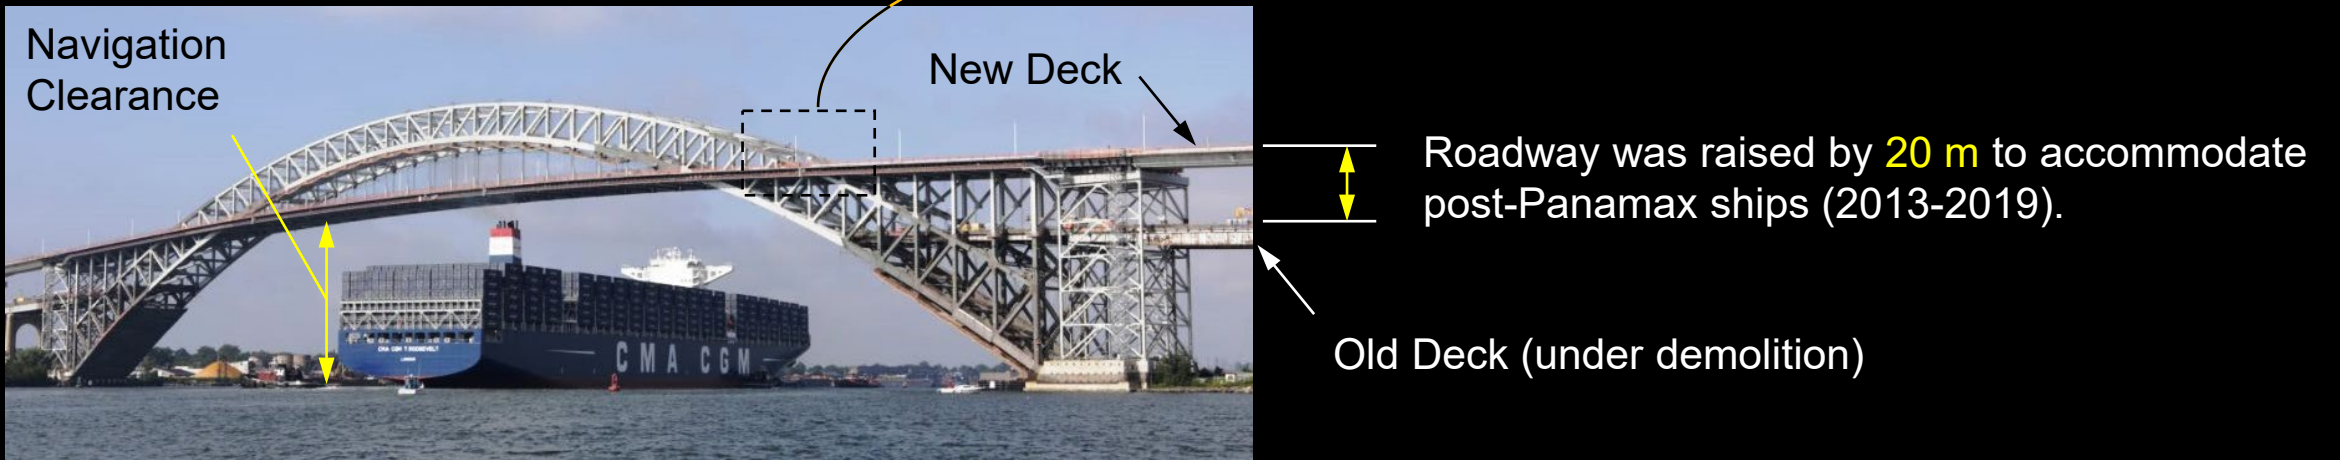

# Conceptual Design

Design Criteria – Durability

Entwurfskriterien – Dauerhaftigkeit


# Design Criteria – Durability

## General aspects

Durability is essential and needs to be **accounted for from the conceptual design stage to the end of construction.**

Specific aspects (relevant for all construction materials):

- **Avoid joints** (→ support and articulation)
- **Protect structure from chloride attack**
  - ... reliable waterproofing and controlled drainage of decks
  - ... minimise exposed surfaces
- **Use proper materials**, for example
  - ... avoid weathering steel or timber in wet zones
  - ... use freeze-thaw resistant concrete
- **Carefully detail the entire structure**, for example
  - ... avoid horizontal surfaces (puddles, “stehendes Wasser”)
  - ... provide gutters («Tropfkanten»)
- **Facilitate access** for inspection and maintenance e.g. to:
  - ... interior of box-girders ( $h \geq 1.50$  m)
  - ... expansion joints and bearings (maintenance chamber)
- **Ensure quality during execution** – the proper execution of a detail is at least as important as choosing the right detail

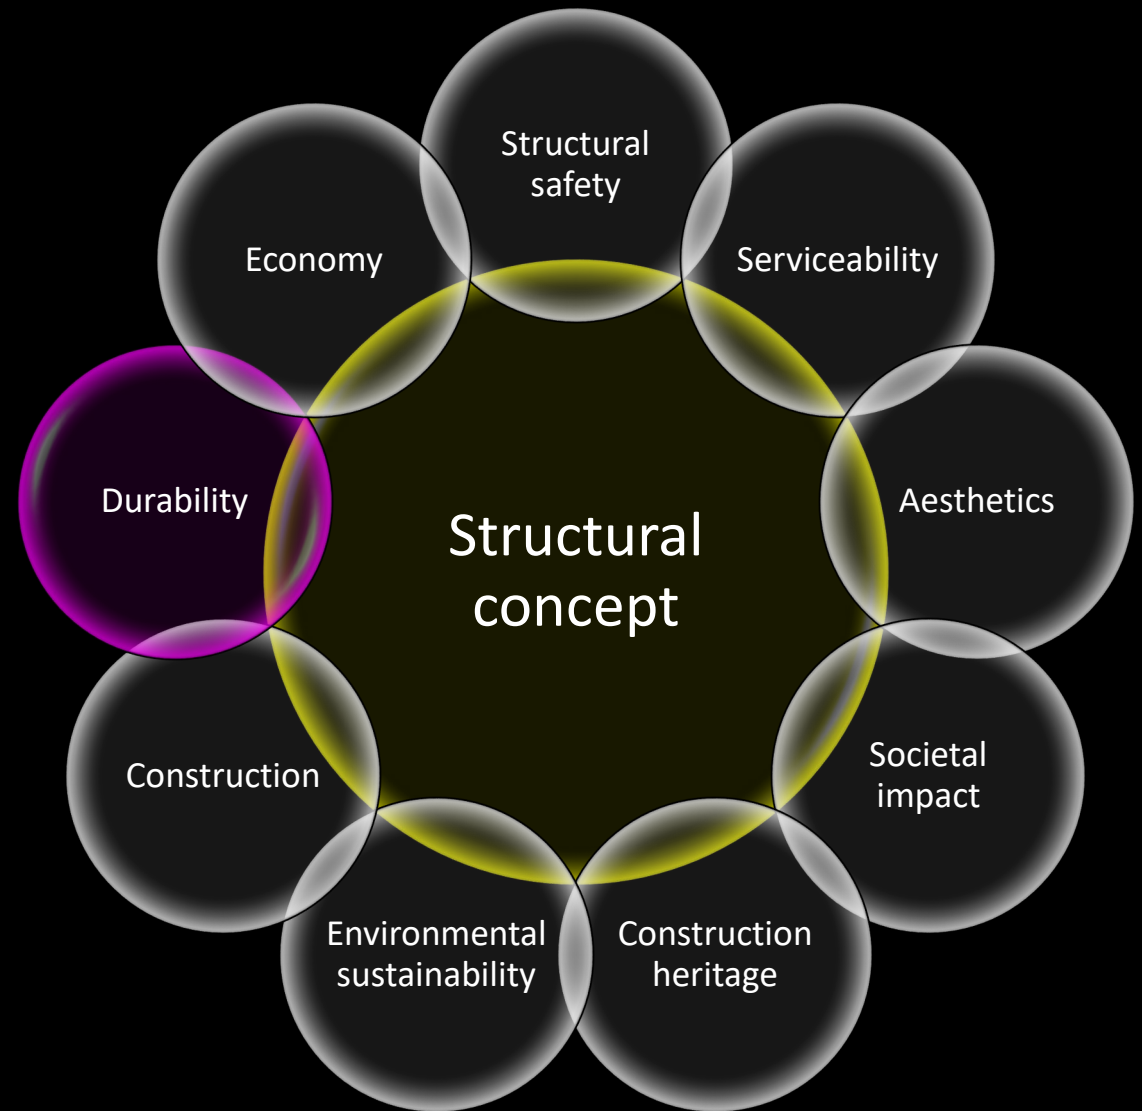

# Design Criteria – Durability

## General aspects

Durability is essential and needs to be **accounted for from the conceptual design stage to the end of construction**.  
Specific aspects (relevant for all construction materials):

- **Avoid joints** (→ support and articulation)
- **Protect structure from chloride attack**
  - ... reliable waterproofing and controlled drainage of decks
  - ... minimise exposed surfaces
- **Use proper materials**, for example
  - ... avoid weathering steel or timber in wet zones
  - ... use freeze-thaw resistant concrete
- **Carefully detail the entire structure**, for example
  - ... avoid horizontal surfaces (puddles, “stehendes Wasser”)
  - ... provide gutters («Tropfkanten»)
- **Facilitate access** for inspection and maintenance e.g. to:
  - ... interior of box-girders ( $h \geq 1.50$  m)
  - ... expansion joints and bearings (maintenance chamber)
- **Ensure quality during execution** – the proper execution of a detail is at least as important as choosing the right detail




# Design Criteria – Durability

## Concrete

- Specify concrete with adequate **freeze-thaw resistance** depending on exposure classes XF (see figure)
- Ensure **dense cover concrete** (air permeability)
- Make sure that **post-tensioning ducts are properly grouted**
- **Full prestressing** (avoid cracks) at least for permanent load
- Specify adequate **concrete cover**, depending on exposure classes XC, XD and XA (see table and figure) for lifespan of 80... 100 years:

Exposure classes / clear cover (ASTRA RL 12001)		reinforcement cover [mm]	prestressing cover [mm]
XC: Carbonation	XC1-4	40	50
XD: Chloride attack	XD1	40	50
	XD2,3	55	65
XA: Chemical attack (Astra: incl. chlorides)	XA1,2	55	65
	XA3	70	80

(\*) increase by 10 mm if concrete permeability is high for XC3,4 and XD

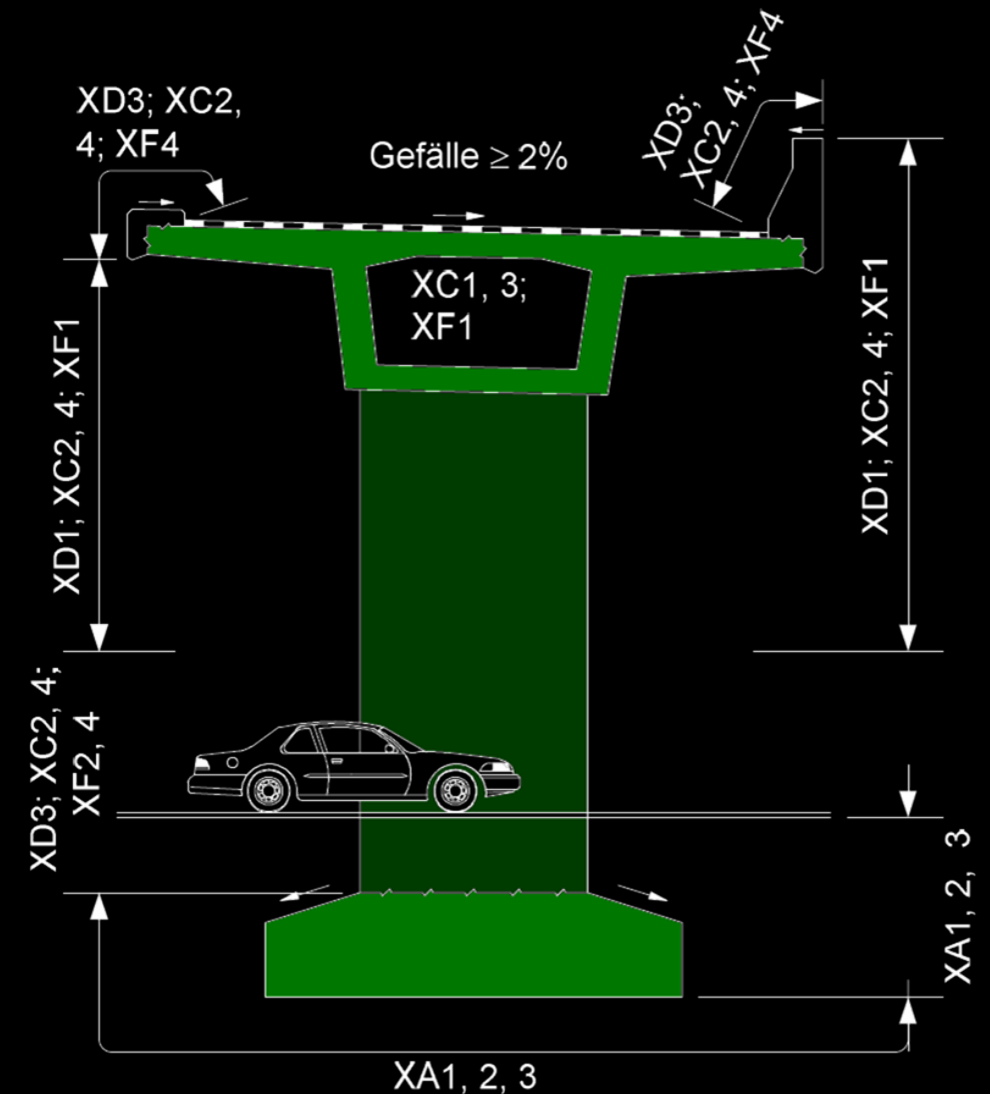



# Design Criteria – Durability

## Steel (conventional)

- Ensure proper surface preparation (Sa 2½ or Sa3, edges)
- Apply coating in **workshop** (quality control, climate)
- Ensure **air-tightness of inaccessible elements** (inside box girders and closed profiles) or **provide dehumidification**
- **Protective coating** with adequate protection (category of corrosiveness, usually C3/C4 for bridges)
  - ... **conventional**, see table
  - ... **thermal spray zinc coating** («Spritzverzinkung») (instead of primer, intermediate + top coating as above)

Typical protective coating for CH steel bridges (SBB AQV 2007, category C4)		thickness [µm]
Primer (*) (base layer)	Two pack zinc epoxy / phosphate (2-K-Epoxidharz-Zinkstaub)	70
Intermediate coatings (2)	Two pack Epoxy MIO (**) (2-K-Epoxidharz-Eisenglimmer)	80
		80
Top coating	Two pack Polyurethane MIO (**) (2-K-Polyurethan-Eisenglimmer)	80

(\*\*) micaceous iron oxide (Eisenglimmer)



# Design Criteria – Durability

## Steel (with improved corrosion resistance)

- **Weathering steel** («Cortenstahl») may be used without protective coating in many cases / exposures since a **protective patina** will form if wet/dry phases alternate
- Weathering steel **should not be used**:
  - ... in **humid sites** (< 3 m above river, < 0.5 m above ground)
  - ... in case of **chloride exposure** (e.g. crossing a road with de-icing salt deployment, or site close to sea)
- Careful detailing is important for durability and appearance (avoid rust stains)
- **Stainless steel** is only used in exceptional cases due to the high initial cost



# Design Criteria – Durability

## Timber

- Durability is **problematic** since bridges cannot be completely protected from weathering and humidity
- Improvement by **impregnation** with chromated copper arsenate (CCA) or oil-tar creosotes (“carbolineum”), but **severe environmental issues** (prohibited in many countries)
- **Careful detailing** is important for durability and appearance (protect from weathering, avoid mould, use durable wood where available, see lower example)



# Design Criteria – Durability

## Stay cables

- Require **particular attention** since they are usually
  - ... important load-bearing elements
  - ... subjected to severe exposure
- Stays of **early cable stayed bridges** had limited durability
- Modern **stay cables** are high-tech, durable components (see image on next slide):
  - ... **individually encapsulated** (sheathed) strands
  - ... **galvanised** or epoxy-coated strands
  - ... **replaceable** strands and cables (under traffic)
  - ... **dehumidification** of ducts (in harsh exposure, e.g. marine environment)



# Design Criteria – Durability

## Compatible with modern construction methods

Compact anchorages fully prefabricated in workshop, no anchorage component assembly on the deck, single strand installation with light equipment, easy force monitoring and adjustment.

## Full encapsulation

Each strand separately protected inside the anchorage.

## Increased corrosion protection

Factory-applied individual protection treatment, up to 100 years design life in the most aggressive environments.

## Economical

Faster installation and erection cycles. Reduced maintenance.

## Increased stay anchorage protection

Deviator placed in the guide pipe provides an additional level of protection by filtering cable bending stresses before they reach the anchorage.

## Versatile


Designed to receive in the future vibration damping systems (friction dampers) if necessary.

## High fatigue resistance

200 MPa with an upper load of 45% of the stay capacity over  $2 \times 10^6$  load cycles; excellent ultimate resistance after fatigue testing (min. 95% of the specified stay capacity).

## Replaceable strands

Ability to remove and to replace individual strands on demand.

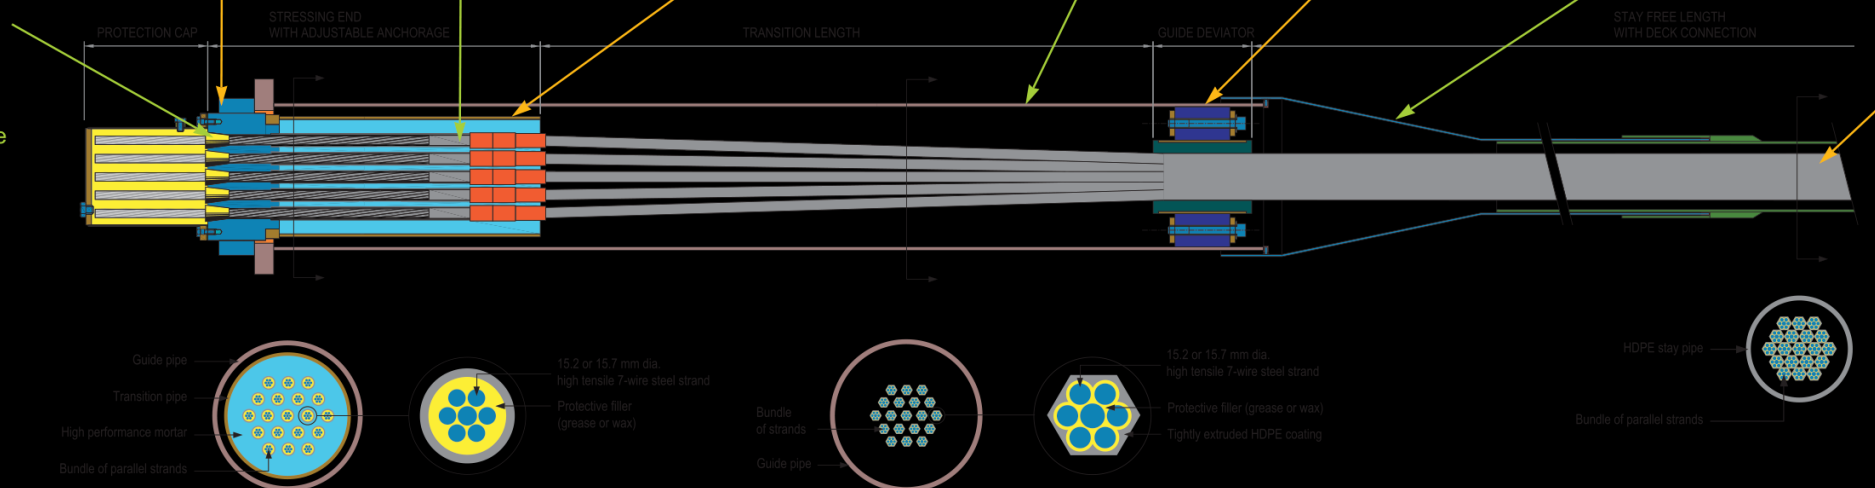


# Conceptual Design

Design Criteria – Environmental sustainability  
Entwurfskriterien – Ökologische Nachhaltigkeit

# Design Criteria – Environmental sustainability

## General aspects

- **Environmental sustainability** is a **decisive design criterion**
- Ensure **respect of environmental legislation** by accounting for related aspects in early design stages
- **Longer bridges** than strictly necessary may be required to ... avoid nature reserves and habitats of protected species ... protect ecologically important river banks and ensure connectivity along these (and along other obstacles)
- **Longer river spans** may be economical if **no temporary dams** facilitating access for the construction of **river piers and their foundations** are prohibited
- **Birds** are another important criterion, as they ... use **rivers** (obstacles crossed by bridges) as **routes** ... are **attracted by bright lights** on bridges ... **hit thin elements** of the bridge structure in poor weather  
→ **Cable-supported structures** require special measures or are even prevented near important bird habitats

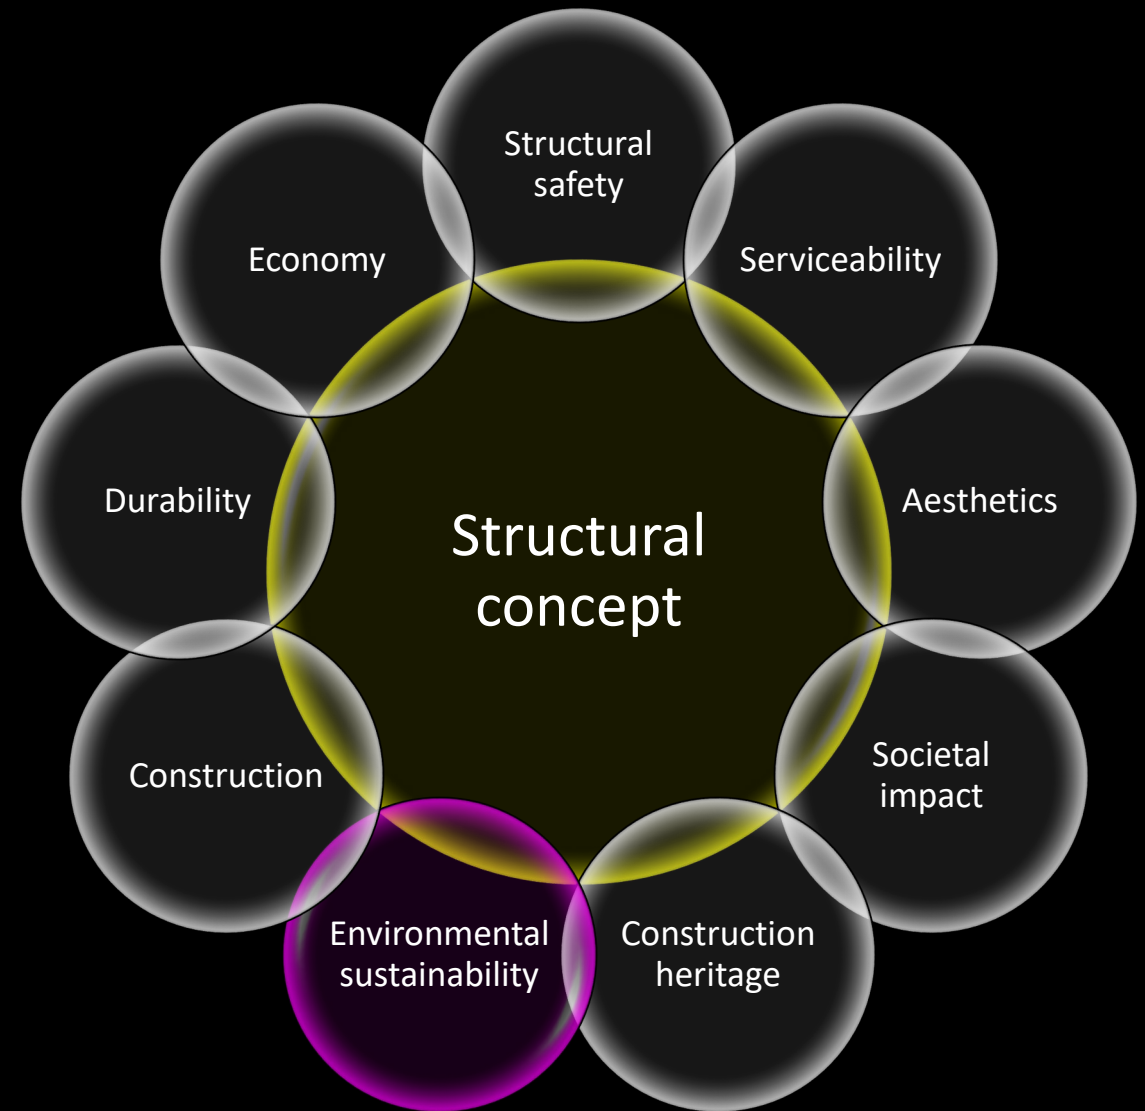

# Design Criteria – Environmental sustainability

## Environmental impact of construction

- **Negative environmental impact** must also be minimised during construction
  - ... building piers and foundations from water rather than temporary dam (see previous slide)
  - ... avoid spawning season of fish and frogs
  - ... avoid periods where flood events are expected

## Compensation measures

- **Ecological compensation measures** are often provided in order to mitigate negative environmental impacts, e.g.
  - ... renaturation of built-up banks
  - ... planting of native vegetation
  - ... providing nesting aids (for birds or bats)
  - ... building support structures for fish and frog spawn

## Link to economy and structural efficiency

- **Minimisation of material use and emissions** are important for environmental sustainability as well as for economy. They are best achieved by structural efficiency.





# Conceptual Design


Design Criteria – Economy

Entwurfskriterien – Wirtschaftlichkeit

# Design Criteria – Economy vs Environmental sustainability

## Link between economy and environmental sustainability


- **Environmental protection** measures are often seen as a **cost driver** by construction industry
- While this partly applies, **economy** and **environmental sustainability** are also **related**: structurally efficient bridges minimise material use hence cost and emissions
- Unfortunately, **the link is loose** today **since construction materials are too cheap**, to the point where wasting material to reduce labour has become usual
- Hopefully, the **current trend towards reducing material consumption and greenhouse gas emissions** will reinforce the dependency of economy on structural efficiency, and hence, the connection between economy and environmental sustainability as well.

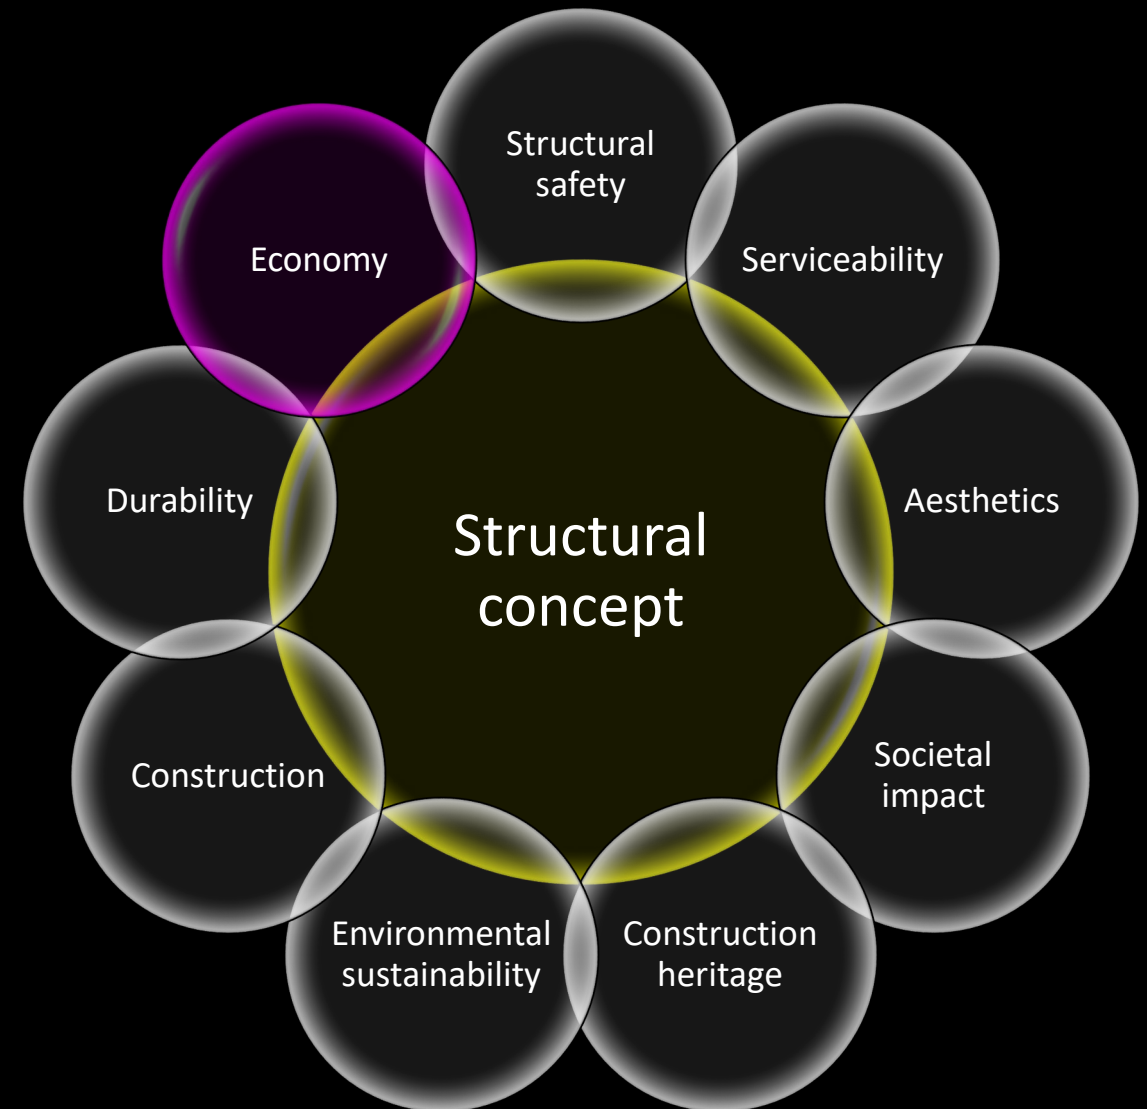

# Design Criteria – Economy

## General aspects of economy in bridge design


- Economy is even more relevant in bridge design than for building structures, since
  - bridges are usually **public works, paid by tax money**
  - in bridges, the **structure** makes up for **most of the total cost** (whereas in buildings they are a smaller part)
- Though clients are aware that **life-cycle costs** are relevant, decisions are regularly taken based **on initial cost** (particularly in design-build competitions)
- In order to achieve an economic (and eco-friendly) solution:
  - ... account for **construction method** in early design stage
  - ... use **economic, durable materials** (depending on site)
  - ... save materials by **maximising structural efficiency**
  - ... **simplify geometry** and seek repetitiveness

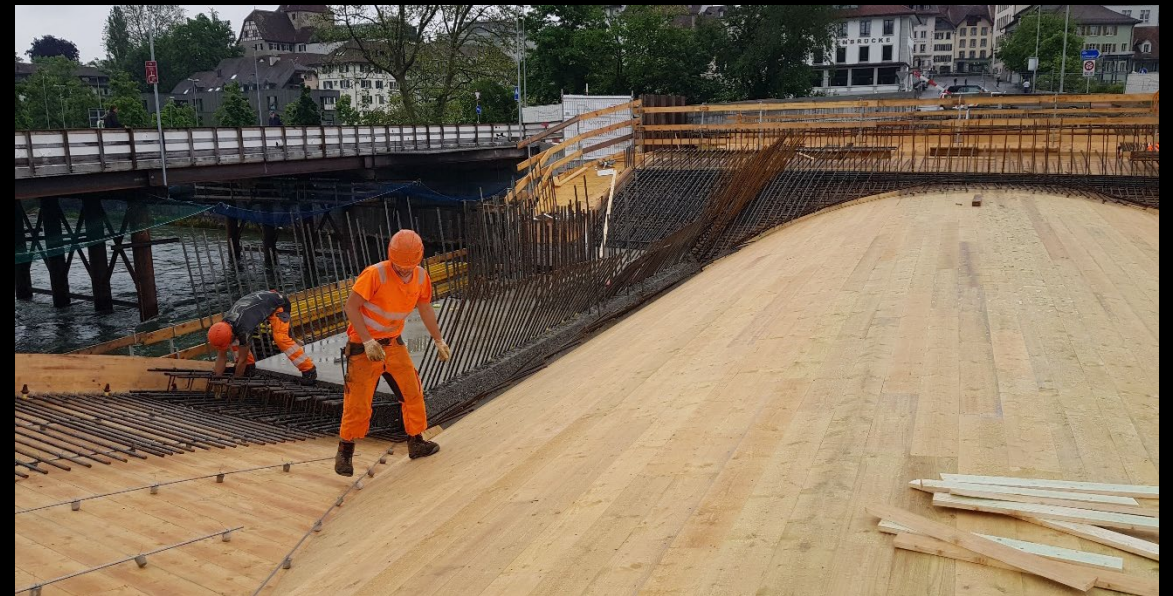

# Design Criteria – Economy


## Cost estimates

- Cost estimates are **essential to clients** (particularly in political decision processes)
- When comparing costs, make sure to compare **equivalent costs**, i.e., cost with or without:
  - ... client/owner overhead, design fees
  - ... bridge equipment (surfacing, drainage, ...)
  - ... percentages for unforeseen, VAT
- **Rough estimates** are possible based on the **cost per bridge surface** (e.g. ca. 3'500 CHF/m<sup>2</sup> **total cost** for Swiss road bridges, top figure) if reference objects with similar conditions are available regarding
  - ... location (cost varies strongly even among EU countries)
  - ... construction constraints (under traffic / over railway / ...)
- Cost estimates per m<sup>2</sup> **may be completely misleading** e.g. in footbridges (recent *fib* bulletin 2'000...25'000 CHF/m<sup>2</sup>)
- Better estimates are hardly possible by considering the share of individual components to the cost (bottom figure)

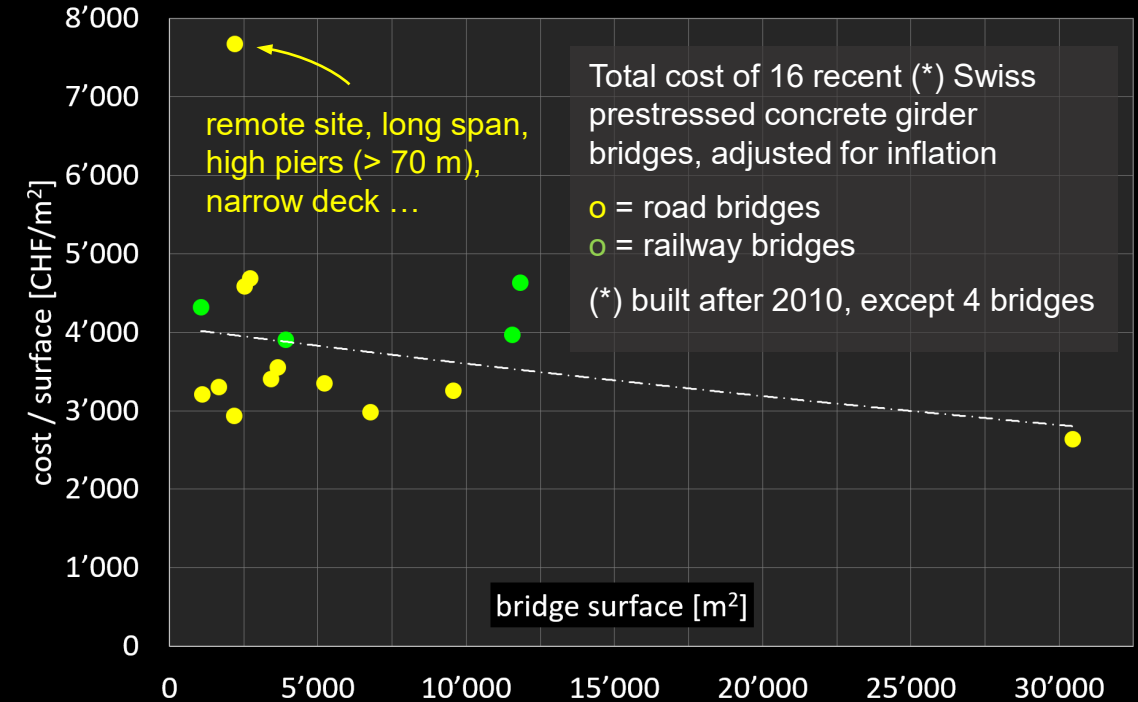

Contribution to total cost for 6 Swiss prestressed concrete girder bridges (commissioned after 2010)

- Site installations, various
- Scaffolds
- Concrete works (concrete, formwork, reinforcement, prestressing)
- Earth works, excavation pits, piles
- Waterproofing, surfacing, drainage

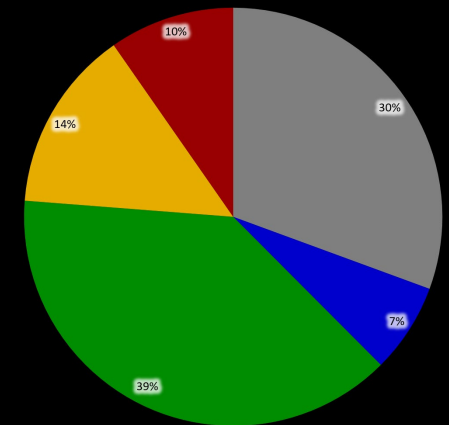

# Design Criteria – Economy

## Cost estimates

- More reliable cost estimates are possible once the project is defined such that the **main quantities can be determined and the costs evaluated by applying unit prices** based on local experience.
- The figure shows an example used in design competitions in CH, following NPK (“Normpositionenkatalog” / standardised position catalogue) main positions and quantities)
- **Contractor bids may differ significantly from cost estimates** not only due to uncertainty of the estimate, but also due to the current **construction market** (contractor in need for work or not)

<b>223</b>	<b>Belagsarbeiten</b>				<b>386'000</b>
	Beläge Brücke Fahrbahn	t	290	300	87'000
	Beläge Brücke Gehweg	t	94	350	32'900
	Beläge Strassen	t	1'400	190	266'000
<b>237</b>	<b>Kanalisationen und Entwässerung</b>				<b>36'000</b>
	Brückenentwässerung	gl	1	7'000	7'000
	Strassenentwässerung	gl	1	29'000	29'000
<b>241</b>	<b>Ortbetonarbeiten</b>				<b>1'979'000</b>
	Schalung Fundationen / Pfahlbankette	m <sup>2</sup>	170	80	13'600
	Schalung Widerlager	m <sup>2</sup>	150	120	18'000
	Schalung Pfeiler	m <sup>2</sup>	260	280	72'800
	Schalung Überbau	m <sup>2</sup>	1'360	140	190'400
	Schalung Überbau rund	m <sup>2</sup>	1'230	300	369'000
	<b>Schalung Total</b>				<b>663'800</b>
	Beton Fundationen / Pfahlbankette	m <sup>3</sup>	190	220	41'800
	Beton Widerlager	m <sup>3</sup>	110	220	24'200
	Beton Pfeiler	m <sup>3</sup>	220	240	52'800
	Beton Überbau	m <sup>3</sup>	1'240	300	372'000
	<b>Beton Total</b>				<b>490'800</b>
	<b>Bewehrungen</b>	<b>t</b>	<b>460</b>	<b>1'400</b>	<b>644'000</b>
	<b>Div. Kleinpositionen</b>	<b>gl</b>	<b>10%</b>	<b>1'799'000</b>	<b>179'900</b>
<b>244</b>	<b>Lager und Fahrbahnübergänge</b>				<b>16'000</b>
	Lager	St	4	4'000	16'000
<b>246</b>	<b>Spannsysteme</b>				<b>156'000</b>
	4 Kabel à 37x0.6" Litzen	m'	520	300	156'000
<b>247</b>	<b>Lehrgerüste</b>				<b>760'000</b>
	Montage Lehrgerüste	gl	1	570'000	570'000
	Absenken				

# Conceptual Design


Design Criteria – Construction  
Entwurfskriterien – Bauvorgang

# Design Criteria – Construction

## General aspects

### Construction includes:

- **Erection method (most relevant aspect)**
  - casting on falsework (conventional scaffolding)
  - lifting
  - balanced cantilevering
  - incremental launching
  - Movable Scaffold System (MSS)
  - ...
- **Type of production**
  - casting in-situ
  - prefabrication (precast elements)
- **Transport of materials or elements of the structure**
- **New technologies**
- ...

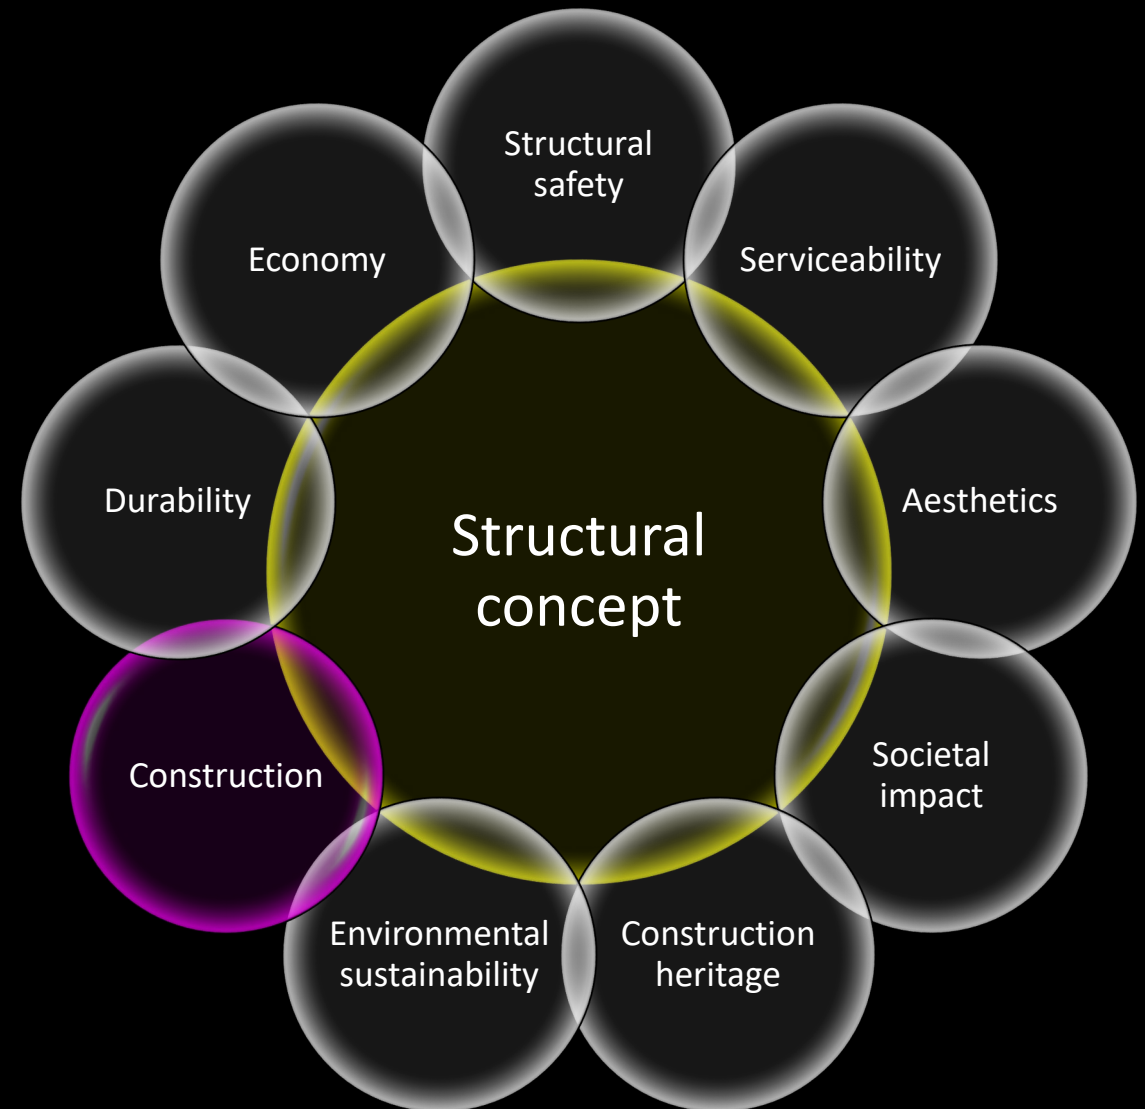


# Design Criteria – Construction

## General aspects

### Choice of the erection method

- The erection method is selected in an **iterative process** in order to conceive a structure that **optimises the given constraints**
- Efficient construction is only one of many criteria, but **affects many others** (see figure)
- The main factors in the iterative process are:
  - materials
  - typology of the bridge
  - topography
  - cost
- The erection method may significantly influence the dimensioning of the structure

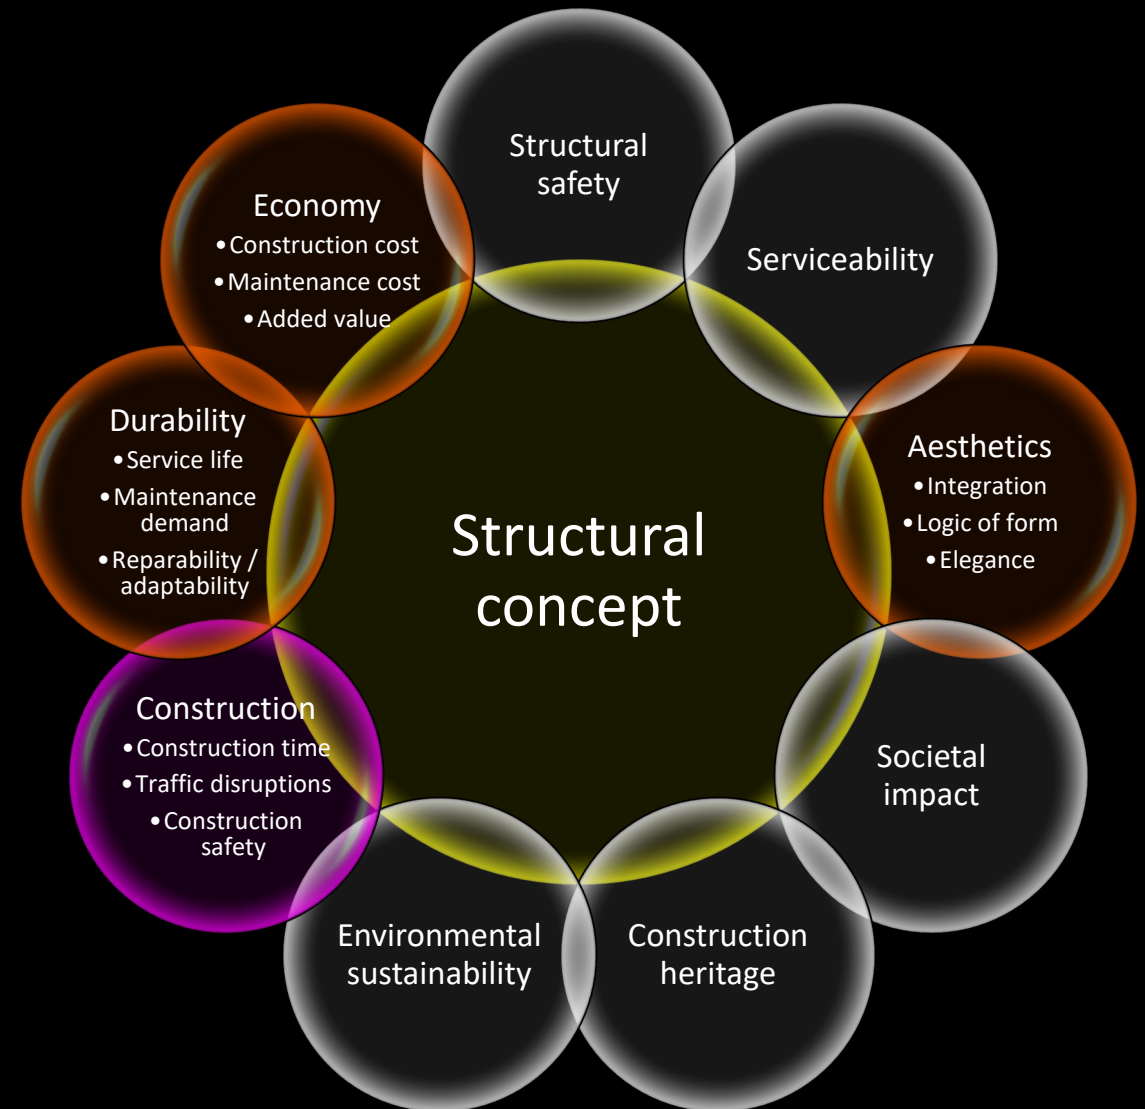




# Design Criteria – Construction

## General aspects

### Choice of the erection method

- The erection method is selected in an iterative process in order to conceive a structure that optimises the given constraints
- Efficient construction is only one of many criteria, but affects many others (see figure)
- The main factors in the iterative process are:
  - materials
  - typology of the bridge
  - topography
  - cost
- The erection method may **significantly influence the dimensioning** of the structure

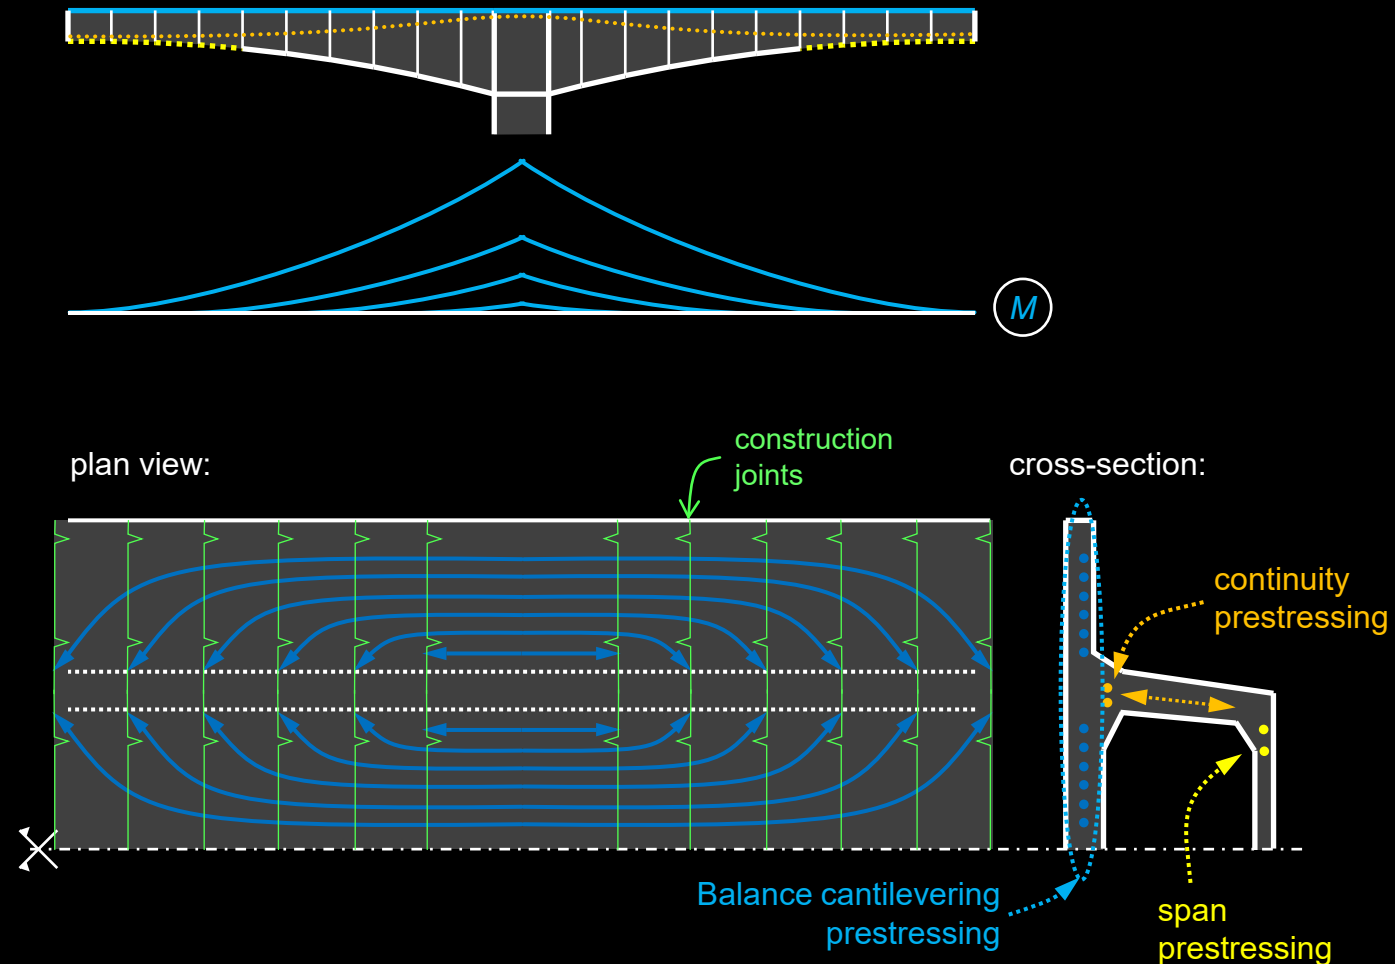


# Design Criteria – Construction

## General aspects

### Choice of the erection method


- The erection method is selected in an iterative process in order to conceive a structure that optimises the given constraints
- Efficient construction is only one of many criteria, but affects many others (see figure)
- The main factors in the iterative process are:
  - materials
  - typology of the bridge
  - topography
  - cost
- The erection method may **significantly influence the dimensioning** of the structure

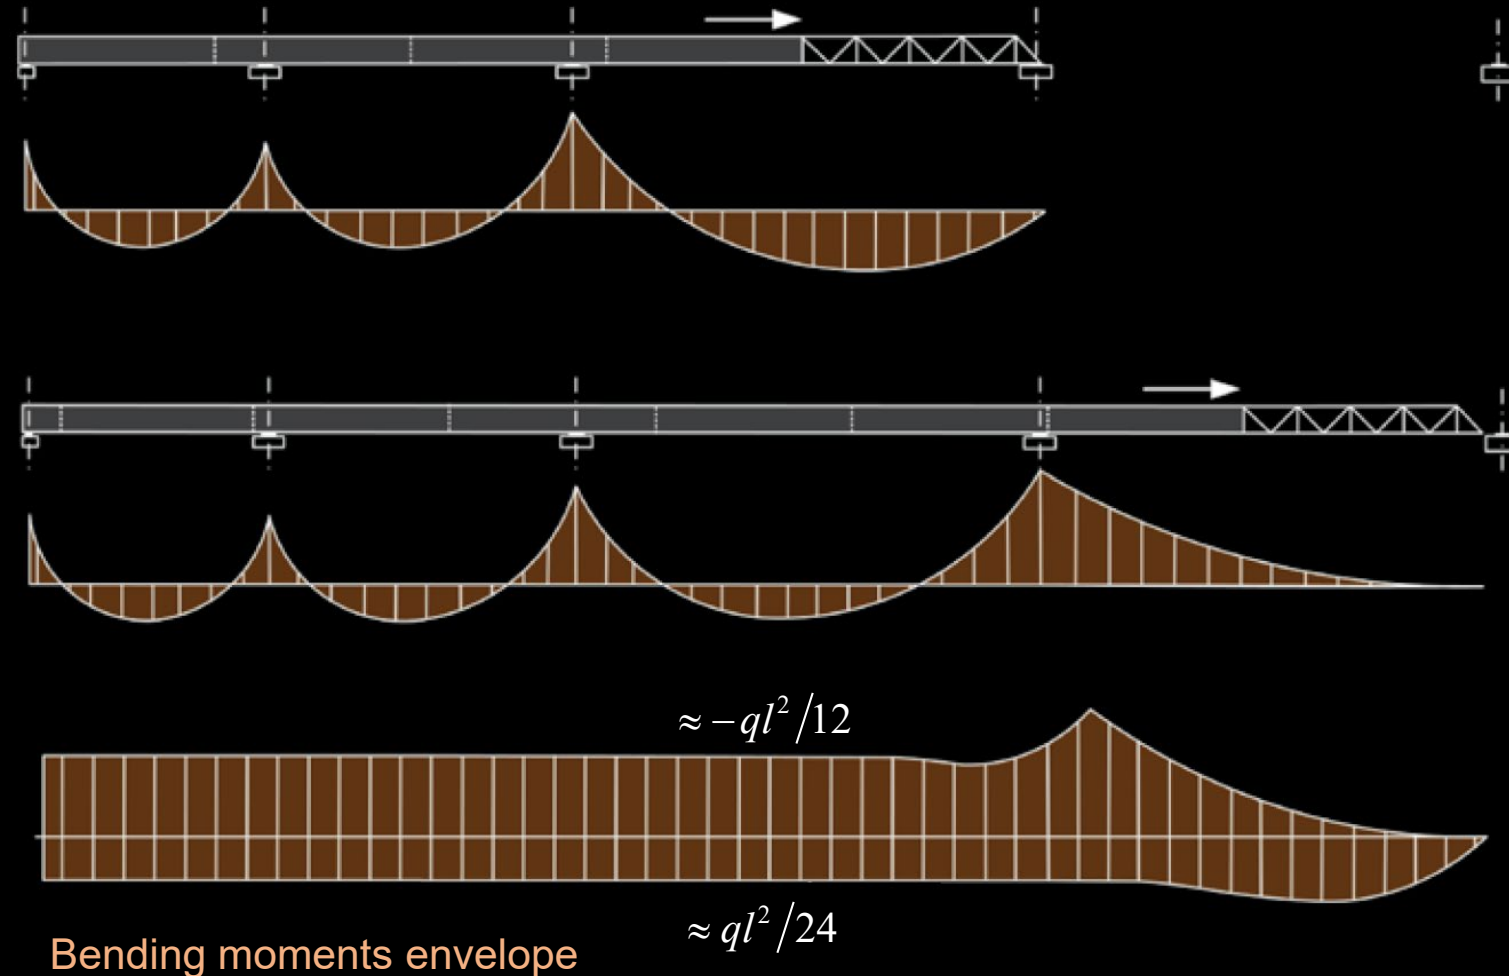

# Design Criteria – Construction

## Conclusions:

- The construction process is an integral part of the structural concept
- Neglecting the construction process in the early design phase may lead to excessive cost

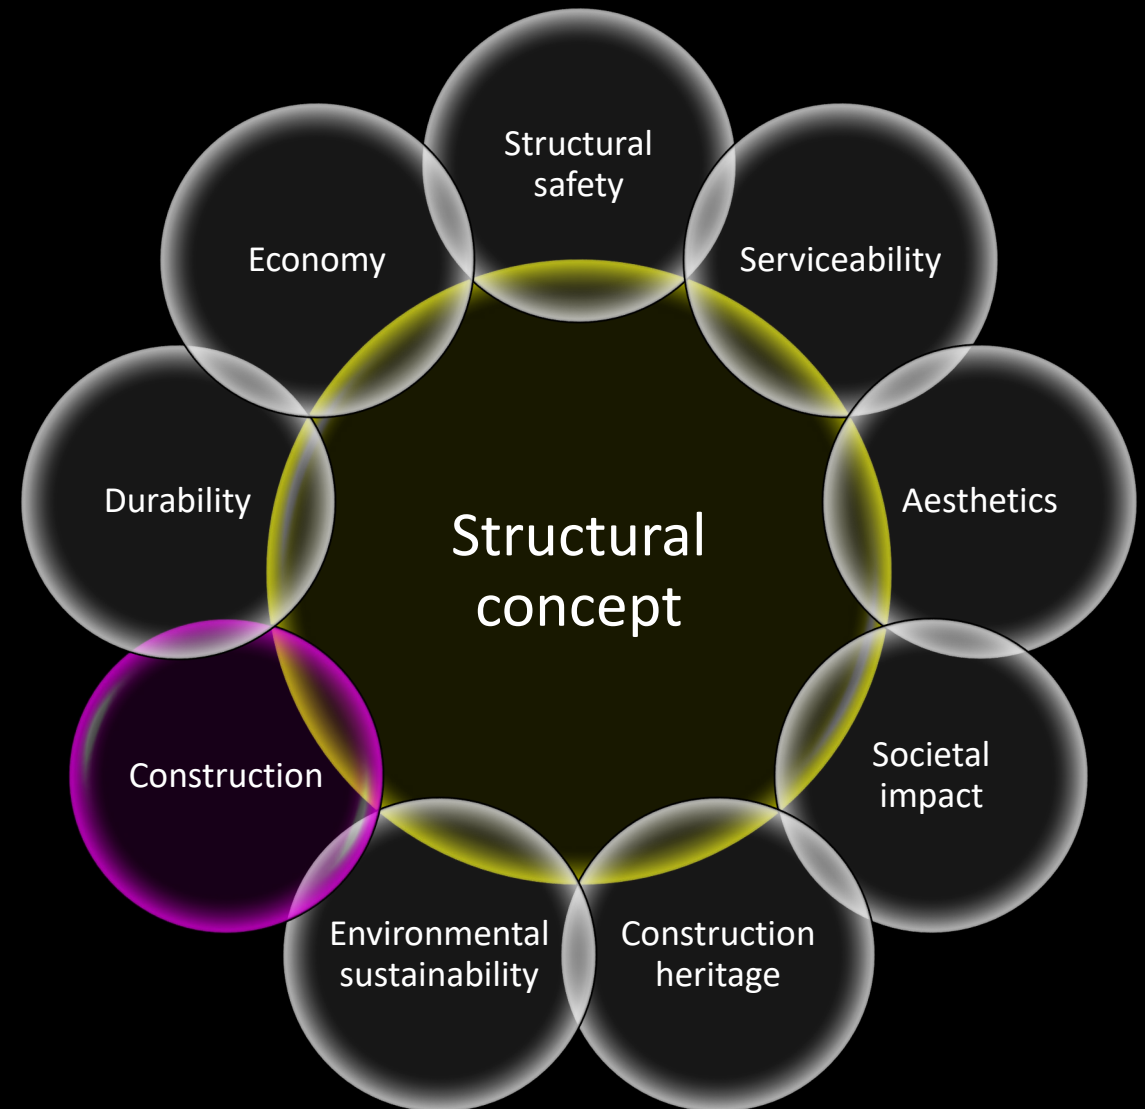

# Design Criteria – Construction

In extraordinary bridges, the construction process is absolutely key...



Millau viaduct, France, 2004. Dr. Michel Virlogeux

# Design Criteria – Construction

In extraordinary bridges, the construction process is absolutely key...



Tamina bridge, Switzerland, 2017. Leonhardt, Andrä und Partner

# Design Criteria – Construction

Sometimes ... conventional methods are still the only viable solution





# Conceptual Design

Holistic Design – Process

Ganzheitlicher Entwurf – Prozess

# Holistic Design – Process


## Interdisciplinary design team

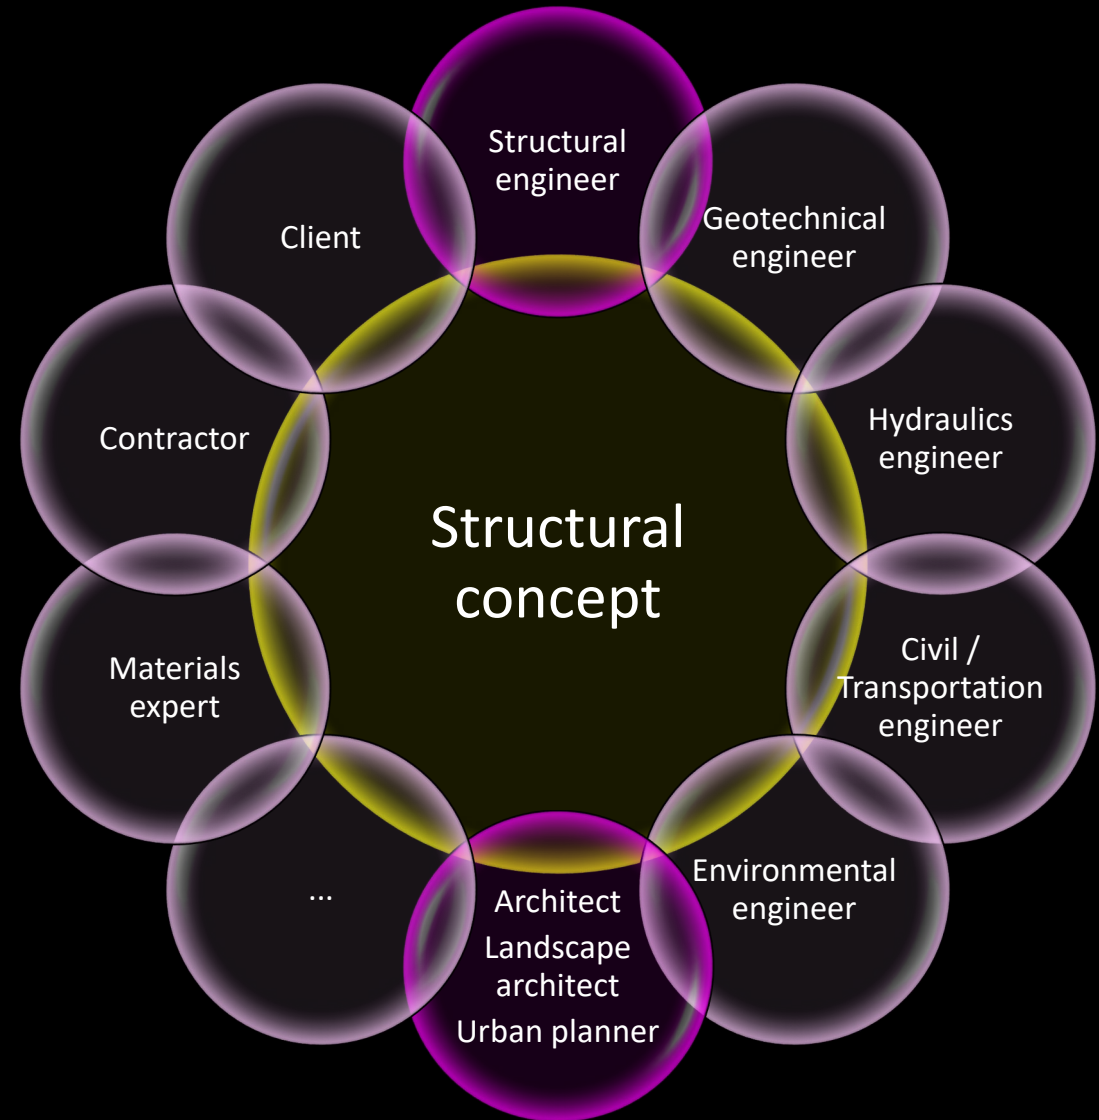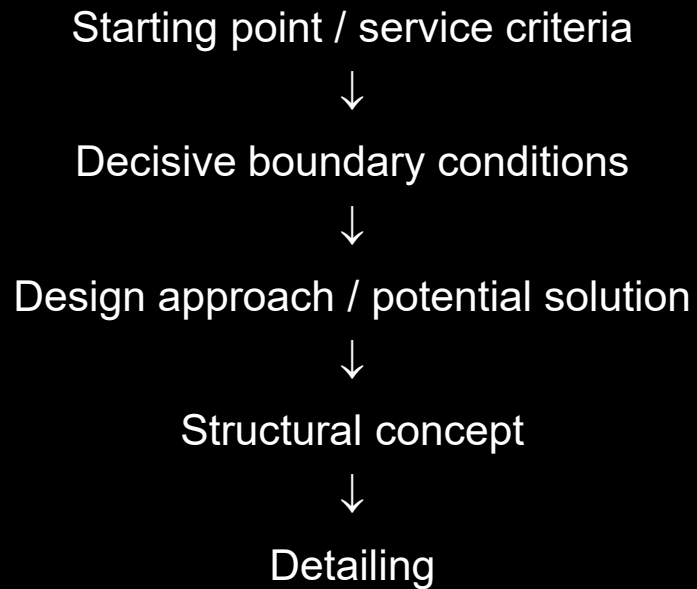



# Holistic Design – Example

Punt d'En / Inn bridge Vulpera, 2007-2010

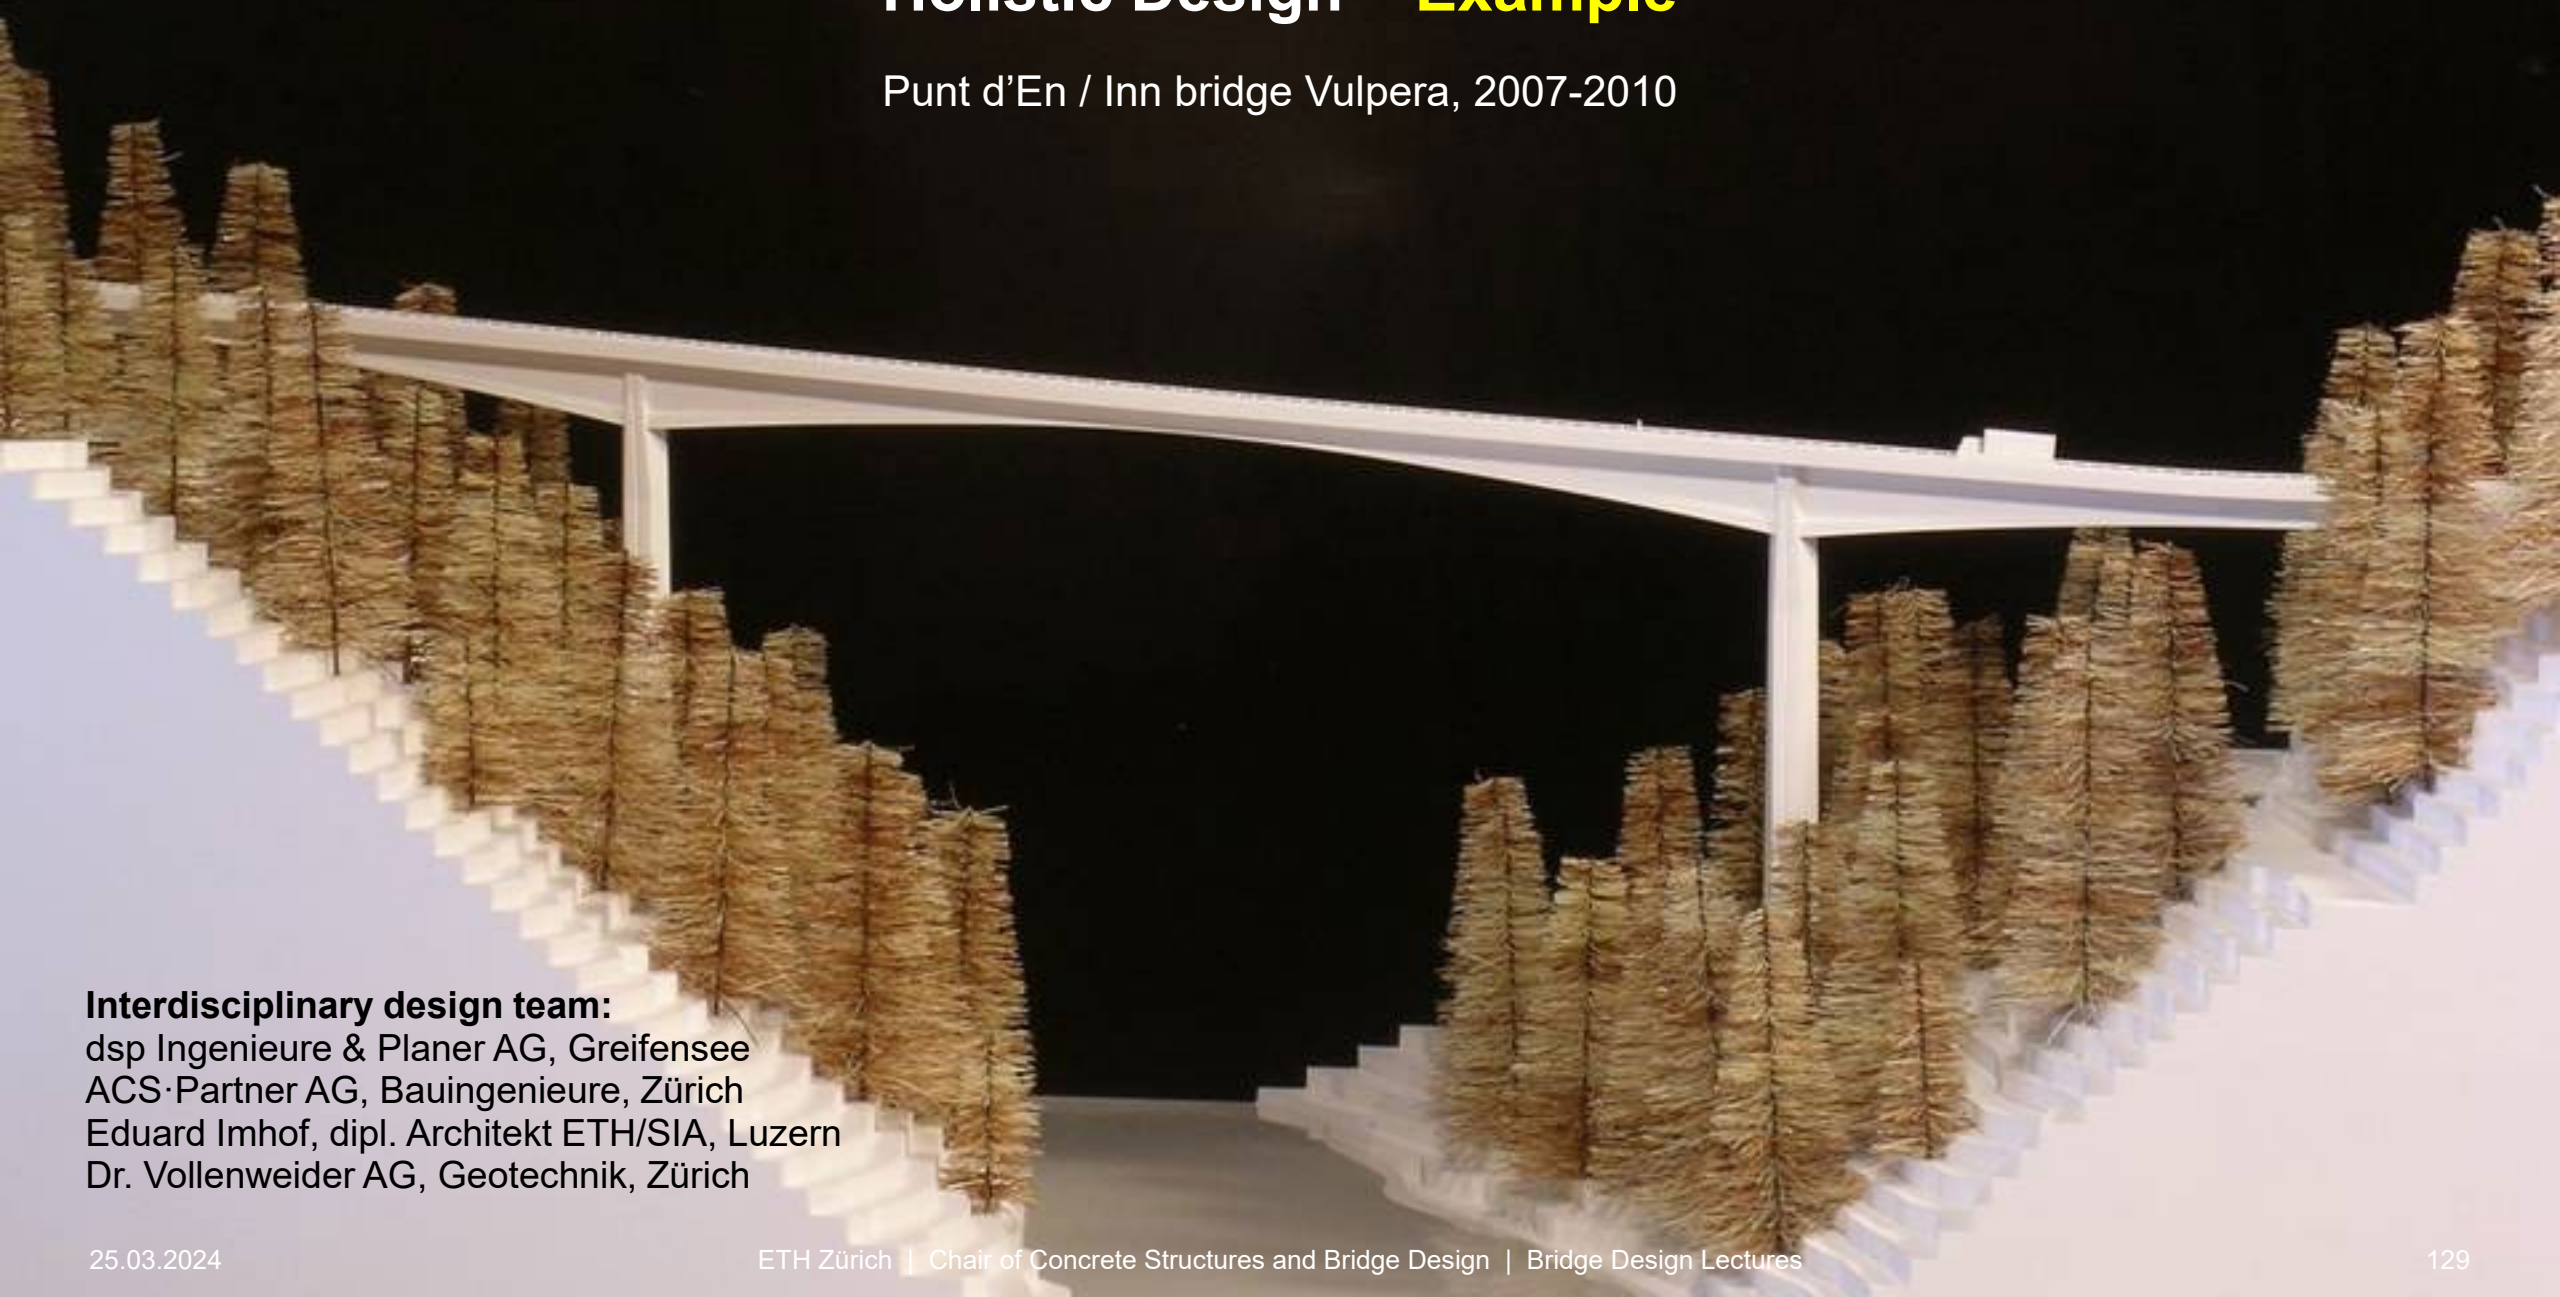

## Interdisciplinary design team:

dsp Ingenieure & Planer AG, Greifensee  
ACS-Partner AG, Bauingenieure, Zürich  
Eduard Imhof, dipl. Architekt ETH/SIA, Luzern  
Dr. Vollenweider AG, Geotechnik, Zürich

# Holistic Design – Example

Interdisciplinary design team

Starting point / service criteria



Decisive boundary conditions




Design approach / potential solution




Structural concept




Detailing

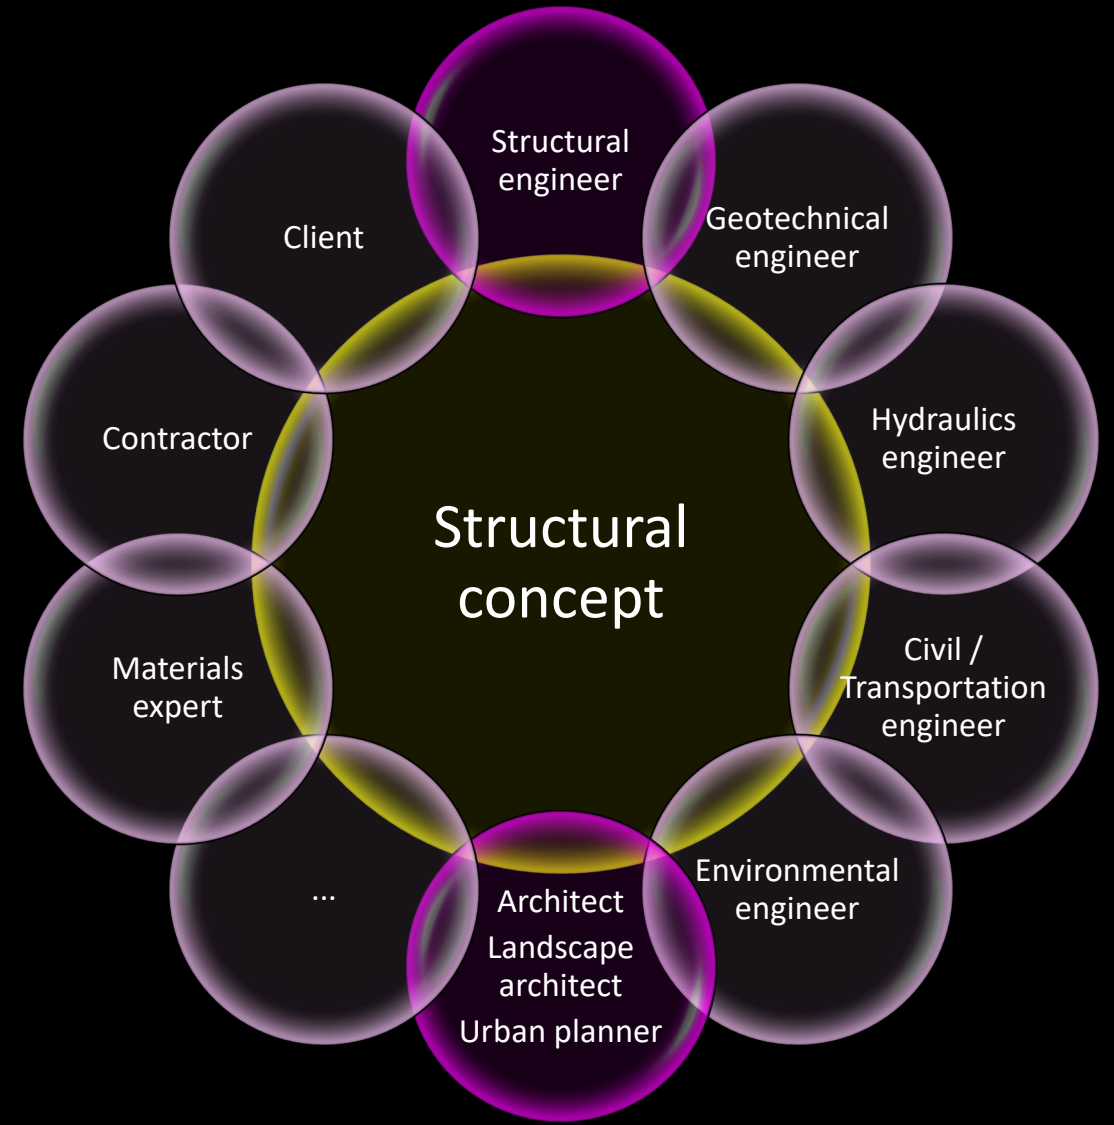


# Holistic Design – Example: Obvious (?) solutions

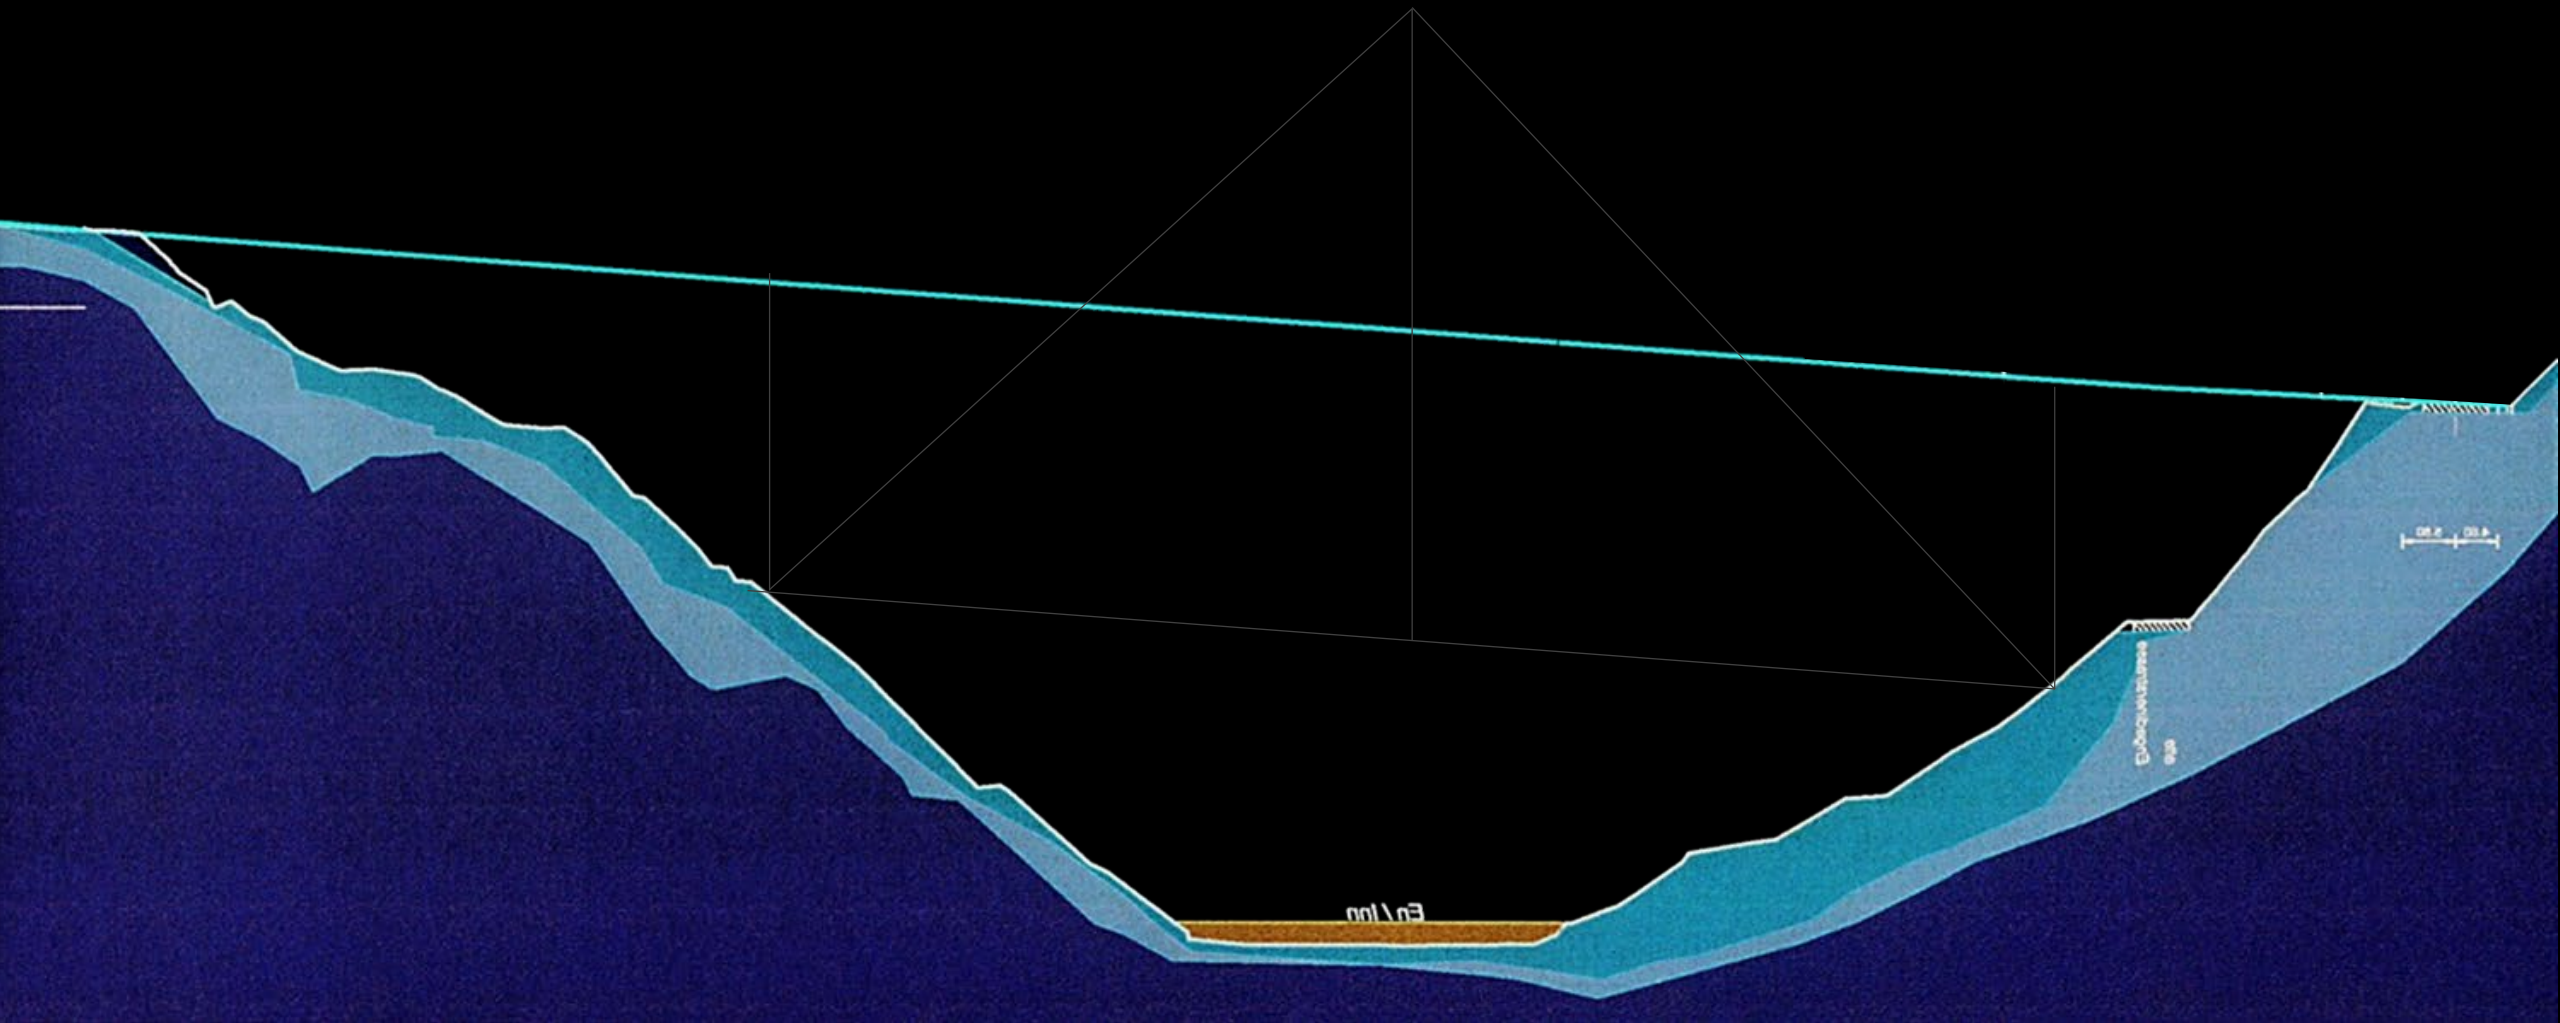

# Holistic Design – **Example: Obvious (?) solutions**

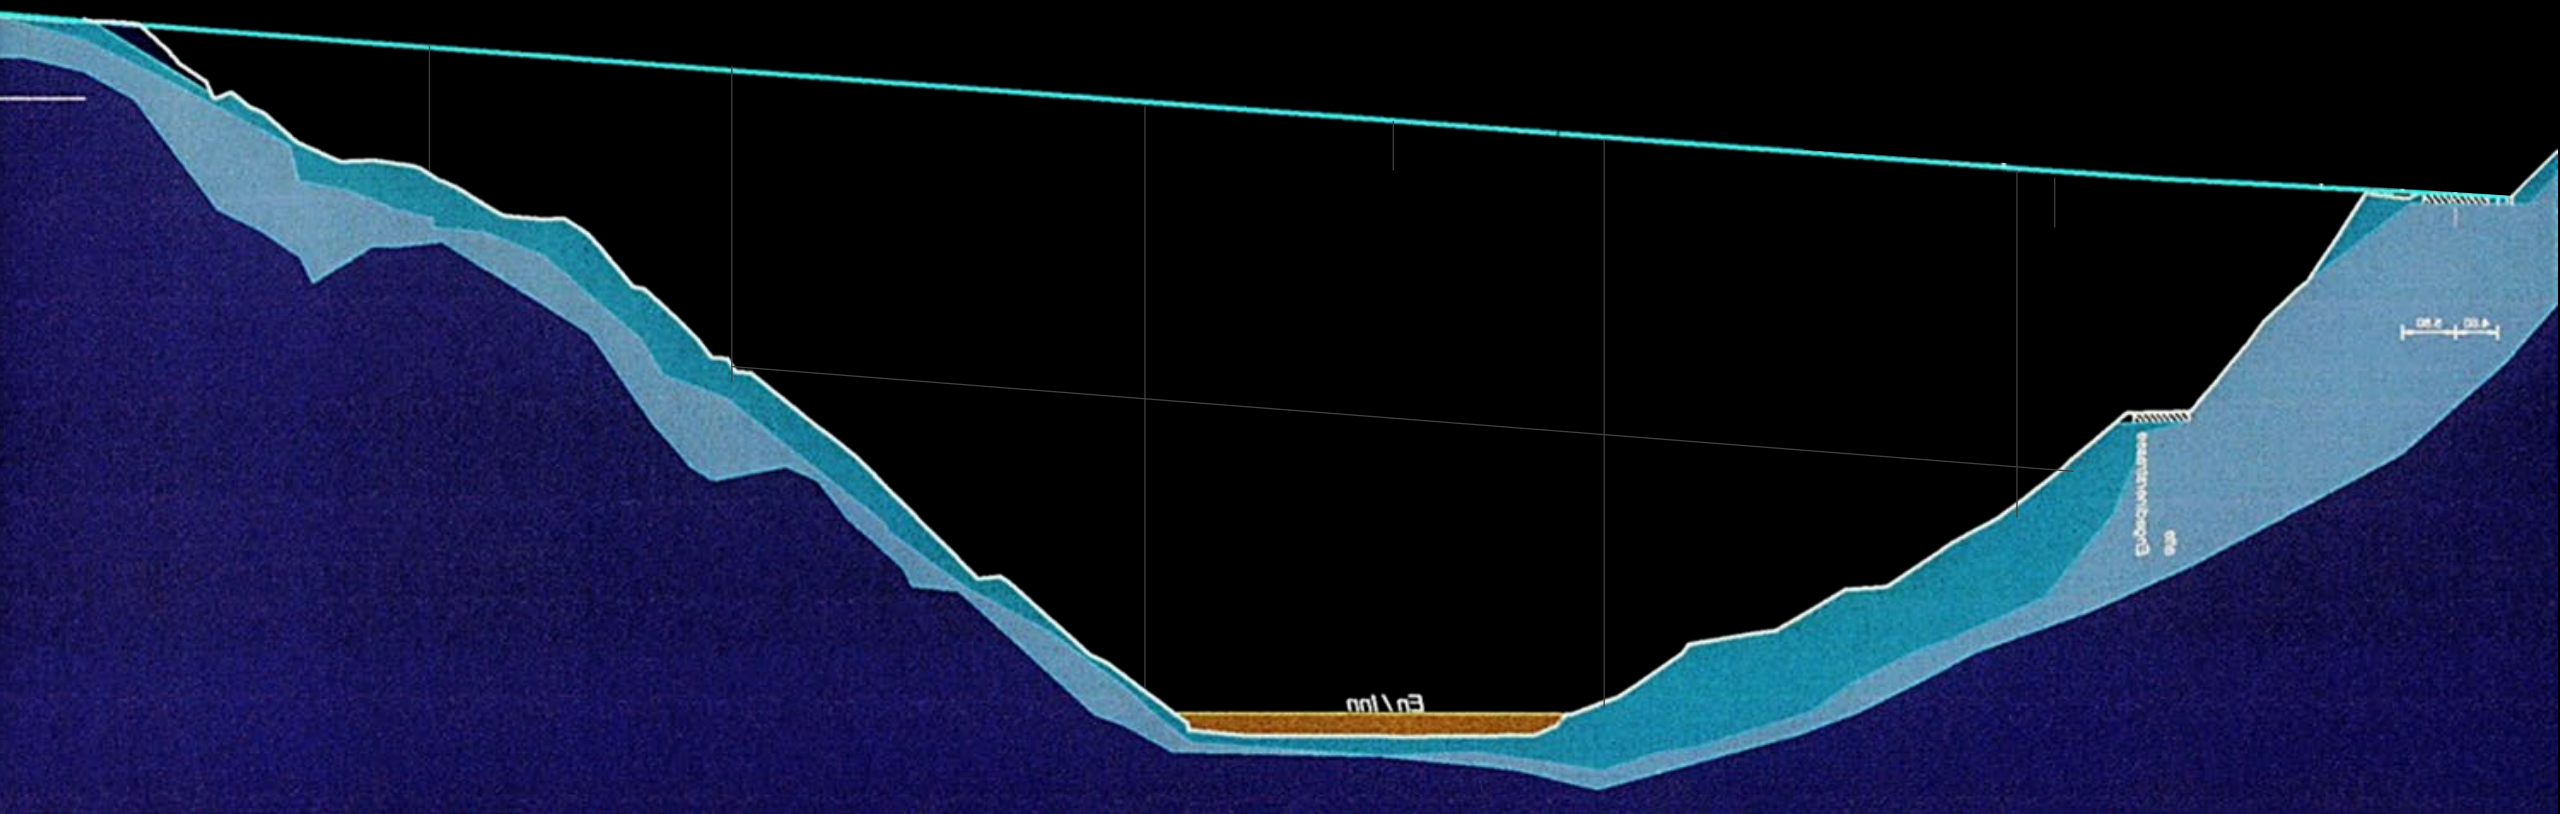

# Holistic Design – Example: Starting Point

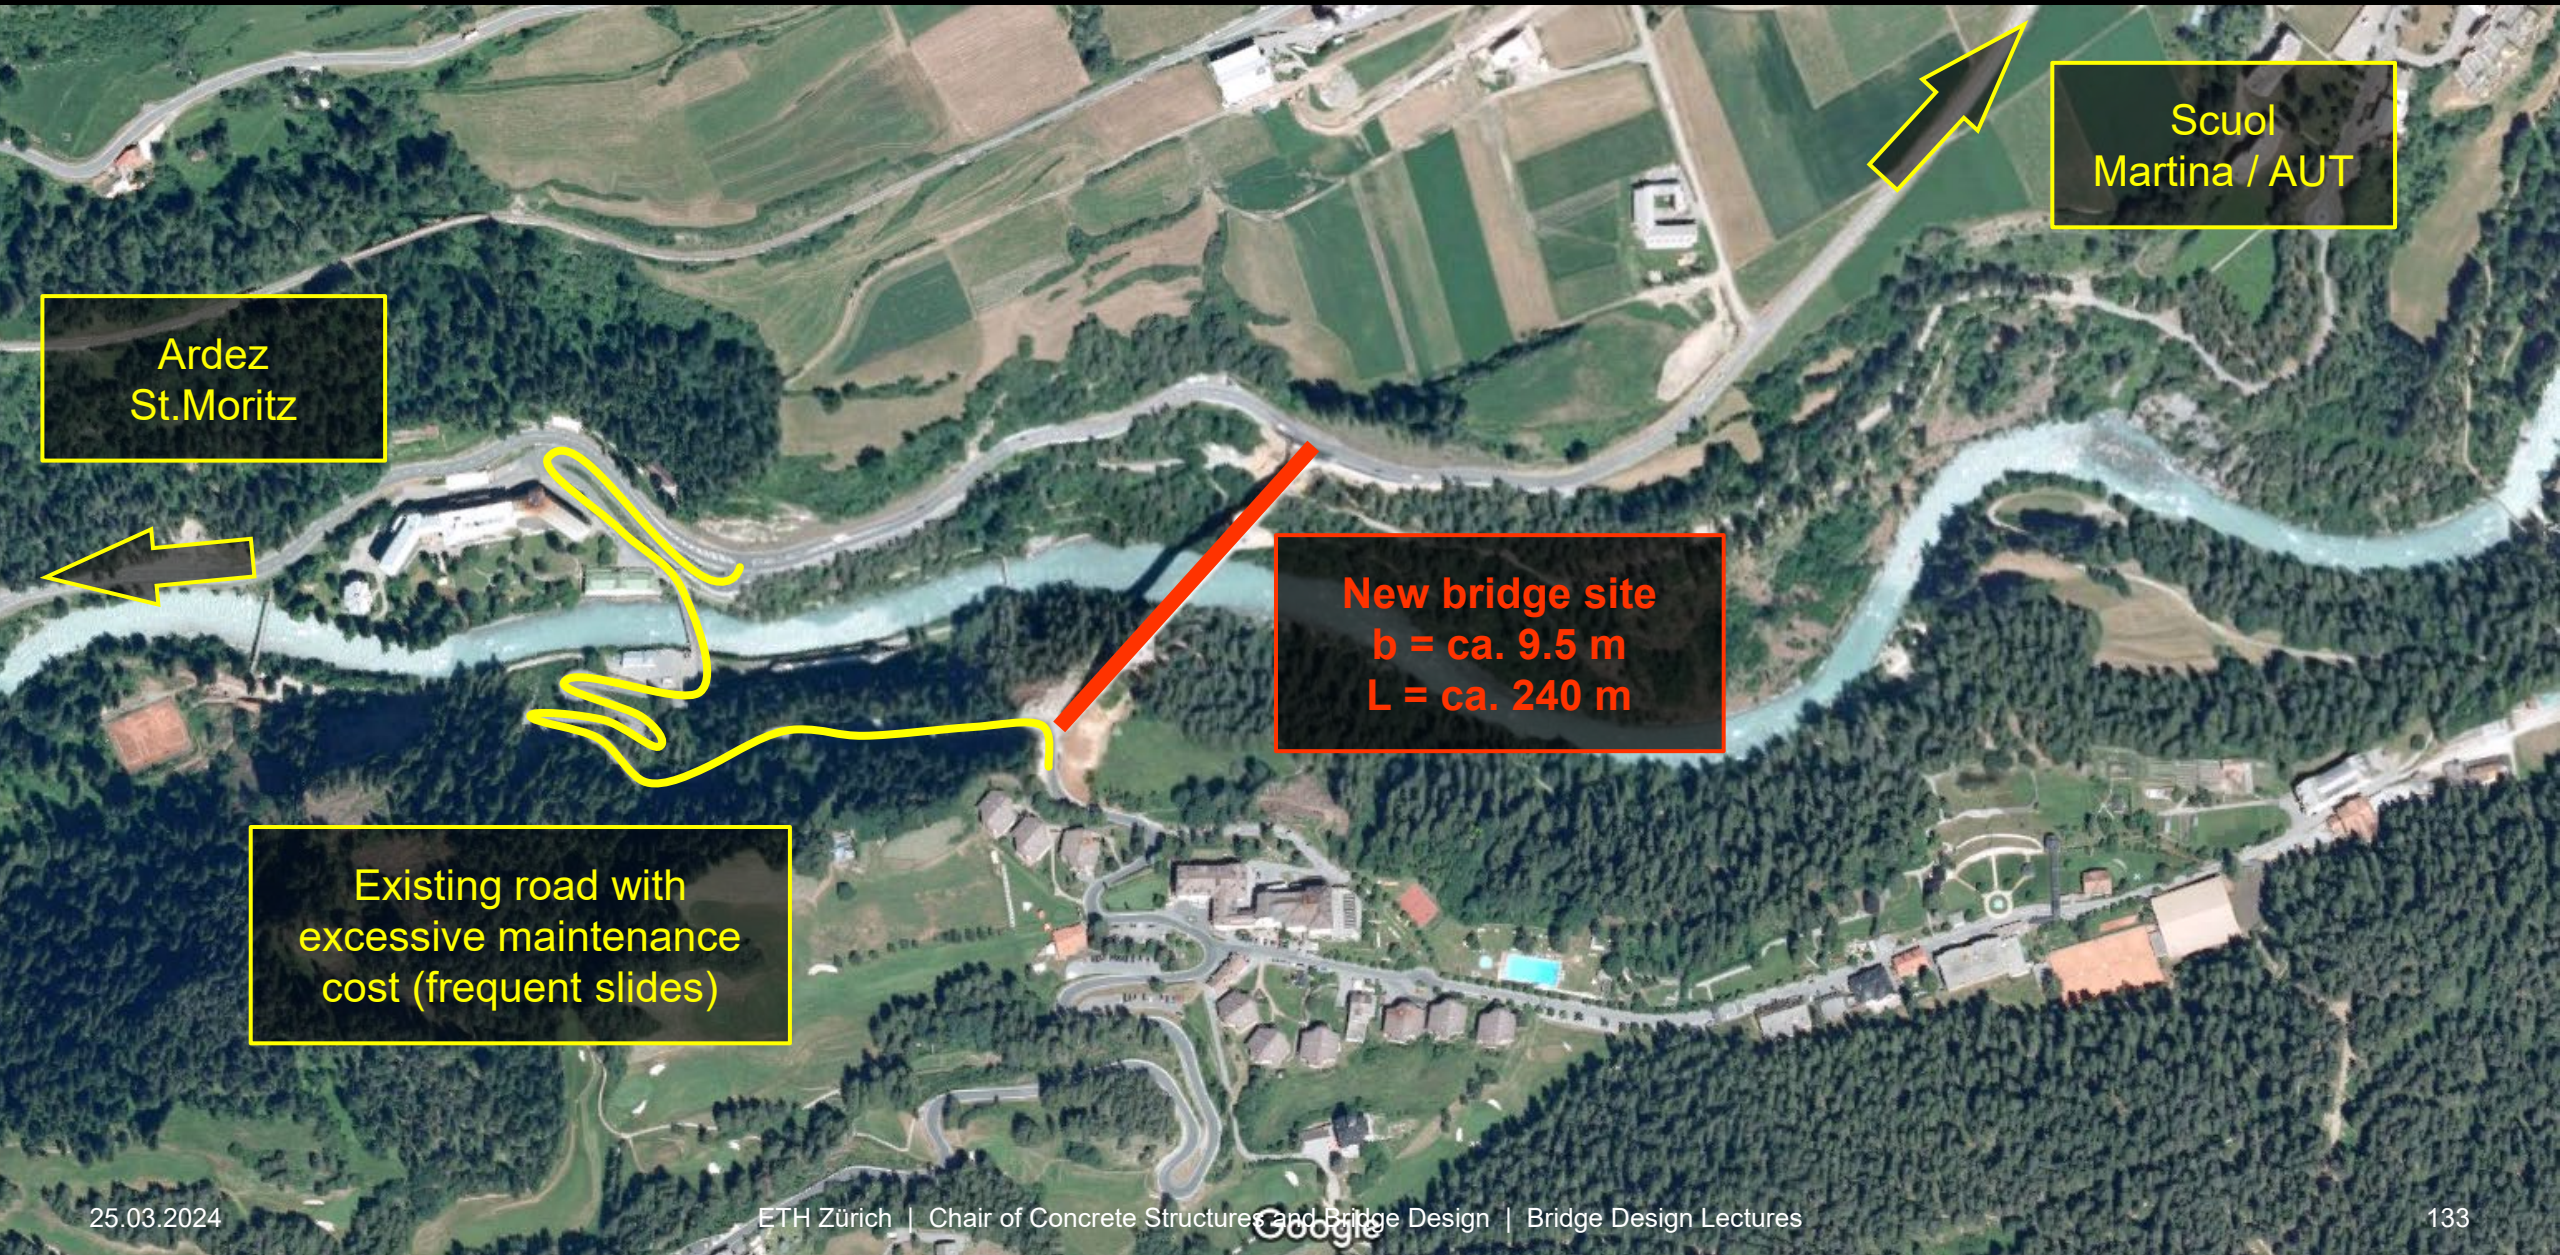


Ardez  
St.Moritz

Scuol  
Martina / AUT

New bridge site  
b = ca. 9.5 m  
L = ca. 240 m

Existing road with  
excessive maintenance  
cost (frequent slides)

# Holistic Design – Example: Boundary Conditions

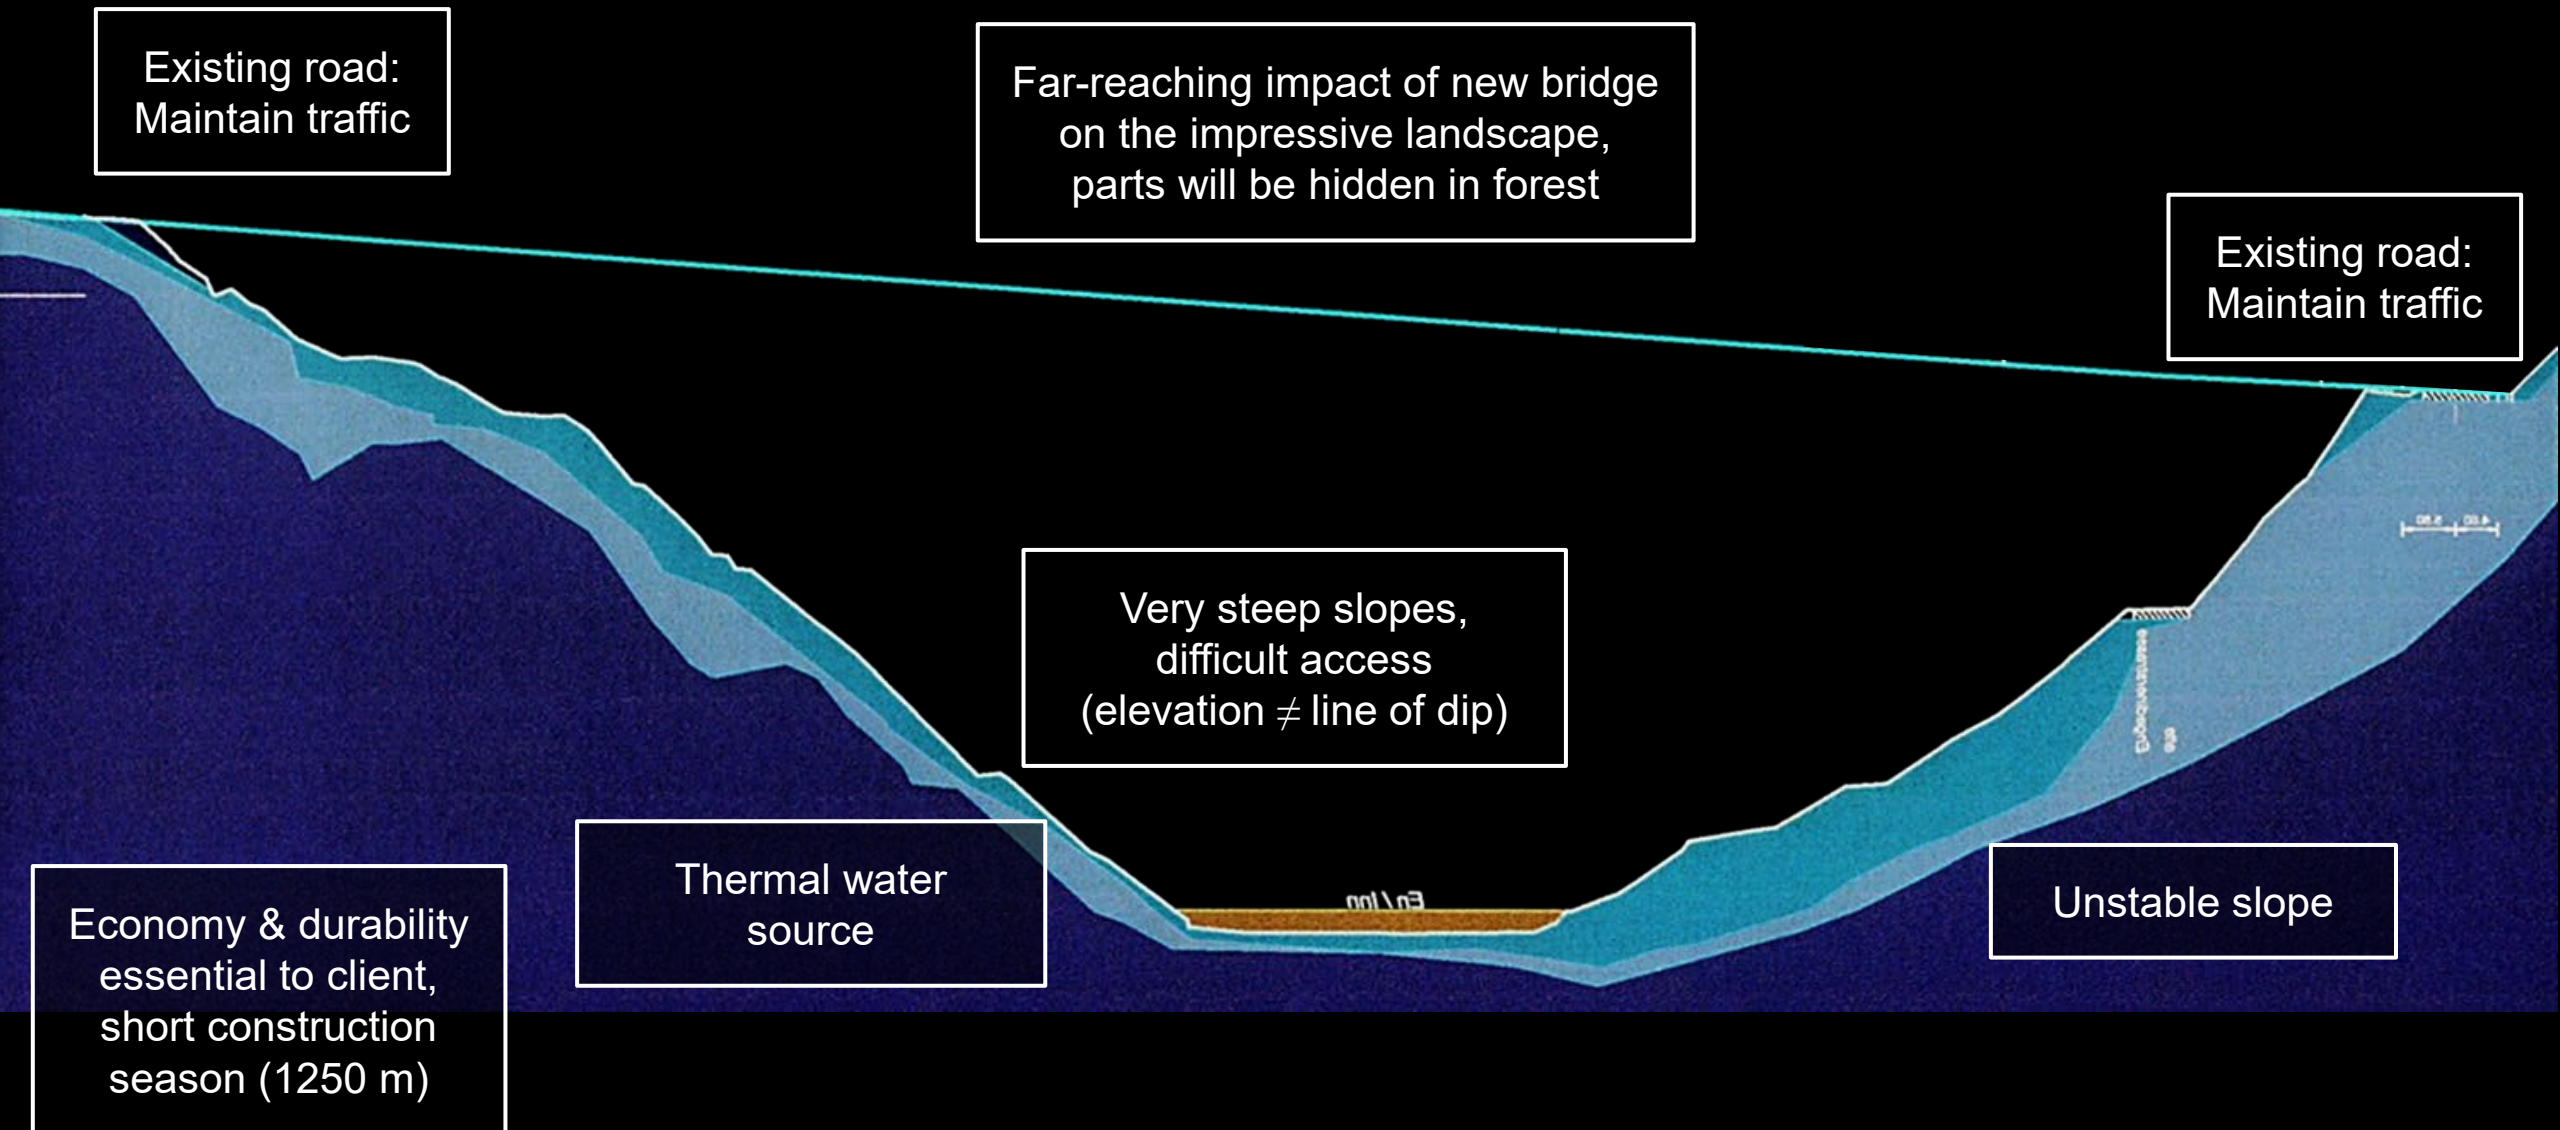

# Holistic Design – Example: Decisive Boundary Conditions

Far-reaching impact of new bridge on the impressive landscape, parts will be hidden in forest

Very steep slopes, difficult access (elevation  $\neq$  line of dip)

Unstable slope

Economy & durability essential to client, short construction season (1250 m)









# Holistic Design – Example: Decisive Boundary Conditions

Far-reaching impact of new bridge on the impressive landscape, parts will be hidden in forest

Very steep slopes, difficult access (elevation  $\neq$  line of dip)

Unstable slope

Economy & durability essential to client, short construction season (1250 m)

# Holistic Design – Example: Design approach / potential solution

Bridge that integrates confidently  
in the impressive landscape  
→ no spectacular gesture  
→ no arch (logic of form)



Minimise interventions in  
steep slopes  
→ few separate construction  
sites with individual access

Minimise horizontal reactions  
and transfer to foundation  
with high vertical loads  
→ deep foundation, no arch

Construction process  
as key element in  
conceptual design

# Holistic Design – Process

## Interdisciplinary design team

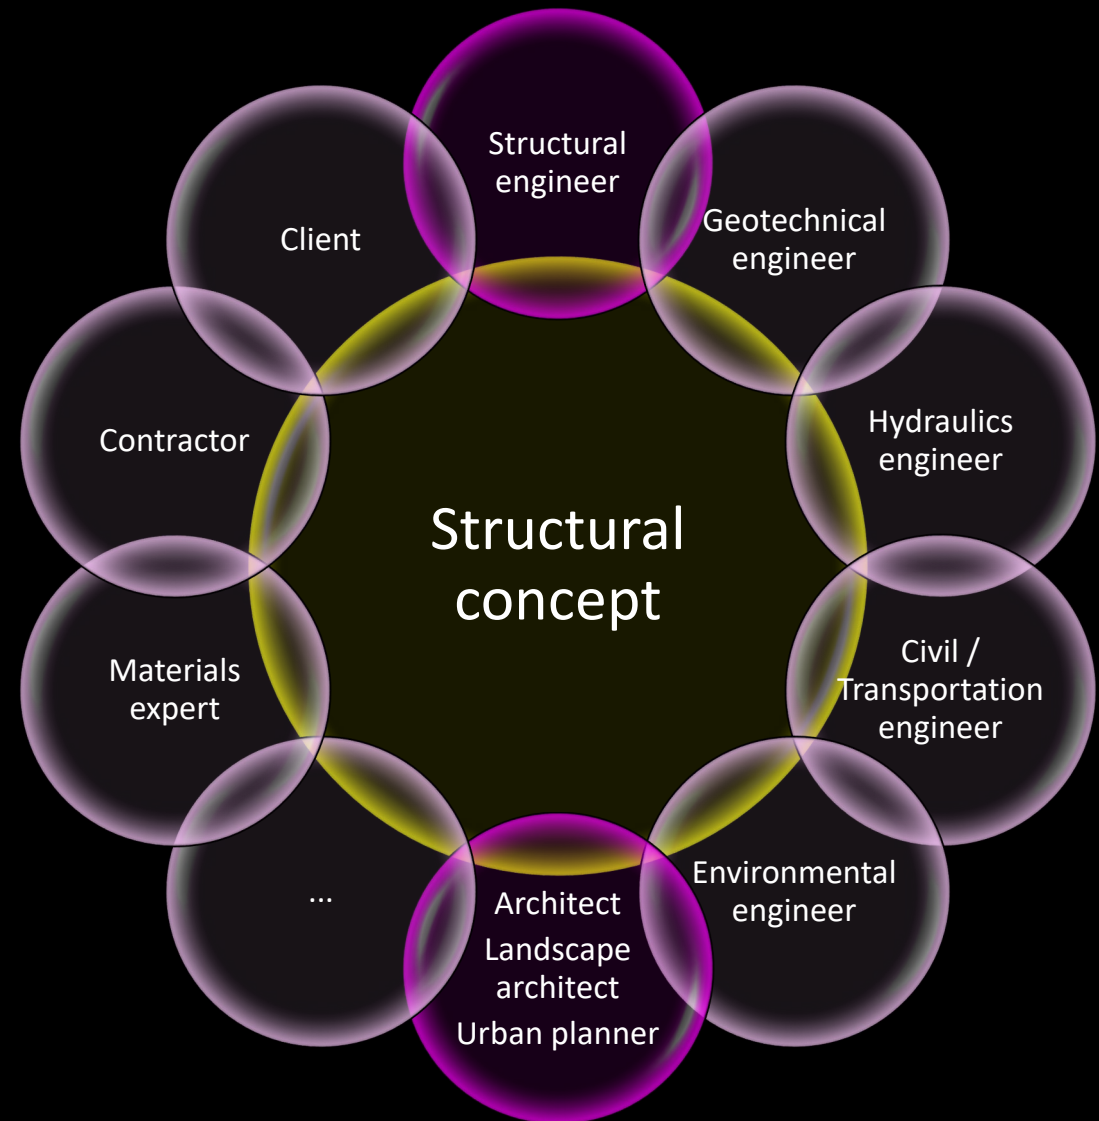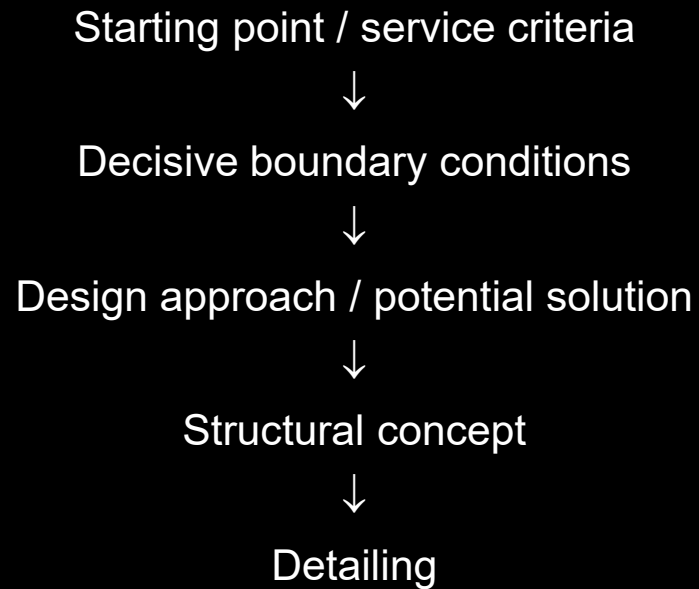

# Holistic Design – Process

Interdisciplinary design team

Starting point / service criteria



Decisive boundary conditions




Design approach / potential solution



Structural concept




Detailing

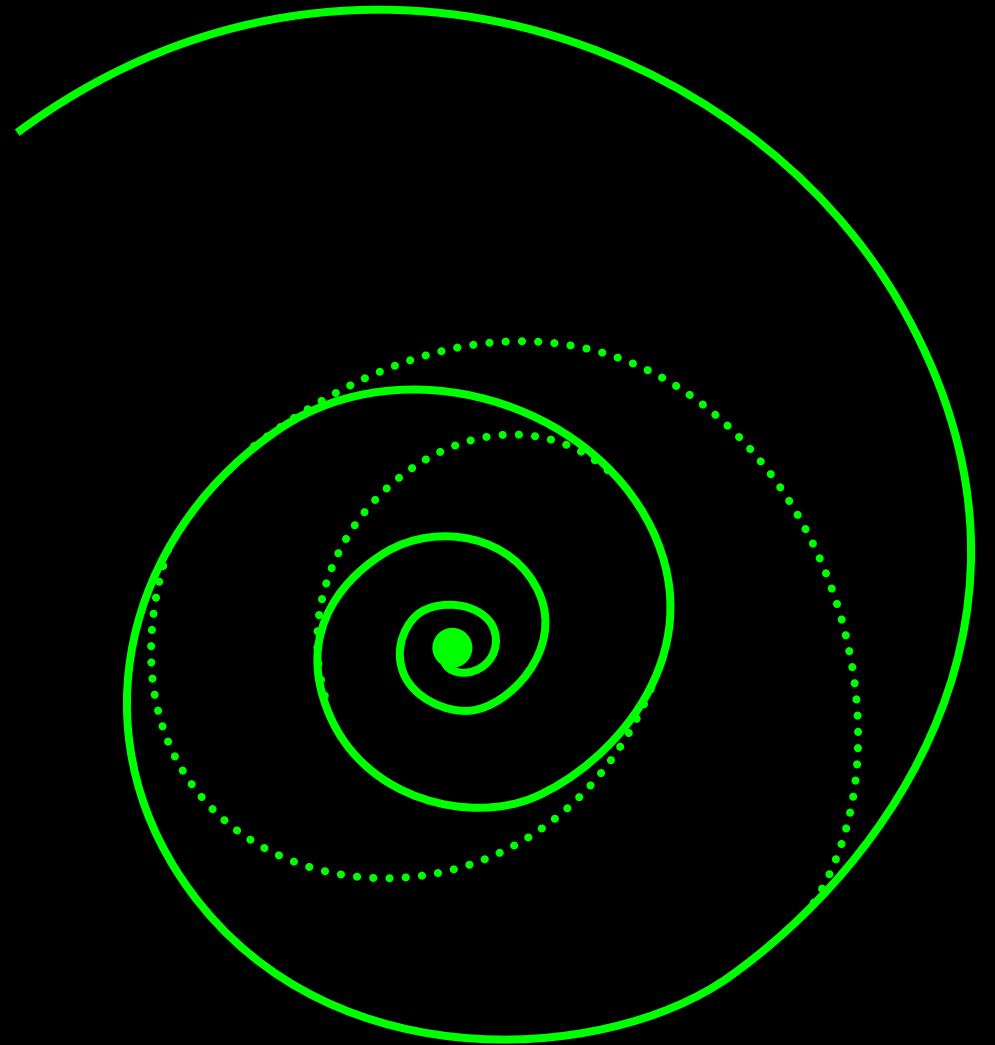


# Holistic Design – Process

## Interdisciplinary design team

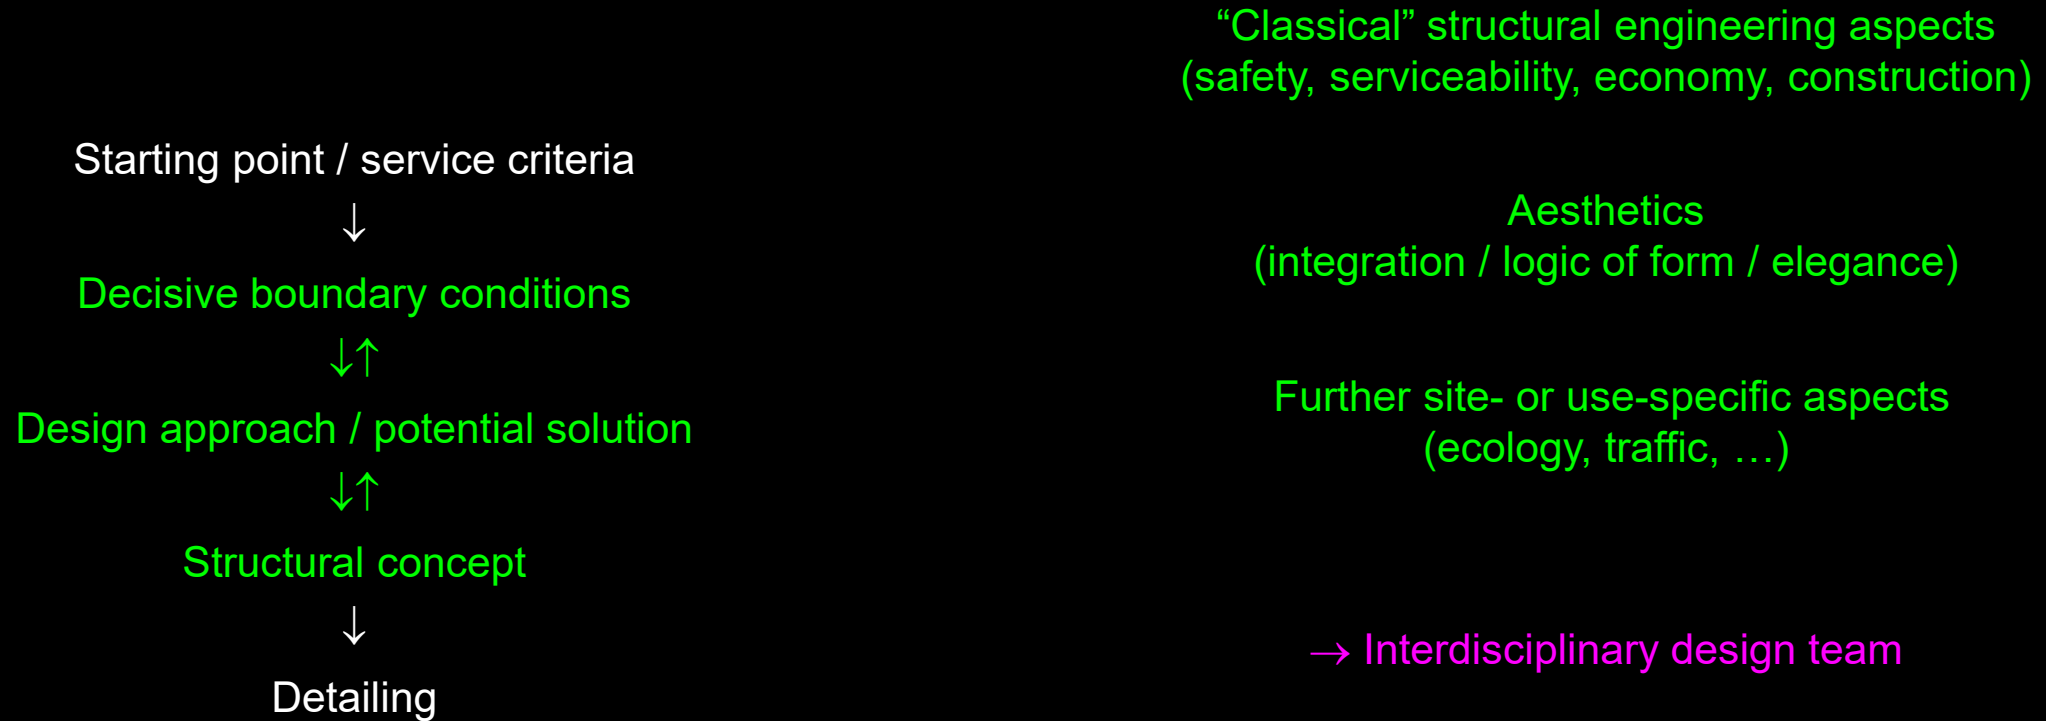

# Holistic Design – Process


## Interdisciplinary design team

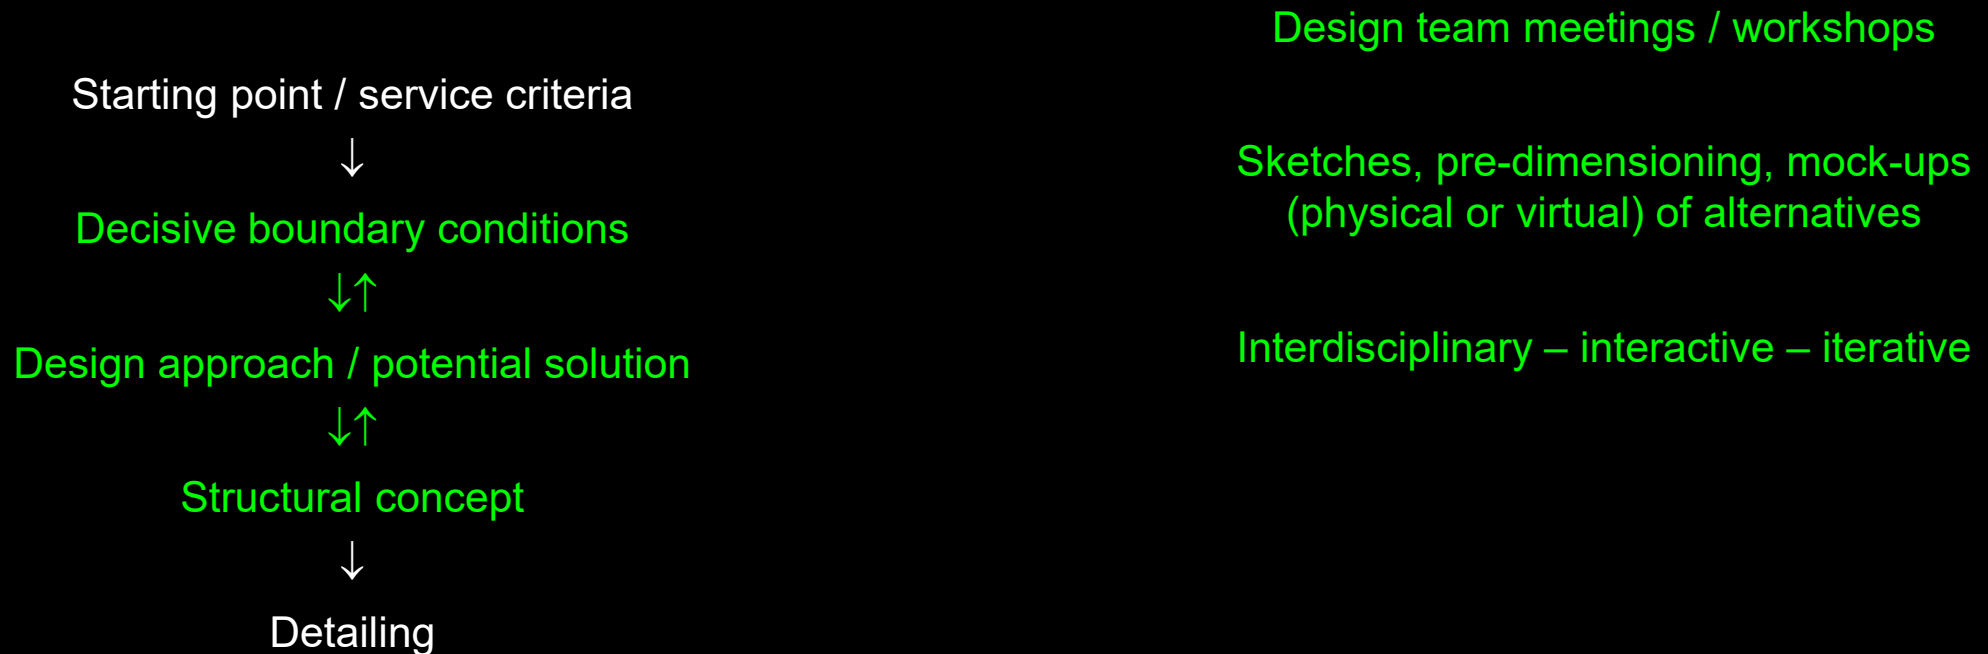



# Holistic Design – Process

## Interdisciplinary design team

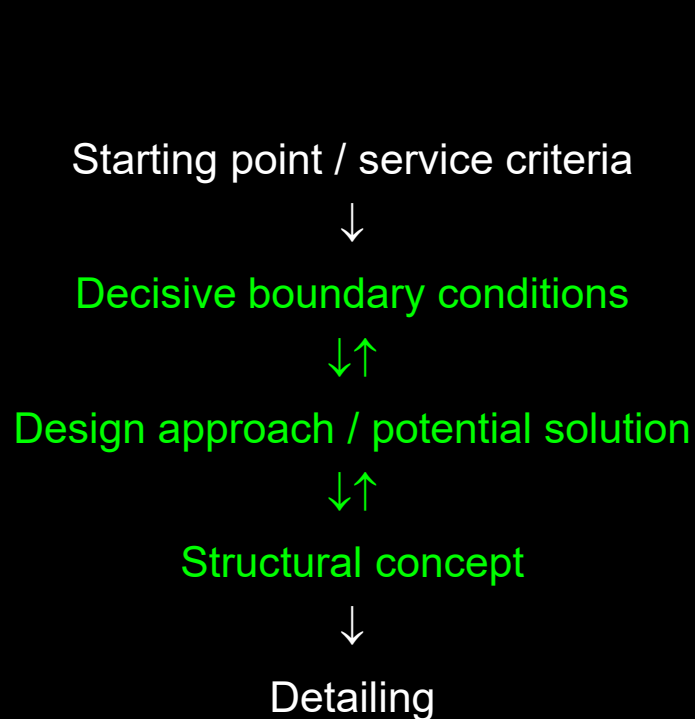

Structural engineer, architect and further experts as required develop the structural concept collaboratively, in a dialogue

A “division of tasks” is ill-suited


The collaboration is non-hierarchical

*“The necessary task is to give attention to places and buildings. That is the task of ‘builders’. And the ‘builders’ are precisely the new profession that must link in a tireless and friendly dialogue the engineer and the architect, the left hand and the right hand of the art of building”*

*(Le Corbusier, 1966)*

# Holistic Design – Design Process

## Interdisciplinary design team

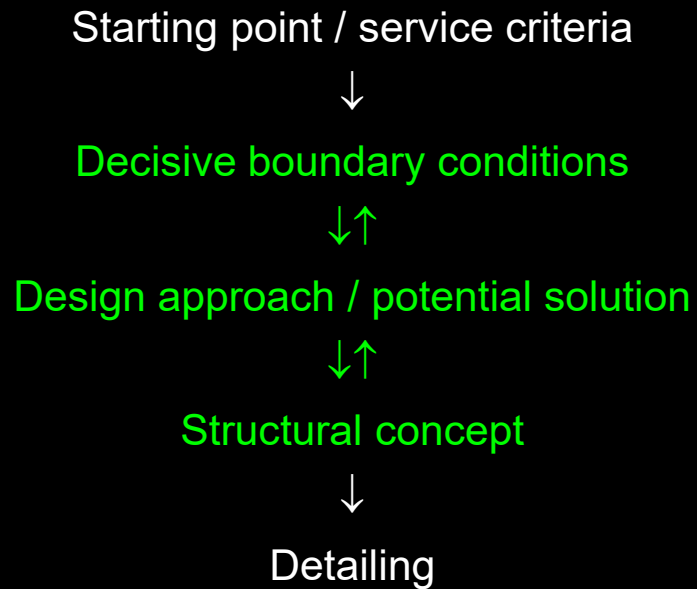

«The engineer develops the structural concept, the architect refines it»

is equally inappropriate as

«The architect conceives a structure, the engineer ensures its structural integrity»

# Holistic Design – Design Process

## Interdisciplinary design team

Starting point / service criteria



Decisive boundary conditions



Design approach / potential solution



Structural concept



Detailing

## Design team

High competencies in own field

Interest in, and affinity to other aspects  
(common vocabulary)

Ability to discourse in a dialogue

Open-mindedness  
(other's standpoints and ideas)

# Holistic Design – Design Process

Interdisciplinary design team

Starting point / service criteria



Decisive boundary conditions




Design approach / potential solution



Structural concept



Detailing

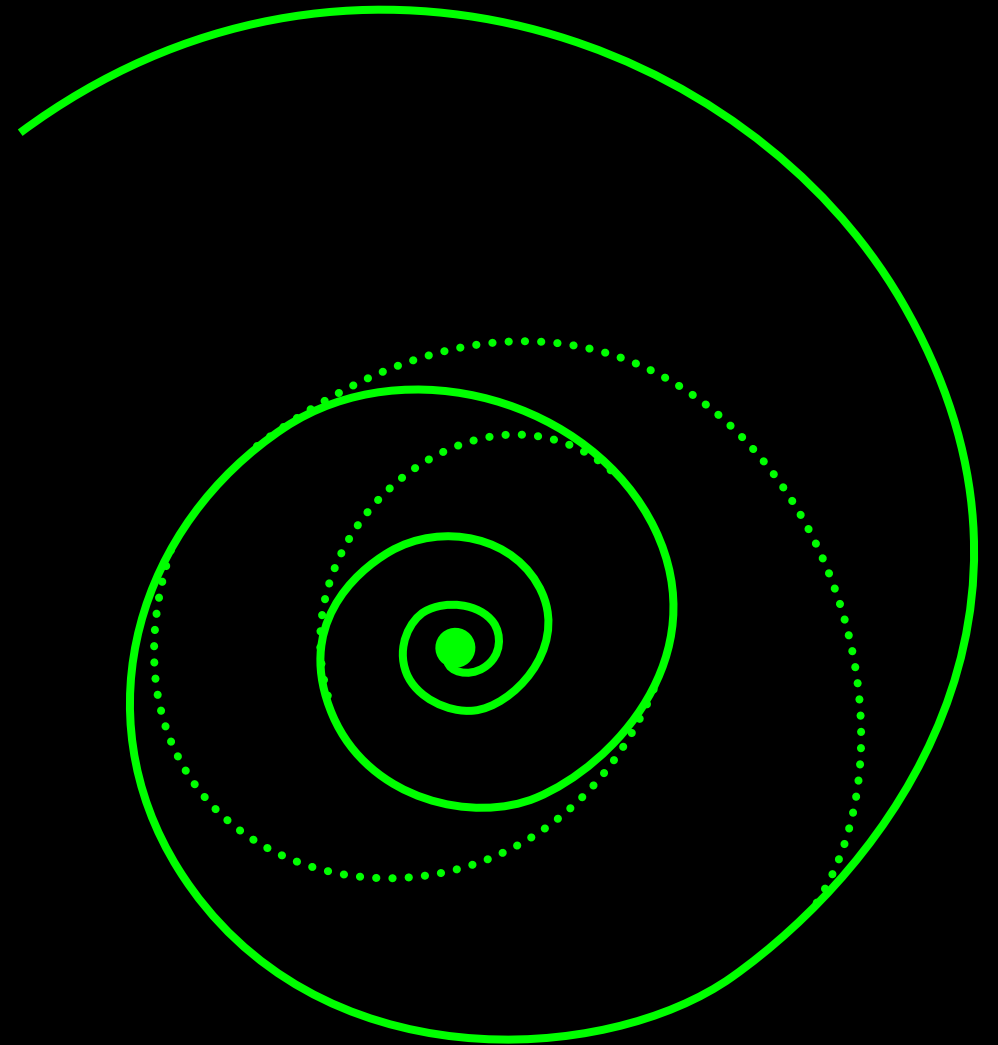

# Holistic Design – Example: Design approach / potential solution

Bridge that integrates confidently  
in the impressive landscape  
→ no spectacular gesture  
→ no arch (logic of form)

Minimise interventions in  
steep slopes  
→ few separate construction  
sites with individual access

Minimise horizontal reactions  
and transfer to foundation  
with high vertical loads  
→ deep foundation, no arch

Construction process  
as key element in  
conceptual design

# Holistic Design – Example: Design approach → Structural Concept

Bridge that integrates confidently  
in the impressive landscape  
→ no spectacular gesture  
→ no arch (logic of form)

Minimise interventions in  
steep slopes  
→ few separate construction  
sites with individual access

Minimise horizontal reactions  
and transfer to foundation  
with high vertical loads  
→ deep foundation, no arch

Construction process  
as key element in  
conceptual design

# Holistic Design – Example: Structural Concept


Conventional free-cantilevering bridge, yet carefully designed and detailed (logic of form); Structurally and aesthetically optimised pier positions

Balanced cantilevering starting from (only) two piers


“Standard” balanced cantilever solution, repeated formwork use (girder + piers)

Shaft foundations with joints to absorb slope sliding “floating” longitudinal support system


ANSICHT 1:500  
RICHTUNG SÜDOSTEN

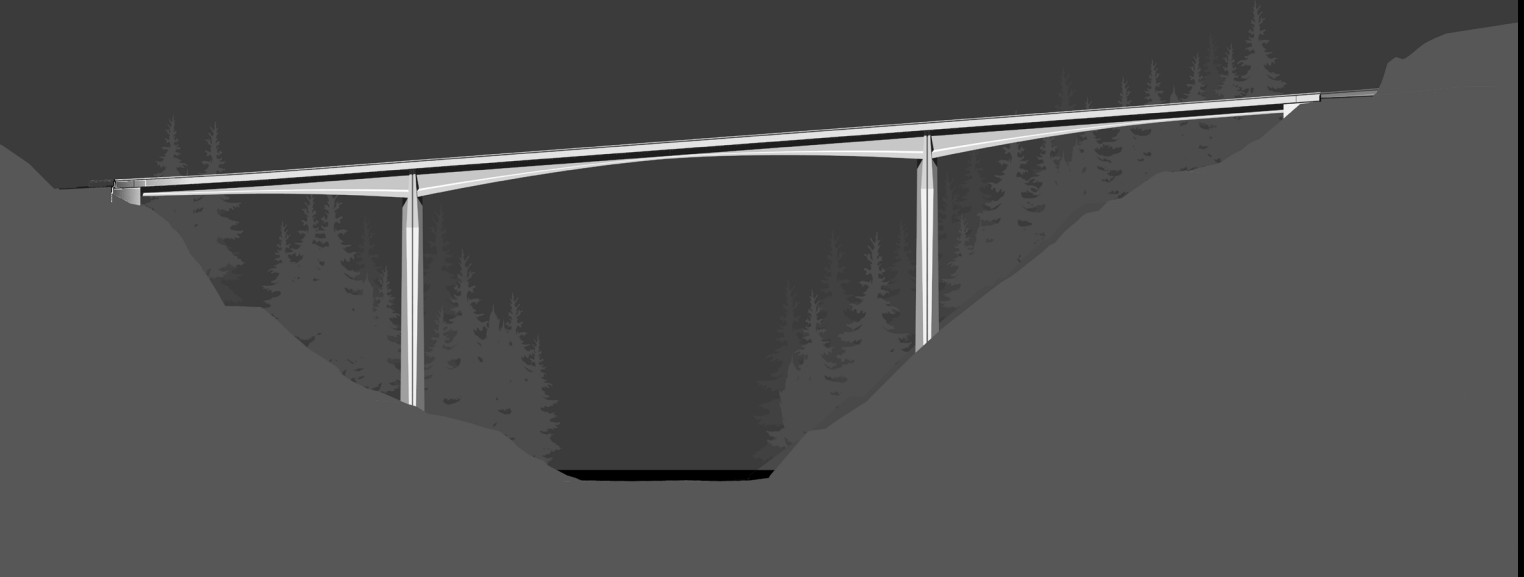


LÄNGSSCHNITT 1:500

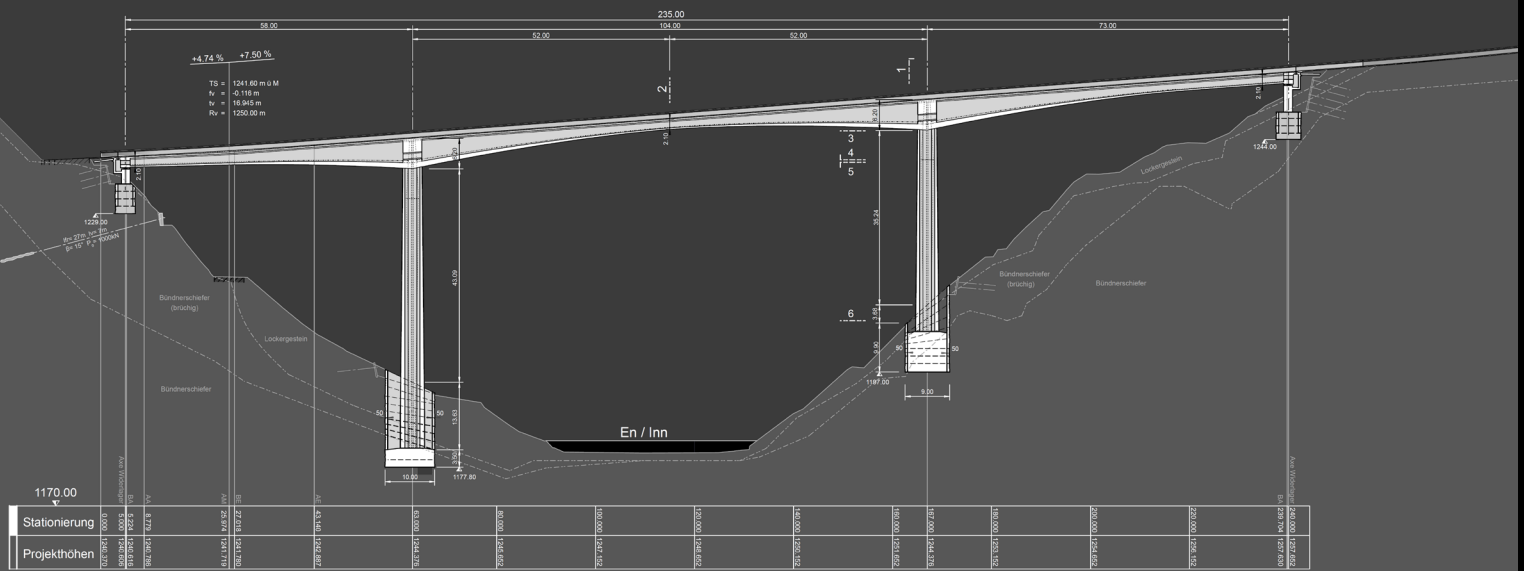


QUERSCHNITT 1:100  
FELDMITTE

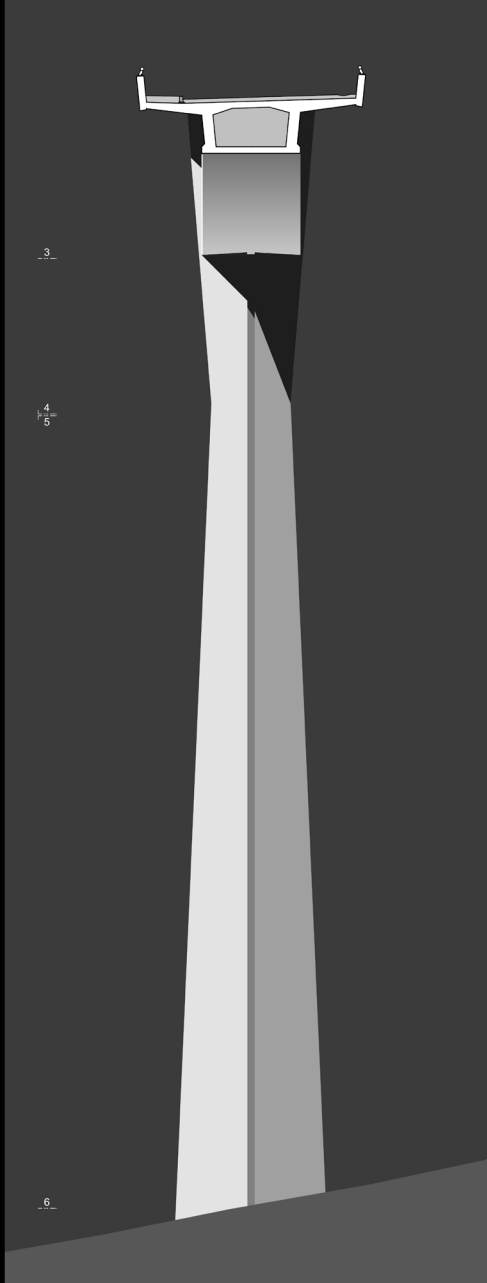


QUERSCHNITT 1-1 1:100

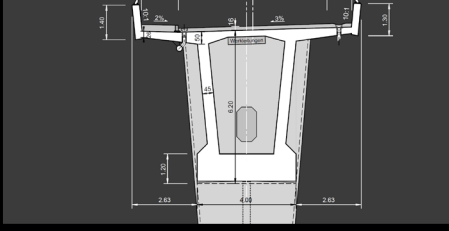


PFEILERQUERSCHNITTE 1:100

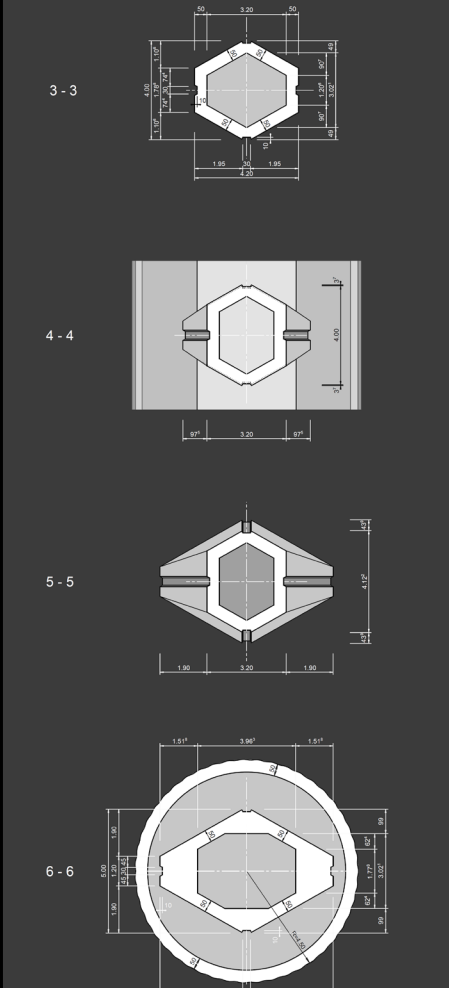




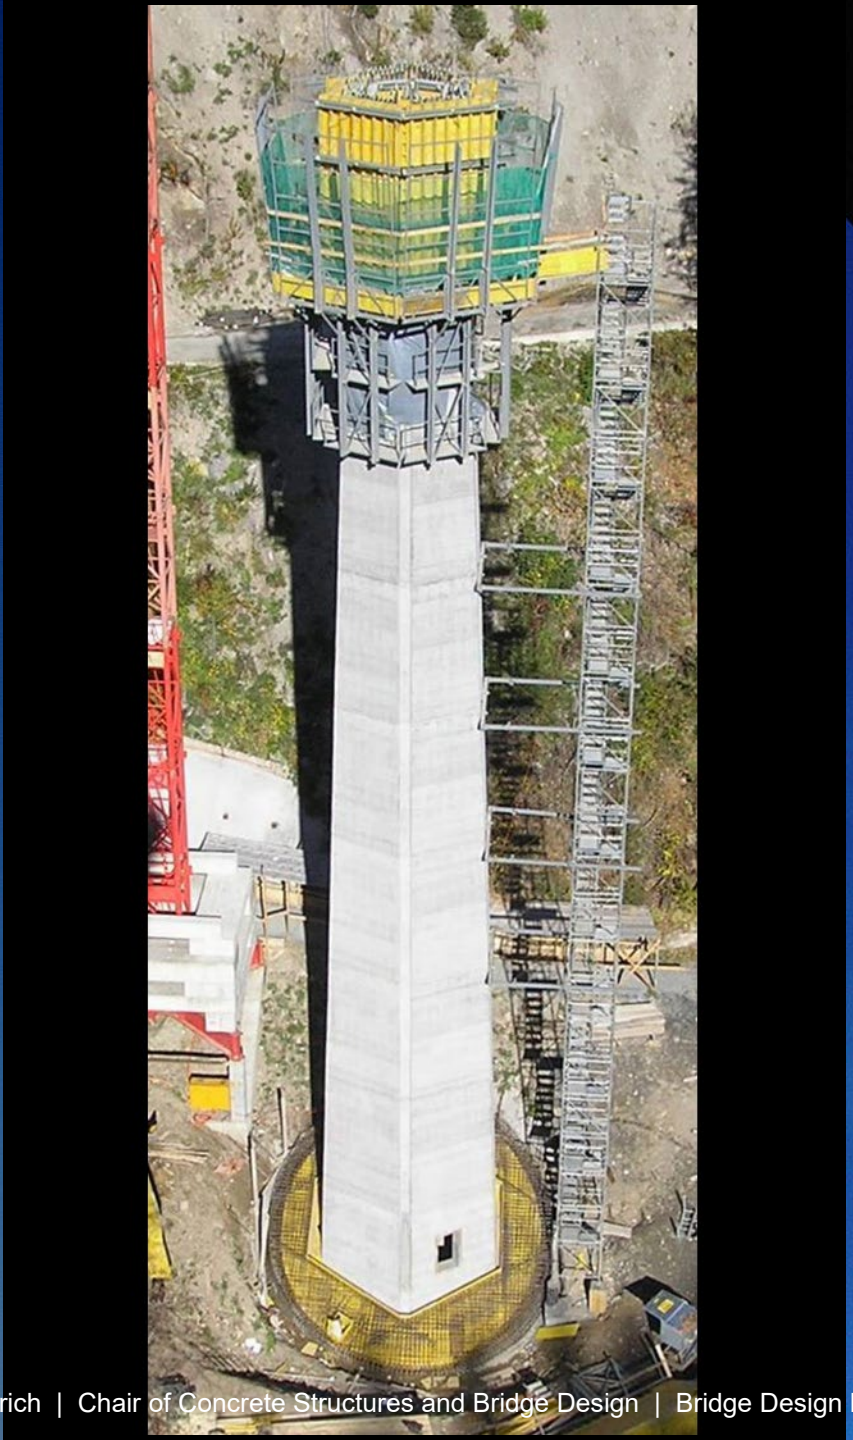

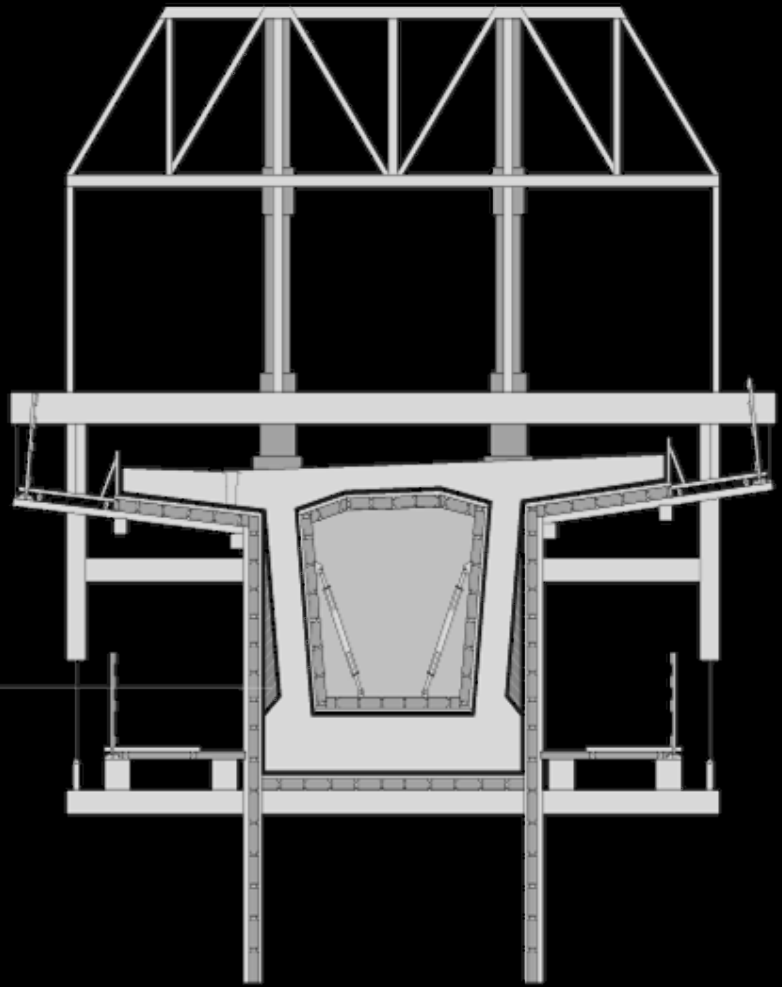

Schalungseinlage  
(etappenweise reduzierbar)

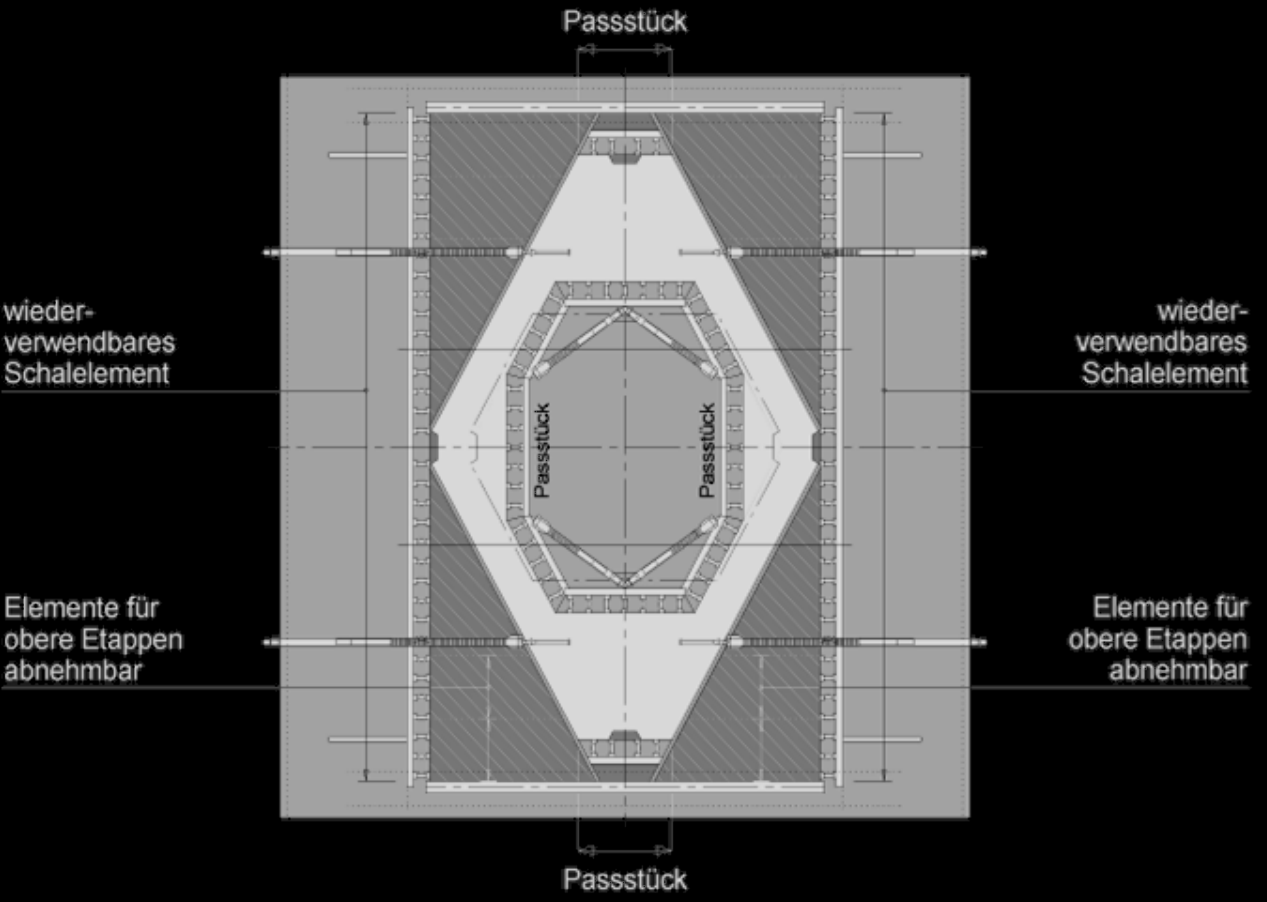

wieder-  
verwendbares  
Schalelement

wieder-  
verwendbares  
Schalelement

Elemente für  
obere Etappen  
abnehmbar

Elemente für  
obere Etappen  
abnehmbar

Passstück

Passstück

Passstück

Passstück



25.03.2024

ETH Zürich | Chair of Concrete Structures and Bridge Design | Bridge Design Lectures



155



















# Conceptual Design

Holistic Design – Concluding Remarks

Ganzheitlicher Entwurf – Schlussbemerkungen

# Holistic Design – Concluding Remarks

## Interdisciplinary design team

Starting point / service criteria



Decisive boundary conditions




Design approach / potential solution



Structural concept




Detailing

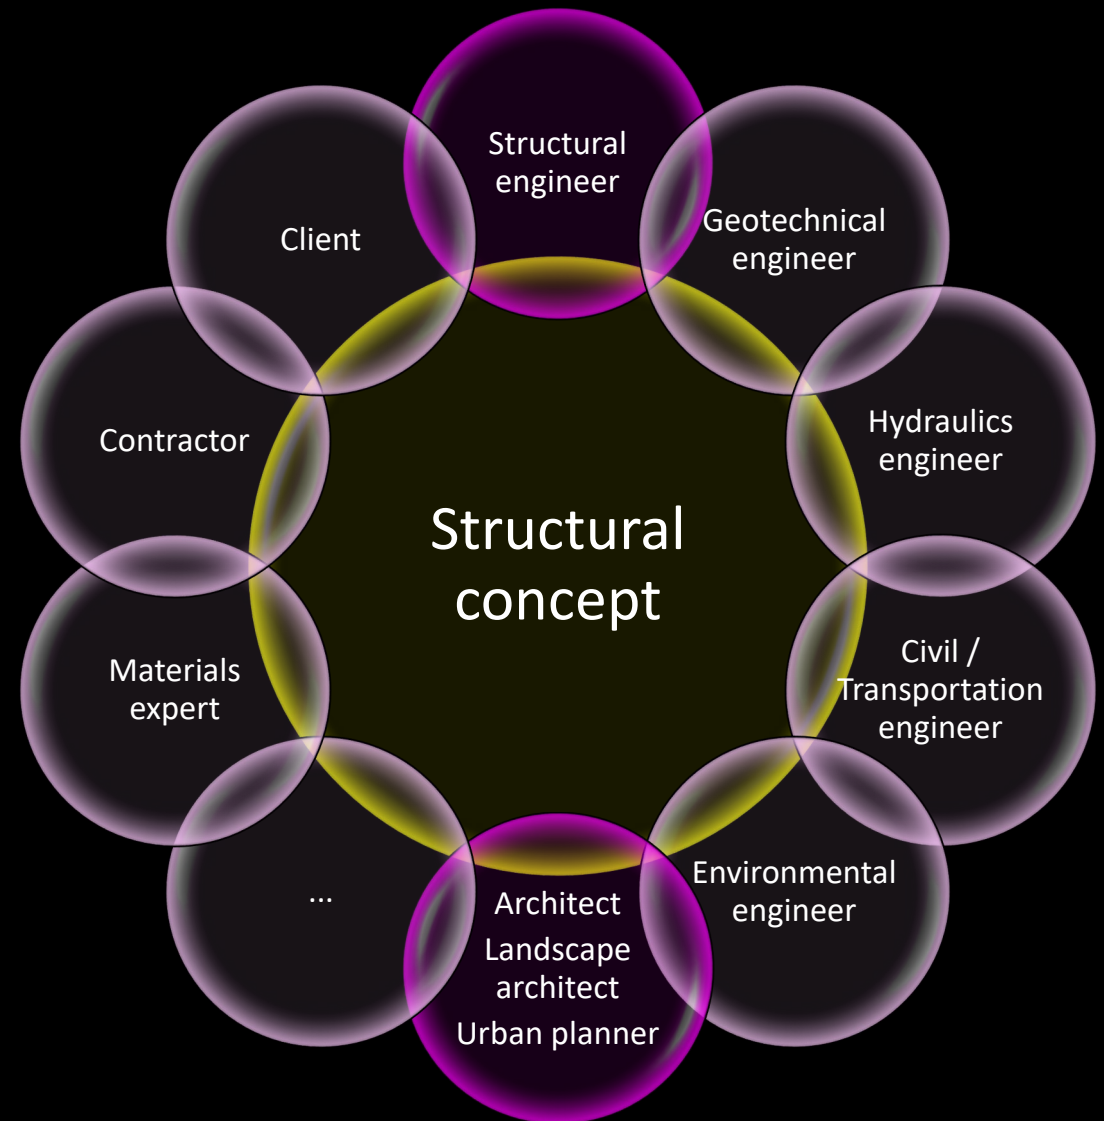

# Holistic Design – Concluding Remarks

## Interdisciplinary design team

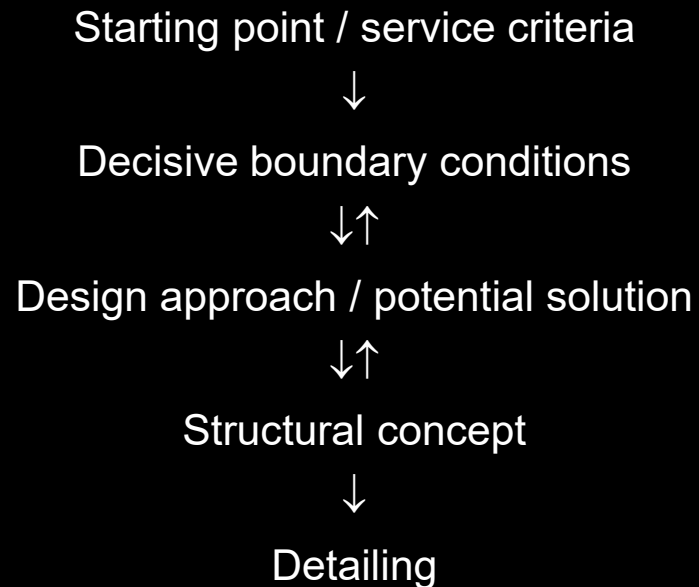

Depending on the project,  
technical or aesthetical aspects are more decisive  
for the development of the structural concept

Both aspects should receive a minimum of attention  
in all cases to avoid banality and arbitrariness

Irrespective of the importance of structural and  
technical or aesthetical aspects,  
the structural engineer – who carries the  
responsibility – is the author of the project
















# Holistic Design – Concluding Remarks

## Interdisciplinary design team

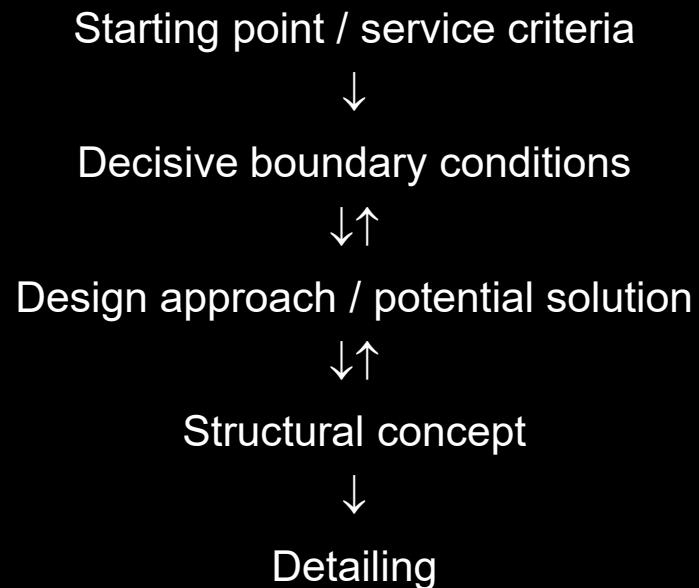

Depending on the project,  
technical or aesthetical aspects are more decisive  
for the development of the structural concept

Both aspects should receive a minimum of attention  
in all cases to avoid banality and arbitrariness

Irrespective of the importance of structural and  
technical or aesthetical aspects,  
the structural engineer – who carries the  
responsibility – is the author of the project

(this does not mean that structural engineers should  
strive for fame as “star architects”)